

TOWN OF CALEDON  
PLANNING  
RECEIVED

August 1, 2025

# Environmental Noise Feasibility Study

## Argo Mayfield West I-III


### Proposed Mixed-Use Development Town of Caledon

July 21, 2025  
Project: 123-0369 / 123-0370 / 123-0371


Prepared for

### Argo Mayfield West I Limited, Argo Mayfield West II Limited and Argo Mayfield West III Limited

Prepared by

  
Jane Hu, B.A.

Reviewed by

  
Seema Nagaraj, Ph.D., P.Eng.



**VALCOUSTICS**  
*Canada Ltd.*

## Version History

Version #	Date	Comments
1.0	September 27, 2024	Final – Issued to Client
2.0	July 21, 2025	Update - based on revised Draft Plan of Subdivision

## TABLE OF CONTENTS

EXECUTIVE SUMMARY .....	1
1.0 INTRODUCTION .....	2
1.1 THE SITE AND SURROUNDING AREA .....	3
1.2 THE PROPOSED DEVELOPMENT .....	3
2.0 NOISE SOURCES .....	4
2.1 TRANSPORTATION SOURCES .....	4
2.1.1 Road Traffic .....	4
2.1.1.1 Chinguacousy Road .....	4
2.1.1.2 Internal Collector Roadways .....	5
2.2 STATIONARY SOURCES .....	6
3.0 ENVIRONMENTAL NOISE GUIDELINES .....	7
3.1 TRANSPORTATION SOURCES .....	7
3.1.1 MECP Publication NPC-300 .....	7
3.1.1.1 Architectural Elements .....	7
3.1.1.2 Ventilation .....	7
3.1.1.3 Outdoors .....	7
3.1.2 Region Of Peel .....	8
3.1.3 Town Of Caledon .....	8
4.0 NOISE IMPACT ASSESSMENT .....	8
4.1 METHOD .....	8
4.2 RESULTS .....	9
4.3 NOISE ABATEMENT REQUIREMENTS .....	11
4.3.1 Indoors .....	11
4.3.1.1 Architectural Requirements .....	11
4.3.1.2 Ventilation Requirements .....	12
	.../cont'd

---

## TABLE OF Contents (continued)

4.3.2	Outdoors.....	12
4.3.2.1	Notes About The Sound Barrier Requirements .....	13
4.4	WARNING CLAUSES .....	13
5.0	FUTURE DEVELOPMENT BLOCKS .....	15
6.0	CONCLUSIONS.....	16
7.0	REFERENCES .....	16

### LIST OF TABLES

TABLE 1	ROAD TRAFFIC DATA .....	6
TABLE 2	PREDICTED UNMITIGATED SOUND LEVELS OUTDOORS.....	9
TABLE 3	MINIMUM NOISE ABATEMENT MEASURES.....	14

### LIST OF FIGURES

FIGURE 1	KEY PLAN
FIGURE 2	SITE PLAN

### LIST OF APPENDICES

APPENDIX A	TRAFFIC DATA CORRESPONDENCE
APPENDIX B	ENVIRONMENTAL NOISE GUIDELINES
APPENDIX C	SAMPLE SOUND LEVEL CALCULATIONS – TRANSPORTATION SOURCES

# Environmental Noise Feasibility Study

## Argo Mayfield West I-III

### Proposed Mixed-Use Development Town of Caledon

#### **EXECUTIVE SUMMARY**

Valcoustics Canada Ltd. (VCL) previously prepared an Environmental Noise Feasibility Study, dated September 27, 2024, for the proposed mixed-use development in support of the Draft Plan of Subdivision application submission to the Town of Caledon. This updated assessment has been prepared to address revisions to the proposed Draft Plan of Subdivision. The calculations have also been updated using traffic volumes from the latest traffic study for the development.

The proposed development will consist of detached dwellings (Blocks 1 to 355), street townhouses (Blocks 356 to 396), rear lane townhouses (Blocks 397 to 405), dual-frontage townhouses (Block 406 to 408), back-to-back townhouses (Blocks 409 to 423), three blocks for medium-high density residential development (Blocks 424 to 426), a school block (Block 427), a neighbourhood park block (Block 428), open space (Blocks 429 to 431), and a stormwater management pond (Block 432). Residential reserve part blocks (Blocks 435 to 501) throughout the site will be combined with neighbouring developments to create full detached or townhouse dwelling blocks.

The transportation noise source with the potential for impact at the subject site is road traffic on Chinguacousy Road as well as the new internal roadways in the development (Tim Manley Avenue, Alexander Gillespie Avenue, Speersville Avenue, and Welsh Avenue). There are no stationary noise sources in the vicinity with the potential for impact at the subject site.

To meet the noise guideline limits:

- Mandatory air conditioning is required for the first row of dwellings from Chinguacousy Road, specifically:
  - All dwelling units in Blocks 406 to 408 and Residential Reserve Block 471; and,
  - The easternmost dwelling unit in Block 396 and Residential Reserve Blocks 492 and 493.

- The provision for adding air conditioning is required at dwellings throughout the development. Refer to Figure 2 and Table 3 for specific blocks/locations.
- For the first row of dwellings from Chinguacousy Road, exterior wall construction meeting Sound Transmission Class (STC) 37 and exterior windows with ratings up to STC 30 will mitigate the indoor sound levels to the noise criteria.

Exterior wall construction meeting the minimum non-acoustical requirements of the Ontario Building Code (OBC) is expected to achieve a rating of STC 37. If upgraded exterior wall construction with a higher STC rating is used (e.g. brick veneer), the window STC requirements are expected to decrease.

- At all other locations, exterior wall and window construction meeting the minimum non-acoustical requirements of the Ontario Building Code (OBC) will be sufficient to meet the indoor noise criteria.
- Sound barriers are required (see Figure 2 for specific locations):
  - 2.4 m high at the easternmost unit in townhouse Block 396, siding directly onto Chinguacousy Road;
  - 2.2 m high at the remaining dwellings in Block 396; and,
  - 1.8 m high at:
    - the easternmost dwellings in the townhouse Blocks 387 and 388;
    - all dwellings siding onto Tim Manley Avenue (detached dwelling Blocks 1, 60, 61, 116, 147, 148, and the northernmost townhouse dwellings in Blocks 367 and 368;
    - all dwellings siding onto Alexander Gillespie Avenue and Welsh Avenue (Block 32, 33, 79, 231, 299, 300; the northernmost dwellings in the residential reserve blocks 478 to 489; and the westernmost dwellings in the townhouse blocks 356 and 361); and
    - the detached dwellings backing onto the stormwater management pond (Block 87 to 91, 394, and 395, and the residential reserve block 472).

Plans showing the layouts for the medium-high density residential blocks and the future school block have not yet been prepared. The noise control requirements at these blocks should be determined once the site layout has been finalized. This should be done as part of the SPA applications for these blocks.

## 1.0 INTRODUCTION

Valcoustics Canada Ltd. (VCL) previously prepared an Environmental Noise Feasibility Study, dated September 27, 2024, for the proposed mixed-use development in support of the Draft Plan of Subdivision application submission to the Town of Caledon. This updated assessment has been prepared to address revisions to the proposed Draft Plan of Subdivision. The calculations have also been updated using traffic volumes from the latest traffic study for the development.

The sound levels from the environmental noise sources have been predicted on site and compared to the applicable MECP, Region of Peel and Town of Caledon noise guideline limits. Where sound level excesses above these guideline limits occur, noise mitigation measures have been recommended.

## **1.1 THE SITE AND SURROUNDING AREA**

The subject site is located within the Alloo Secondary Plan area in the Town of Caledon. The site is bounded by:

- Chinguacousy Road, with residential dwellings currently under construction beyond, to the east;
- Future residential and mixed-use development (part of the Alloo Secondary Plan), with Mayfield Road beyond, to the south;
- Future residential development to the west (part of the Alloo Secondary Plan); and
- Future natural heritage system blocks, stormwater management pond blocks and residential development (part of the Alloo Secondary Plan) to the north.

Note that the site consists of a northern portion (consisting of two adjacent parcels) and a southern portion (one parcel). The land between the two portions will consist of detached dwellings, townhouse blocks, and part blocks that will, in the future, be combined with the school block and residential part blocks on the subject site.

The site is currently occupied by agricultural land and associated single-family dwellings that will be demolished as part of the development.

Figure 1 shows a key plan.

This report was prepared using the Draft Plan of Subdivision, prepared by Glen Schnarr and Associates, dated June 10, 2025. The Draft Plan of Subdivision is included as Figure 2.

## **1.2 THE PROPOSED DEVELOPMENT**

The revised draft plan has adjusted the locations of the public elementary school block, the neighbourhood park block, and the medium-high density residential blocks such that all of these blocks are now located adjacent to Tim Manley Avenue. As a result, some changes to the detached and townhouse block lot fabric around the north of the site have occurred. The course of Welsh Avenue has also been adjusted such that it now runs through the south parcel of the site, where it had previously curved south to run along the south boundary of the subject site. Aside from these changes, the general site concept and dwelling types are similar to the previous plan.

The proposed development will consist of detached dwellings (Blocks 1 to 355), street townhouses (Blocks 356 to 396), rear lane townhouses (Blocks 397 to 405), dual-frontage

townhouses (Block 406 to 408), back-to-back townhouses (Blocks 409 to 423), three blocks for medium-high density residential development (Blocks 424 to 426), a school block (Block 427), a neighbourhood park block (Block 428), open space (Blocks 429 to 431), and a stormwater management pond (Block 432). Residential reserve part blocks (Blocks 435 to 501) throughout the site will be combined with neighbouring developments to create full detached or townhouse dwelling blocks.

It is understood that all townhouse blocks and detached dwellings will be two storeys with a potential additional loft space.

The detached dwellings and the standard townhouses will be provided with grade-level rear yard outdoor amenity space. The rear lane, dual-frontage, and back-to-back townhouses will be provided with small (less than 4 m in depth) private balconies or terraces.

## **2.0 NOISE SOURCES**

### **2.1 TRANSPORTATION SOURCES**

There are road noise sources in the area that could impact the proposed residential development. There are no rail lines in the vicinity of the site. The site lies outside airport noise influence areas (i.e., areas at NEF/NEP 25 or higher). Thus, rail and aircraft noise were not considered further in this study.

#### **2.1.1 Road Traffic**

The roadways with the potential to impact the site are Chinguacousy Road and the internal collector roadways (Tim Manley Avenue, Alexander Gillespie Avenue, Speersville Avenue and Welsh Avenue). Other roadways are either far enough removed from the site or are anticipated to have low traffic volumes and are not expected to create a significant noise impact on the site.

The road traffic data is discussed below and summarized in Table 1. Road traffic data is included as Appendix A.

##### **2.1.1.1 Chinguacousy Road**

Future (year 2041) traffic volumes for Chinguacousy Road were obtained from the Traffic Impact Study (TIS) prepared for the subject lands by C.F. Crozier & Associates, Inc., dated December 2024 (Reference 7). The traffic volumes were provided in the form of future peak hour turning movement count (TMC) data. The 24-hour traffic volumes were calculated by multiplying the higher of the AM or PM peak hour volume by 10. The year 2041 volume was projected to the year 2045, using a growth rate of 2% compounded annually. This growth rate is consistent with the rate used in the TIS for Chinguacousy Road.

Truck percentages were not included in the future traffic data. Truck percentages for Chinguacousy Road were therefore calculated using the year 2024 TMC data provided in the TIS.



For this analysis, it was assumed that these truck percentages would also be applicable to the year 2045 condition.

The day/night split for Chinguacousy Road was assumed to be 90%/10%, as is typical for well travelled roadways. The speed limit on Chinguacousy Road is 60 km/h.

#### 2.1.1.2 Internal Collector Roadways

The future internal collector roadways with the potential for impact at the subject site are shown on the TIS as Street A (Welsh Avenue), Street B (Tim Manley Avenue), Street D (Alexander Gillespie Avenue), and Street E (Speersville Avenue).

Future (year 2041) traffic volumes for these future internal roadways were provided in the TIS in the form of peak hour TMC data. The 24-hour traffic volumes were calculated by multiplying the higher of either the AM or PM peak hour volume by 10.

The TIS indicated that any traffic growth on the internal collectors would be attributable to the planned buildout of the Secondary Plan area, which was already captured in the calculations. The TIS did not apply any growth to the collector roads. To be consistent with the TIS, the year 2041 traffic volumes for the internal collector roadways were also applied to the year 2045 condition in this study.

Current truck percentages are not available for the future internal roadways. The TIS included existing (year 2024) truck volumes at streets expected to connect/continue from the internal collector roadways within the subject site. Thus, the existing truck percentages on these existing roadways were used to estimate the future truck percentages on the internal roadways in the development.

The 2024 TMC data indicated that the truck percentage was approximately 5% of the total vehicle volume on the existing roadways outside of the site. All internal roadways were therefore assumed to have a future total truck percentage of 5%. It is noted that the current truck volumes mostly consist of buses (medium trucks). However, to be conservative, the future medium and heavy truck percentages on the internal roadways were assumed to be 60% and 40% of the total truck volume, respectively.

It should be noted that the 2024 TMC for the existing portion of Tim Manley Avenue indicated that the truck percentages are as high as 25%. However, it was noted during a site visit by VCL staff that the traffic on Tim Manley Avenue was dominated by construction vehicles associated with the new residential subdivision under construction on the east side of Chinguacousy Road. The truck volumes are expected to be lower once construction is complete. Tim Manley Avenue were therefore also modelled with a total of 5% trucks, split 60%/40% medium/heavy.

The day/night splits for all roadways were assumed to be 90%/10%, as is typical for well travelled roadways. The traffic consultant indicated that the speed limits on the future internal collector roadways are expected to be 50 km/h. Tim Manley Avenue is expected to be 60 km/h.

**TABLE 1 ROAD TRAFFIC DATA**

Roadway	24-Hour Traffic Volume <sup>(1)</sup>	% Trucks		Speed Limit (kph) <sup>(3)</sup>	Day/Night Split (%)
		Medium	Heavy		
Chinguacousy Road	22 950 (24 842)	3.3	2.2	60	90/10
Tim Manley Avenue	8 330 (8 330)	3	2	60	90/10
Alexander Gillespie Avenue	3 540 (3 540)	3	2	50	90/10
Speersville Avenue	1 020 (1 020)	3	2	50	90/10
Welsh Avenue	5 710 (5 710)	3	2	50	90/10

**Notes:**

- (1) Year 2041 traffic volumes were provided in the TIS in the form of peak hour TMCs. The 24-hour traffic volumes were calculated by multiplying the higher of the AM and PM peak hour volumes by 10. For Chinguacousy Road, the year 2041 volume was projected to the year 2045 at a growth rate of 2%, compounded annually. The volumes on the internal collector roadways were not projected, as the TIS indicates that no further growth is expected (i.e. the year 2041 volumes also represent the year 2045 condition). The traffic volumes shown in brackets represent the year 2045 volumes.
- (2) Truck percentages were calculated from the existing (year 2024) turning movement counts. Speed limits were provided by C.F. Crozier & Associates Inc. The day/night splits were assumed.
- (3) Vehicle speeds 10 kph higher than the indicated speed limit were used in the analysis, per Town of Caledon guidelines.

## 2.2 STATIONARY SOURCES

An existing transformer station is located at the northwest corner of Mayfield Road and Chinguacousy Road, approximately 390 m away from the closest planned residential block (Block 358) in the draft plan. During a site visit by VCL staff on June 21, 2024, observations were made from the south property line of the transformer station (close to Mayfield Road). No large fans or cooling equipment was visible, and noise from the transformer station was not audible at this location over the ambient traffic noise from Mayfield Road. Thus, due to the distance separation from the subject site as well as the on-site observations, noise from the transformer station is not anticipated to have a significant impact at the subject site. Thus, this transformer station has not been considered further in the study.

There are future mixed-use blocks along Mayfield Road in some of the development parcels to the south of the subject site. These blocks must be designed to meet the environmental noise guidelines of the MECP at the neighbouring residential dwellings, including dwellings within the subject site. As such, the future mixed-use blocks have not been considered further in this study.

## 3.0 ENVIRONMENTAL NOISE GUIDELINES

### 3.1 TRANSPORTATION SOURCES

#### 3.1.1 MECP Publication NPC-300

The applicable noise guidelines for new residential development are those in MECP Publication NPC-300, “*Environmental Noise Guideline, Stationary and Transportation Sources – Approval and Planning*”.

The environmental noise guidelines of the MECP (Publication NPC-300) are discussed briefly below and summarized in Appendix C.

##### 3.1.1.1 Architectural Elements

In the daytime (0700 to 2300), the indoor criterion for road noise is  $L_{eq\ Day}^{(1)}$  of 45 dBA for sensitive spaces such as living/dining rooms, dens and bedrooms. At night, the indoor criterion for road noise is  $L_{eq\ Night}^{(2)}$  of 45 dBA for sensitive spaces such as living/dining rooms and dens and 40 dBA for bedrooms.

The architectural design of the building envelope (walls, windows, etc.) must provide adequate sound isolation to achieve the above indoor sound level limits applying the outdoor sound level predicted at the facades.

##### 3.1.1.2 Ventilation

When the daytime sound level ( $L_{eq\ Day}$ ) at the exterior face of a noise sensitive window is greater than 65 dBA, means must be provided so that windows can be kept closed for noise control purposes and central air conditioning is required. For daytime sound levels between 56 dBA and 65 dBA inclusive, there need only be the provision for adding air conditioning. A warning clause advising the occupant of the potential interference with some activities is also required. At nighttime, air conditioning is required when the sound level exceeds 60 dBA ( $L_{eq\ Night}$ ) at a noise sensitive window (provision for adding air conditioning is required when the sound level is greater than 50 dBA).

##### 3.1.1.3 Outdoors

For OLA's, the guideline objective is 55 dBA  $L_{eq\ Day}$ , with an excess not exceeding 5 dBA considered acceptable if it is not feasible to achieve the 55 dBA objective for technical, economic or administrative reasons, provided warning clauses are registered on title. Note, a balcony or elevated terrace is not considered an OLA unless it is:

(1)  $L_{eq\ Day}$  16-hour energy equivalent sound level (0700-2300 hours).  
(2)  $L_{eq\ Night}$  8-hour energy equivalent sound level (0700-2300 hours).

- the only OLA for the occupant;
- at least 4 m in depth; and
- unenclosed

### 3.1.2 Region of Peel

The Region of Peel's noise guidelines are described in the "General Guidelines for the Preparation of Acoustical Reports in the Region of Peel" document (Reference 5). The Region of Peel noise guidelines are essentially the same as the MECP noise guidelines for transportation noise sources except that the nighttime sound level for triggering the air conditioning requirement is 1 dBA more stringent (i.e., less) than the sound level specified by the MECP; i.e., mandatory air conditioning for nighttime sound levels of 60 dBA or greater, and the provision for adding air conditioning for sound levels between 51 to 59 dBA inclusive.

The Peel guidelines also indicate a maximum desirable sound barrier height of 4.0 m (relative to the roadway centreline) with a maximum acoustic fence height of 2.4 m, although a height of no more than 2.0 m is preferred. To make up any additional height beyond that of the fence, a berm is to be used.

### 3.1.3 Town of Caledon

The Town of Caledon noise guidelines are described in the "Development Standards Manual" document (Reference 6). The Town of Caledon's general policy is not to accept any excess above the 55 dBA objective for OLA's. However, an excess may be acceptable if unreasonably high sound barriers are needed to meet the 55 dBA objective.

The Town's maximum acoustic fence height is 2.4 m. Higher barriers can be provided by using a combination of an acoustic fence and a berm. The maximum permitted sound barrier height according to the Town's Development Standards is 4.8 m (2.4 m fence atop a 2.4 m berm).

Road traffic noise levels are to be calculated using a minimum 20-year traffic forecast and a speed of 10 kph over the posted speed limit.

## 4.0 NOISE IMPACT ASSESSMENT

### 4.1 METHOD

Using the road traffic data in Table 1, the  $L_{eq \text{ Day}}$  and  $L_{eq \text{ Night}}$  were determined using STAMSON V5.04 – ORNAMENT, the computerized road traffic noise prediction models of the MECP.

As previously noted, all dwellings are expected to be 2 storeys, with a potential loft space. To be conservative, the daytime and nighttime sound levels at all building facades were assessed at a height of 7.5 m above grade, representing a loft-height plane of window (the worst-case location).

The daytime OLA sound levels at the rear yard outdoor amenity areas were assessed at a height of 1.5 m above grade, 3 m from the midpoint of the rear dwelling facade.

See Figure 2 for the assessment receptor locations.

Inherent screening of each building face due to its orientation to the noise source as well as screening provided by the subject development itself was taken into account. To be conservative, screening from the future development, including all residential reserve part blocks that will be combined with neighbouring parcels in the future, was not included. The stormwater management pond is modelled as a reflective surface.

## 4.2 RESULTS

The highest unmitigated daytime/nighttime sound levels of 67/61 dBA are predicted to occur at the east facade of Block 396 (receptor R1), the closest dwelling to Chinguacousy Road.

The highest unmitigated daytime OLA sound level of 64 dBA is predicted to occur at the rear yard associated with Block 396, with the greatest exposure to Chinguacousy Road (receptor R6).

Table 2 summarizes the unmitigated daytime and nighttime sound level predictions.

Appendix C contains a sample sound level calculation.

**TABLE 2 PREDICTED UNMITIGATED SOUND LEVELS OUTDOORS**

Location <sup>(1)</sup>	Source	Distance (m) <sup>(2)</sup>	Leq Day (dBA)	Leq Night (dBA)
R1 Block 396 East Facade	Chinguacousy Road	23	<b>67</b>	<b>61</b>
R2 Block 396 North Facade	Chinguacousy Road	23	<b>65</b>	<b>58</b>
R3 Block 387 East Facade	Chinguacousy Road	38	64	57
	Tim Manley Avenue	113	49	43
	<b>TOTAL</b>	-	<b>64</b>	<b>58</b>
R4 Block 387 South Façade	Chinguacousy Road	38	61	55
	Tim Manley Avenue	113	52	45
	<b>TOTAL</b>	-	<b>62</b>	<b>55</b>
R5 Block 387 Rear Yard OLA	Chinguacousy Road	43	<b>60</b>	-
R6 Block 396 Rear Yard OLA	Chinguacousy Road	28	<b>64</b>	-
R7 Block 395 Rear Yard OLA	Chinguacousy Road	67	<b>61</b>	-
R8 Block 87 East Facade	Chinguacousy Road	137	<b>60</b>	<b>53</b>

.../cont'd

**TABLE 2 PREDICTED UNMITIGATED SOUND LEVELS OUTDOORS (continued)**

Location <sup>(1)</sup>	Source	Distance (m) <sup>(2)</sup>	Leq Day (dBA)	Leq Night (dBA)
R9 Block 87 Rear Yard OLA	Chinguacousy Road	136	60	-
R10 Block 366 East Facade	Chinguacousy Road	242	48	41
	Tim Manley Avenue	45	55	48
	<b>TOTAL</b>	-	<b>55</b>	<b>49</b>
R11 Block 368 North Facade	Tim Manley Avenue	25	62	55
	Alexander Gillespie Avenue	16	56	50
	<b>TOTAL</b>	-	<b>63</b>	<b>56</b>
R12 Block 368 West Facade	Tim Manley Avenue	25	59	52
	Alexander Gillespie Avenue	16	59	53
	<b>TOTAL</b>	-	<b>62</b>	<b>56</b>
R13 Block 368 Rear Yard OLA	Tim Manley Avenue	28	<b>58</b>	-
R14 Block 231 East Facade	Alexander Gillespie Avenue	17	<b>59</b>	<b>53</b>
R15 Block 231 Rear Yard OLA	Alexander Gillespie Avenue	22	<b>56</b>	-
R16 Block 230 North Facade	Alexander Gillespie Avenue	28	<b>53</b>	<b>46</b>
R17 Block 230 Rear Yard OLA	Alexander Gillespie Avenue	32	<b>52</b>	-
R18 Block 1 South Facade	Tim Manley Avenue	19	64	57
	Speersville Avenue	154	36	29
	<b>TOTAL</b>	-	<b>64</b>	<b>57</b>
R19 Block 1 Rear Yard OLA	Tim Manley Avenue	24	60	-
	Speersville Avenue	151	34	-
	<b>TOTAL</b>	-	<b>60</b>	-
R20 Block 305 East Facade	Alexander Gillespie Avenue	16	59	53
	Welsh Avenue	20	57	50
	<b>TOTAL</b>	-	<b>61</b>	<b>55</b>
R21 Block 402 North Facade	Welsh Avenue	15	62	55
	Speersville Avenue	24	49	42
	<b>TOTAL</b>	-	<b>62</b>	<b>56</b>

.../cont'd

**TABLE 2 PREDICTED UNMITIGATED SOUND LEVELS OUTDOORS (continued)**

Location <sup>(1)</sup>	Source	Distance (m) <sup>(2)</sup>	L <sub>eq</sub> Day (dBA)	L <sub>eq</sub> Night (dBA)
R22 Block 476 Rear Yard OLA	Speersville Avenue	23	49	-
R23 Block 479 Rear Yard OLA	Welsh Avenue	17	<b>60</b>	-
R24 Block 417 East Façade	Chinguacousy Road	62	<b>56</b>	<b>49</b>
R25 Block 411 North Façade	Chinguacousy Road	85	<b>55</b>	<b>49</b>
R26 Block 59 East Façade	Alexander Gillespie Avenue	192	42	35
	Tim Manley Avenue	32	57	51
	<b>TOTAL</b>	-	<b>57</b>	<b>51</b>

Notes:

(1) See Figure 2.

(2) Distance indicated is from the centreline of the roadway to the facade or OLA.

### 4.3 NOISE ABATEMENT REQUIREMENTS

The noise control measures can generally be classified into two categories which are interrelated, but which can be treated separately for the most part:

- The sound isolation performance of architectural elements to achieve the indoor noise guideline sound levels for transportation sources; and
- design features to attenuate the sound levels in the OLA's.

Noise abatement requirements/recommendations are summarized in Table 3 and in the notes to Table 3.

#### 4.3.1 Indoors

##### 4.3.1.1 Architectural Requirements

The indoor noise guideline sound levels can be achieved by using appropriate construction for exterior walls, windows and doors. In determining the worst-case architectural sound isolation requirements, exterior wall and window areas were assumed to be 80% and 30%, respectively, of the associated floor area, on both facades of a corner room with both facades exposed directly or at an angle to the transportation noise source(s).

The assessment shows that for the first row of dwellings from Chinguacousy Road, exterior wall construction meeting STC 37 and exterior windows with ratings up to STC 30 will mitigate the indoor sound levels to the noise criteria. Refer to Figure 2 and Table 3 for exact block numbers/locations.

Exterior wall construction meeting the minimum non-acoustical requirements of the OBC is expected to achieve a rating of STC 37. If upgraded exterior wall construction with a higher STC rating is used (e.g. brick veneer), the window STC requirements are expected to decrease.

For windows, the window frames themselves must also be designed to ensure that the overall sound isolation performance for the entire window unit meets the sound isolation requirement. This should be confirmed by the window manufacturer through the submission of acoustical test data.

At all remaining dwellings in the development, exterior wall and window construction meeting the minimum non-acoustical requirements of the OBC will be sufficient to meet the indoor noise criteria.

#### **4.3.1.2 Ventilation Requirements**

- Mandatory air conditioning is required for the first row of dwellings from Chinguacousy Road, specifically:
  - All dwelling units in Blocks 406 to 408 and Residential Reserve Block 471; and,
  - The easternmost dwelling units in Block 396 and Residential Reserve Blocks 492 and 493.
- The provision for adding air conditioning is required at dwellings throughout the development. Refer to Figure 2 and Table 3 for specific blocks/locations.

For detached dwellings and townhouse blocks, the provision for adding air conditioning typically takes the form of a ducted ventilation system suitably sized to permit the addition of central air conditioning by the occupant.

#### **4.3.2 Outdoors**

The unmitigated daytime OLA sound levels are predicted to exceed 55 dBA at the rear yards of dwellings adjacent to Alexander Gillespie Avenue, and Welsh Avenue, as well as dwellings backing onto the stormwater management pond at the northeast corner. The unmitigated daytime OLA sound levels are predicted to exceed 60 dBA at rear yards siding onto Chinguacousy Road. Thus, sound barriers are required.

For the dwellings adjacent to the internal roadways and the stormwater management pond, 1.8 m high barriers will be sufficient to mitigate the daytime OLA sound levels to the 55 dBA design objective of the MECP or lower.

Townhouse Block 396 sides directly onto Chinguacousy Road. To meet the 55 dBA design objective of the MECP, a 2.9 m high sound barrier would be required at the easternmost unit, and 2.2 m high sound barriers would be required at the remaining units.

It is noted that the 2.9 m high barrier exceeds the Town of Caledon's maximum acoustic fence height. A 2.4 m high acoustic fence at this location would mitigate the sound levels at the rear



yard of the easternmost unit to 57 dBA, which is within the maximum permitted sound levels of the MECP, provided warning clauses are registered on title, and is recommended. The remaining units, if provided with a 2.2 m high sound barrier, will meet the 55 dBA design target at Block 396.

- Thus, the following sound barriers are recommended (see Figure 2 for specific locations):
  - 2.4 m high at the easternmost unit in townhouse Block 396, siding directly onto Chinguacousy Road;
  - 2.2 m high at the remaining dwellings in Block 396; and,
  - 1.8 m high at:
    - the easternmost dwellings in the townhouse Blocks 387 and 388;
    - all dwellings siding onto Tim Manley Avenue (detached dwelling Blocks 1, 60, 61, 116, 147, 148, and the northernmost townhouse dwellings in Blocks 367 and 368;
    - all dwellings siding onto Alexander Gillespie Avenue and Welsh Avenue (Block 32, 33, 79, 231, 299, 300; the northernmost dwellings in the residential reserve blocks 478 to 489; and the westernmost dwellings in the townhouse blocks 356 and 361); and
    - the detached dwellings backing onto the stormwater management pond (Block 87 to 91, 394 and 395, and the residential reserve block 472).

#### 4.3.2.1 Notes about the sound barrier requirements

- It is understood that that the rear lane, dual-frontage, and back-to-back townhouse units will not have grade-level rear yard outdoor amenity areas. These units will have balconies and private terraces that are less than 4 m in depth and would therefore not be considered OLAs under the MECP noise guidelines. Thus, sound barriers are not required for noise control purposes at these locations.
- Sound barriers must be of solid construction with no gaps, cracks or holes (except for small, localized openings required for water drainage) and must have a minimum surface weight of 20kg/m<sup>2</sup>. A variety of materials are available, including concrete, masonry, glass, wood, specialty composite materials or a combination of the above.
- The sound barrier requirements were determined using flat topography. The sound barrier requirements will need be confirmed once a grading plan is available.

## 4.4 WARNING CLAUSES

Warning clauses are a tool to inform prospective owners/occupants of potential annoyance due to existing noise sources. Where the guideline sound level limits are exceeded, appropriate warning clauses should be registered on title or included in the development agreement that is registered on title. The warning clauses should also be included in agreements of Offers of Purchase and Sale and lease/rental agreements to make future occupants aware of the potential noise situation.

Table 3 and the notes to Table 3 summarize the warning clauses for the site.

**TABLE 3 MINIMUM NOISE ABATEMENT MEASURES**

Block <sup>(1)</sup>	Unit	Air Conditioning <sup>(2)</sup>	Exterior Wall <sup>(3)</sup>	Exterior Window <sup>(4)</sup>	Sound Barrier <sup>(1)(5)</sup>	Warning Clauses <sup>(6)</sup>
396	1 <sup>st</sup> dwelling from Chinguacousy Road	Mandatory	STC 37	STC 30	2.4 m high	A + B
	All other dwellings	Provision to add	STC 37	STC 30	2.2 m high	A + C
Residential Reserve 492 and 493	1 <sup>st</sup> dwelling from Chinguacousy Road	Mandatory	STC 37	STC 30	Not required	A + B
	All other dwellings	Provision to add	STC 37	STC 30	Not required	A + C
406 to 408 and Residential Reserve 471		Mandatory	STC 37	STC 30	Not required	A + B
387, 388		Provision to add	No special acoustical requirements		1.8 m high at the easternmost dwellings	A + C
394, 395		Provision to add	No special acoustical requirements		1.8 m high at all dwellings backing onto the SWM pond	A + C
1, 32, 33, 60, 61, 79, 87 to 91, 116, 147, 148, 231, 299 and 300; Residential Reserve Block 472		Provision to add	No special acoustical requirements.		1.8 m high	A + C (+ D where adjacent to the elementary school block)
356, 361, 367, 368; Residential Reserve Blocks 478 to 489		Provision to add	No special acoustical requirements		1.8 m high at the first dwelling from Tim Manley Avenue, Alexander Gillespie Avenue, or Welsh Avenue	A + C (+ D where adjacent to the elementary school block)
Block 2, 59, 117, 132 to 146, 149, 232 to 236, 290 to 292, 301 to 331, 357, 358, 369 to 373, 397 to 399, 402 to 405, 409, 410, 417, 418, 423; and Residential Reserve 464, 465, 469, 470, 476, 490, 491, 494, 498 and 499		Provision to add	No special acoustical requirements		Not required	A + C (+ D where adjacent to the elementary school block)
All other dwellings		No special acoustical requirements				D where adjacent to the elementary school block

Notes for Table 3 are on the following page.

### **Notes to Table 3**

- (1) See Figure 2.
- (2) Where methods must be provided to allow windows to remain closed for noise control purposes, a commonly used technique is that of air conditioning.
- (3) STC – Sound Transmission Class Rating (Reference ASTM E-413).  
The requirements are based on the assumed percentages of wall and window area to associated floor area stated in Section 2.4.1 and should be reviewed once detailed floor plans are available
- (4) STC – Sound Transmission Class Rating (Reference ASTM E-413). A sliding glass walkout door should be considered as a window and be included in the percentage of glazing.  
The requirements were based on the assumed percentages of wall and window area to associated floor area stated in Section 4.3.1.1 and should be reviewed once detailed floor plans are available.
- (5) Sound barriers must be of solid construction with no gaps cracks or holes, and must have a minimum surface density of 20 kg/m<sup>2</sup>.
- (6) Standard example warning clauses to be registered on title and be included in Offers of Purchase and Sale for designated lots:
  - A. "Purchases/tenants are advised that despite the inclusion of noise control features in the development and within the building units, sound levels due to increasing road traffic may on occasions interfere with some activities of the dwelling occupants as the sound levels exceed the sound level limits of the Municipality and the Ministry of the Environment, Conservation and Parks."
  - B. "This dwelling unit has been supplied with a central air conditioning system which will allow windows and exterior doors to remain closed, thereby ensuring that the indoor sound levels are within the sound level limits of the Municipality and the Ministry of the Environment, Conservation and Parks."
  - C. "This dwelling unit has been designed with the provision for adding central air conditioning at the occupant's discretion. Installation of central air conditioning by the occupant in low and medium density developments will allow windows and exterior doors to remain closed, thereby ensuring that the indoor sound levels are within the sound level limits of the Municipality and the Ministry of the Environment, Conservation and Parks."
  - D. "Purchasers / occupants are advised that due to the proximity of the elementary school, noise from this facility may, at times, be audible".
- (7) All exterior doors shall be fully weather-stripped.

## **5.0 FUTURE DEVELOPMENT BLOCKS**

Building plans for the medium-high density residential and school block are currently not available. Specific mitigation measures have therefore not been established.

It is expected that the dwellings in these blocks would require mandatory air conditioning due to the proximity to Chinguacousy Road. Upgraded facade construction and/or upgraded exterior windows may also be expected for the dwellings closest to the roadway.

It is anticipated that all balconies and terraces in these blocks will be less than 4 m in depth and would therefore would not qualify as OLA's under the MECP guidelines. Thus, sound barriers would not be required. If larger balconies or terraces are included in the site design, the sound barrier requirements should be reviewed.

The school block would need to be designed so that noise generated by this facility complies with the stationary source sound level limits in Publication NPC-300, with consideration to the surrounding residential uses including those that are part of this proposed development.

Detailed noise studies of these blocks should be done as part of the Site Plan Approval process.

## 6.0 CONCLUSIONS

With the incorporation of the recommended noise mitigation measures, the applicable Town of Caledon, Peel Region and MECP noise guidelines can be met and a suitable acoustical environment provided for the occupants.


The approvals and administrative procedures are available to ensure that the noise requirements are implemented.

## 7.0 REFERENCES

1. PC STAMSON 5.04, "Computer Program for Road Traffic Noise Assessment", Ontario Ministry of the Environment.
2. Building Practice Note No. 56: "Controlling Sound Transmission into Buildings", by J. D. Quirt, Division of Building Research, National Council of Canada, September 1985.
3. "Environmental Noise Assessment in Land-Use Planning 1987", Ontario Ministry of the Environment, February 1987, ISBN 0-7729-2804-5.
4. MECP Publication NPC-300, "Stationary and Transportation Sources – Approval and Planning" Ontario Ministry of the Environment, August 2013.
5. "General Guidelines for the Preparation of Acoustical Reports in the Region of Peel", Region of Peel. November 2012.
6. "Development Standards Manual, Version 5.0", Town of Caledon, 2019.
7. "Transportation Impact Study, Alloo Phase 1 Lands, Tertiary Plan, Town of Caledon, Region of Peel", C.F. Crozier & Associates Inc., December 2024.
8. "Environmental Noise Feasibility Study – Argo Mayfield West I-III", Valcoustics Canada, September 27, 2024.

JHlsk  
Argo Mayfield West I-III, Caledon - Noise v2\_0.docx




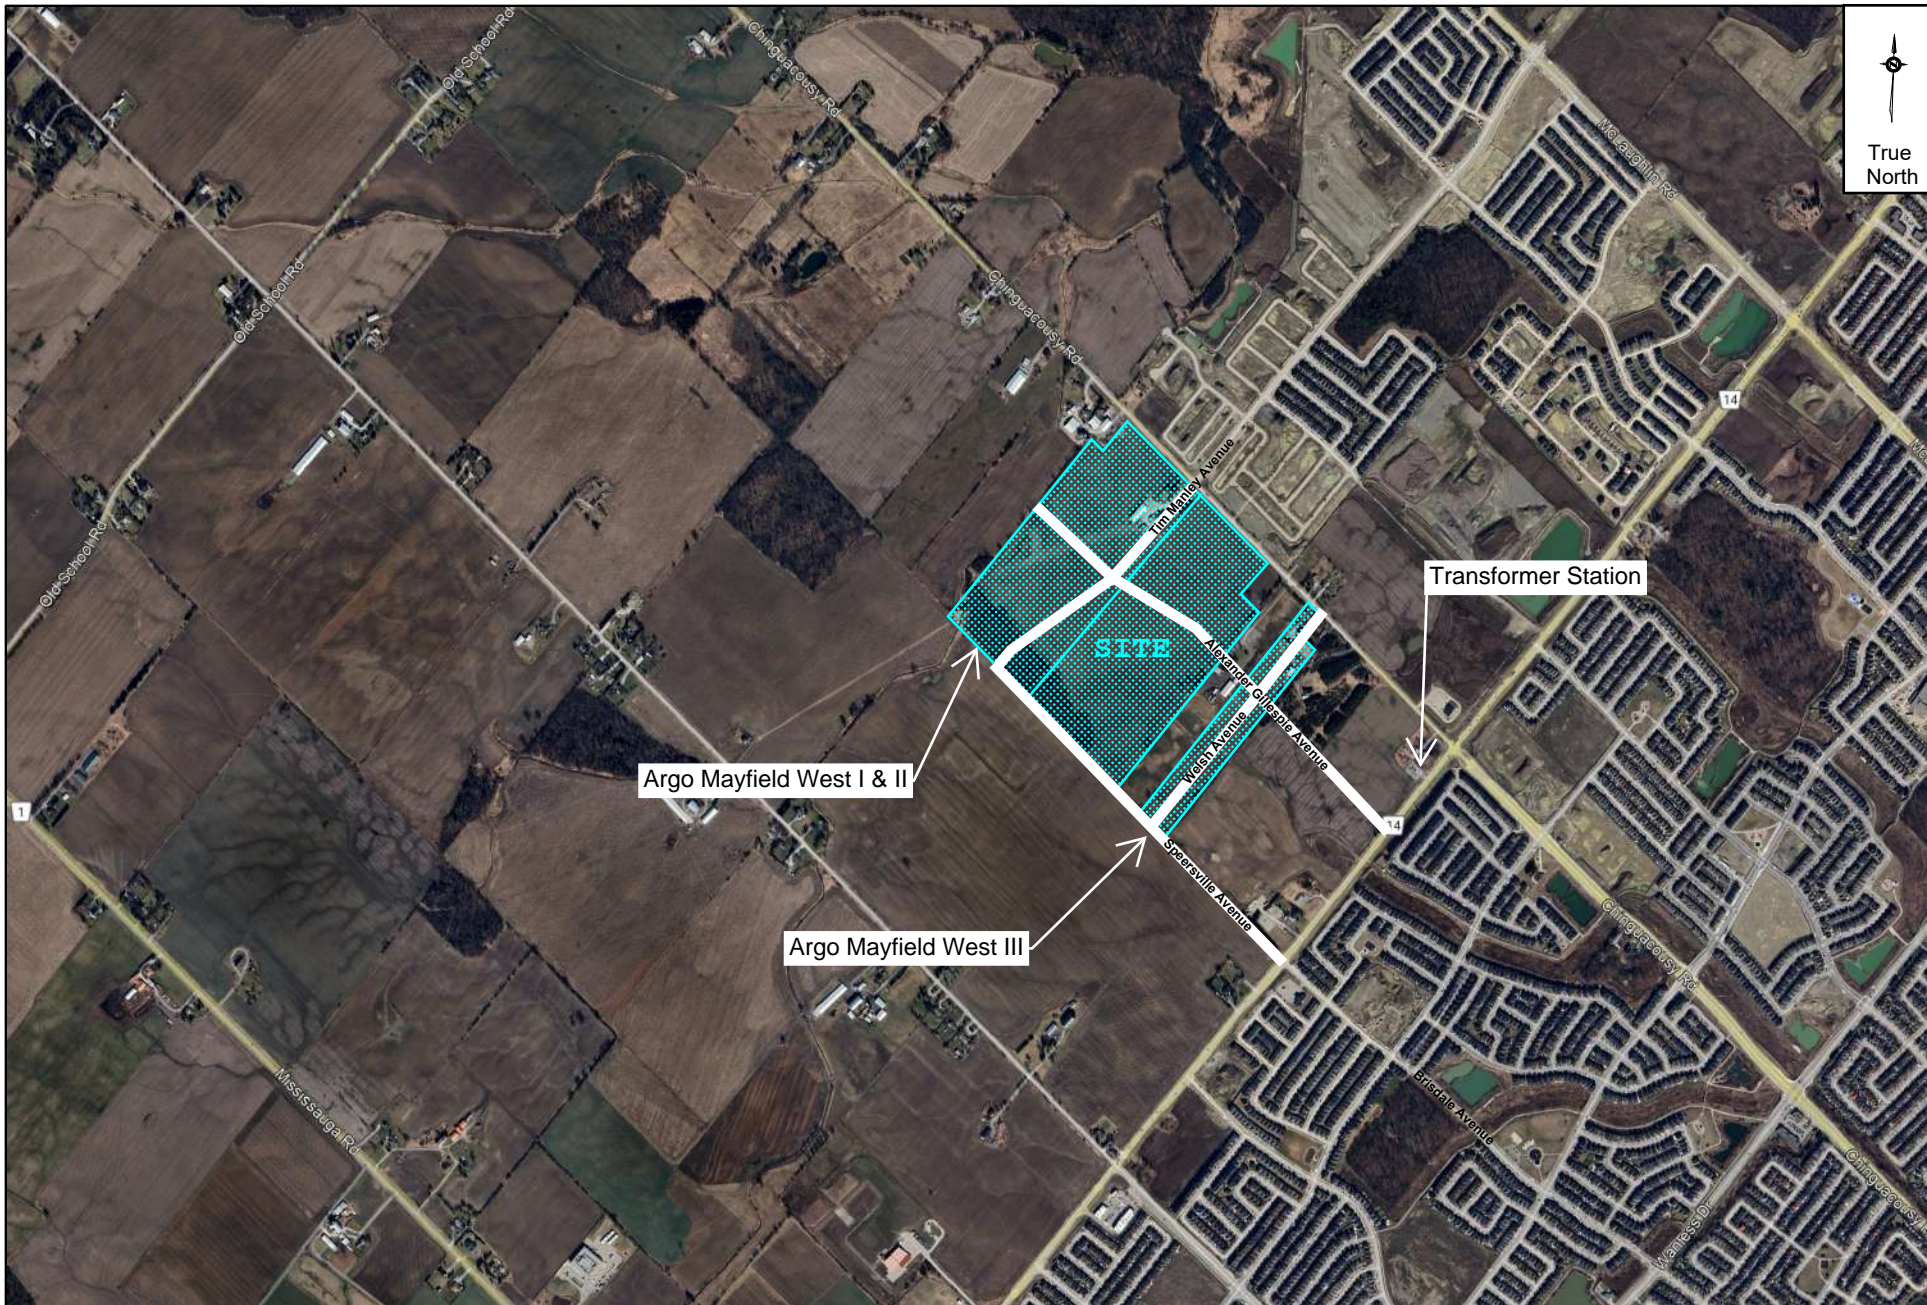


	Title	Date	<div>Figure</div> <div>1</div>
	<b>Key Plan</b>	<b>July 17, 2025</b>	
	Project Name	Project No.	
	<b>Argo Mayfield West I-III, Caledon</b>	<b>1230369.000</b>	



- Legend**
- ◆ Mandatory AC, and exterior windows up to STC 30 required.
  - ▲ Provision to add AC required.
  - 2.4 m high sound barrier required.
  - 2.2 m high sound barrier required.
  - 1.8 m high sound barrier required.
- Receptor Location**

Exterior windows and walls meeting the minimum non-acoustical requirements of the OBC are sufficient for all dwellings within the development.

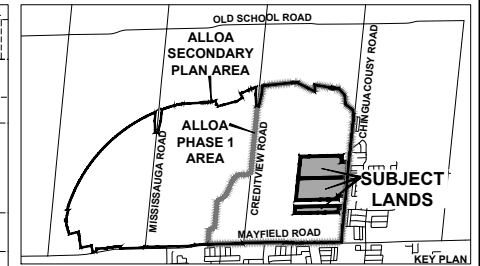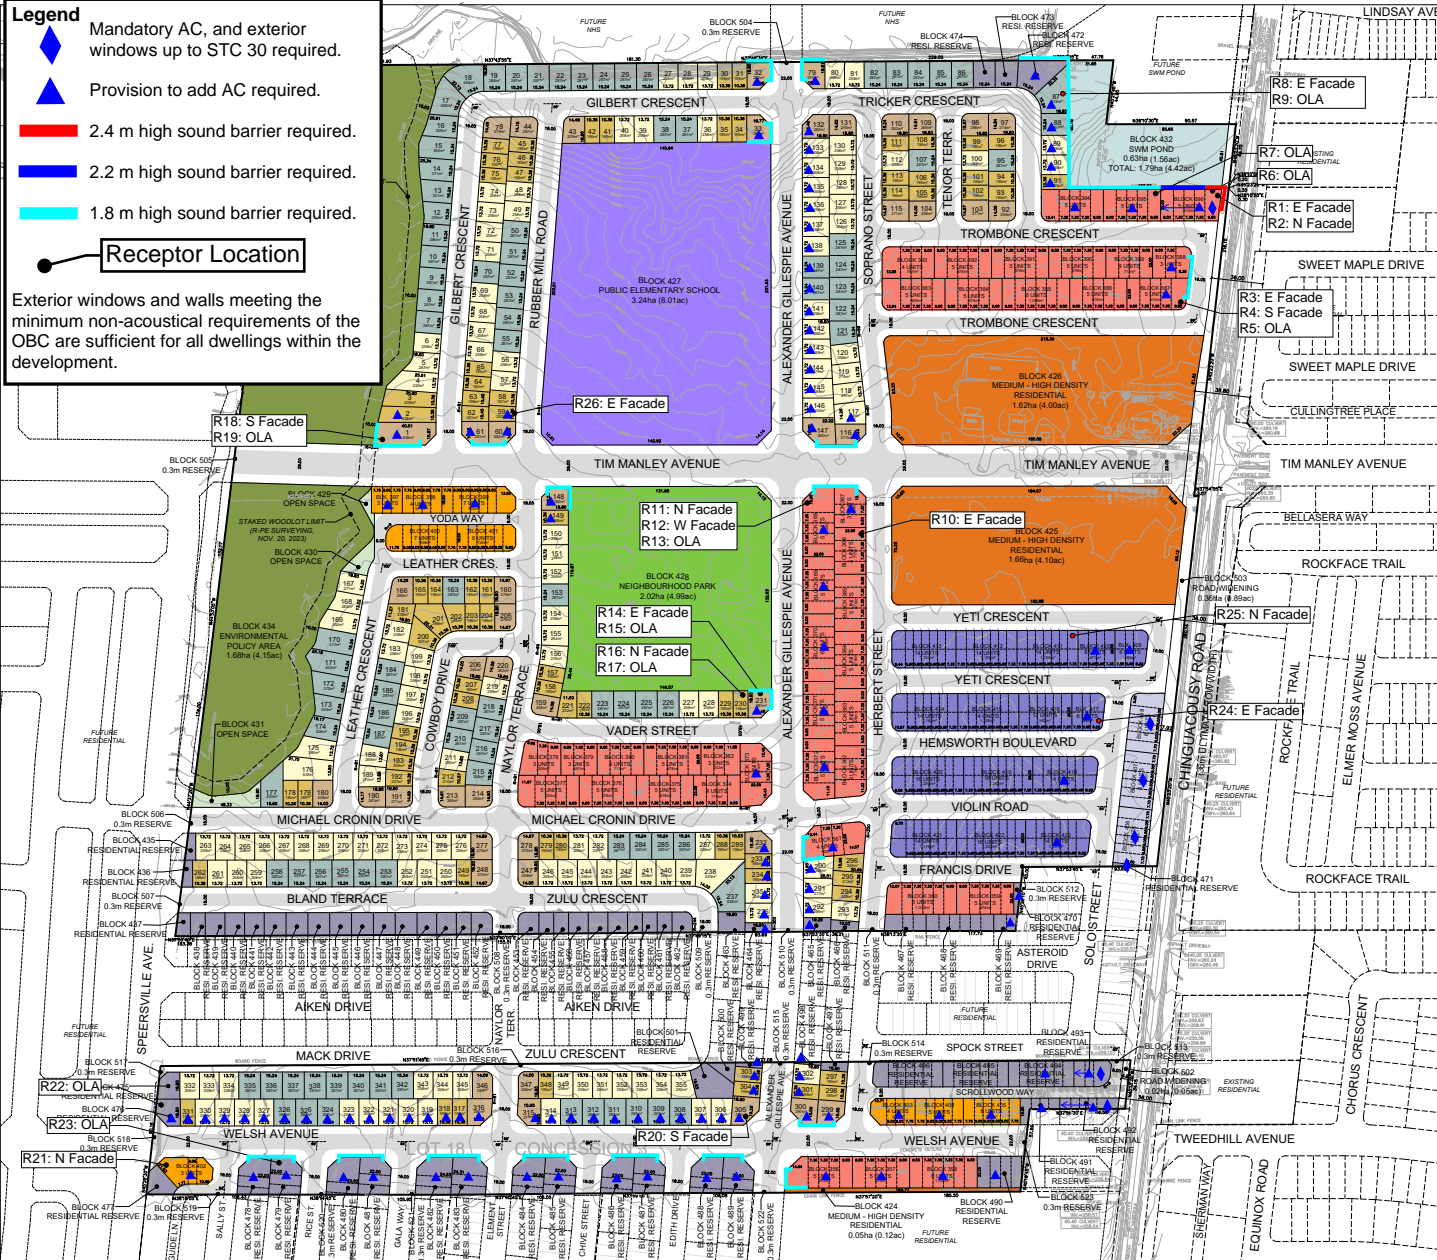

# **DRAFT PLAN OF SUBDIVISION** **ARGO MAYFIELD WEST I LIMITED,** **ARGO MAYFIELD WEST II LIMITED &** **ARGO MAYFIELD WEST III LIMITED** **FILE # 21T-24016C**

PART OF LOTS 18 & 19, CONCESSION 3,  
 WEST OF HURONTARIO STREET  
 (GEOGRAPHIC TOWNSHIP OF CHINGACOUSY)  
 TOWN OF CALEDON  
 REGIONAL MUNICIPALITY OF PEELE

## **SURVEYORS CERTIFICATE**

I HEREBY CERTIFY THAT THE BOUNDARIES OF THE LANDS TO BE SUBDIVIDED AS SHOWN ON THIS PLAN AND THEIR RELATIONSHIP TO ADJACENT LANDS ARE CORRECTLY AND ACCURATELY SHOWN.

SIGNED: PLUM KUMARAWATTE  
 A. U. KUMARAWATTE, O.L.S.  
 R.P.E. SURVEYING LTD.  
 643 CHRISLEA ROAD, SUITE 7  
 WOODBRIDGE ON, L4L 9A3  
 PHONE: (416) 635-5000

DATE: APR. 23, 2024

## **ADDITIONAL INFORMATION**

(UNDER SECTION 51(17) OF THE PLANNING ACT) INFORMATION REQUIRED BY CLAUSES A,B,C,D,E,F,G,J & L ARE SHOWN ON THE DRAFT AND KEY PLANS.

- H) MUNICIPAL AND PIPED WATER TO BE PROVIDED
- I) SANDY LOAM AND CLAY LOAM
- K) SANITARY AND STORM SEWERS TO BE PROVIDED

## **LAND USE SCHEDULE**

LAND USE	LOTS / BLOCKS	AREA (m <sup>2</sup> )	AREA (ac)	UNITS	DENSITY (UPPA)
DETACHED - 10.36m (34')		1.64	4.05	79	48.17
DETACHED - 13.72m (45')		3.63	8.97	135	37.19
DETACHED - 14.00m (46')	1-355	1.31	3.24	46	35.11
DETACHED - 15.24m (50')		2.89	7.14	95	32.87
STREET TOWNHOUSE - 7.30m (24')	356-396	3.50	8.65	191	54.57
REAR LANE TOWNHOUSE - 4.05m (20')	397-405	0.60	1.48	45	75.00
DUAL FRONTAGE TOWNHOUSE - 6.00m (20')	406-408	0.28	0.69	18	64.29
BACK-TO-BACK TOWNHOUSE - 5.60m (18')	409-423	1.57	3.88	192	122.25
MEDIUM - HIGH DENSITY RESIDENTIAL	424-426	3.32	8.20		
PUBLIC ELEMENTARY SCHOOL	427	3.24	8.01		
NEIGHBOURHOOD PARK	428	2.52	6.26		
OPEN SPACE	429-431	0.09	0.22		
SWIM POND	432	0.63	1.56		
ENVIRONMENTAL POLICY AREA	433-434	4.54	11.22		
RESIDENTIAL RESERVE	435-501	2.11	5.21		
ROAD WIDENING	502-503	0.38	0.94		
0.3m RESERVE	504-523	0.02	0.05		
10m CANEWAY R.O.W. (LENGTH 336m)		0.27	0.67		
15.0m 18.0m LOCAL R.O.W. (LENGTH 4.563m)		9.15	22.61		
22.0m COLLECTOR R.O.W. (LENGTH 1.257m)		2.81	6.94		
29.0m COLLECTOR R.O.W. (LENGTH 665m)		1.95	4.82		
<b>TOTAL</b>	<b>523</b>	<b>45.95</b>	<b>109.49</b>	<b>801</b>	<b>51.95</b>

## **NOTES**

- TIME MANLEY AVENUE & CHINGACOUSY ROAD DAYLIGHT TRIANGLE - 15.0m x 15.0m
- COLLECTOR TO COLLECTOR DAYLIGHT TRIANGLE - 10.0m x 10.0m
- LOCAL TO COLLECTOR DAYLIGHT TRIANGLE - 7.5m x 7.5m
- LANEWAY TO LOCAL / COLLECTOR DAYLIGHT TRIANGLE - 3.0m x 3.0m
- LOCAL TO LOCAL DAYLIGHT TRIANGLE - 3.0m x 3.0m
- PAVEMENT ILLUSTRATION IS DIAGRAMMATIC
- ALL INTERSECTION ANGLES ARE 90° UNLESS OTHERWISE NOTED

SCALE: 1:1500  
 (24 x 36)  
 JUNE 10, 2025

**ARGO**  
 DEVELOPMENT CORP

**GSAI**  
 Glen Schnarr & Associates Inc.

Base drawing prepared by Glen Schnarr and Associates, 2025



Title  
**Draft Plan of Subdivision**

Project Name  
**Argo Mayfield West I-III, Caledon**

Date  
**July 17, 2025**


Project No.  
**1230369.000**

Figure  
**2**

# **APPENDIX A**

## **TRAFFIC DATA CORRESPONDENCE**



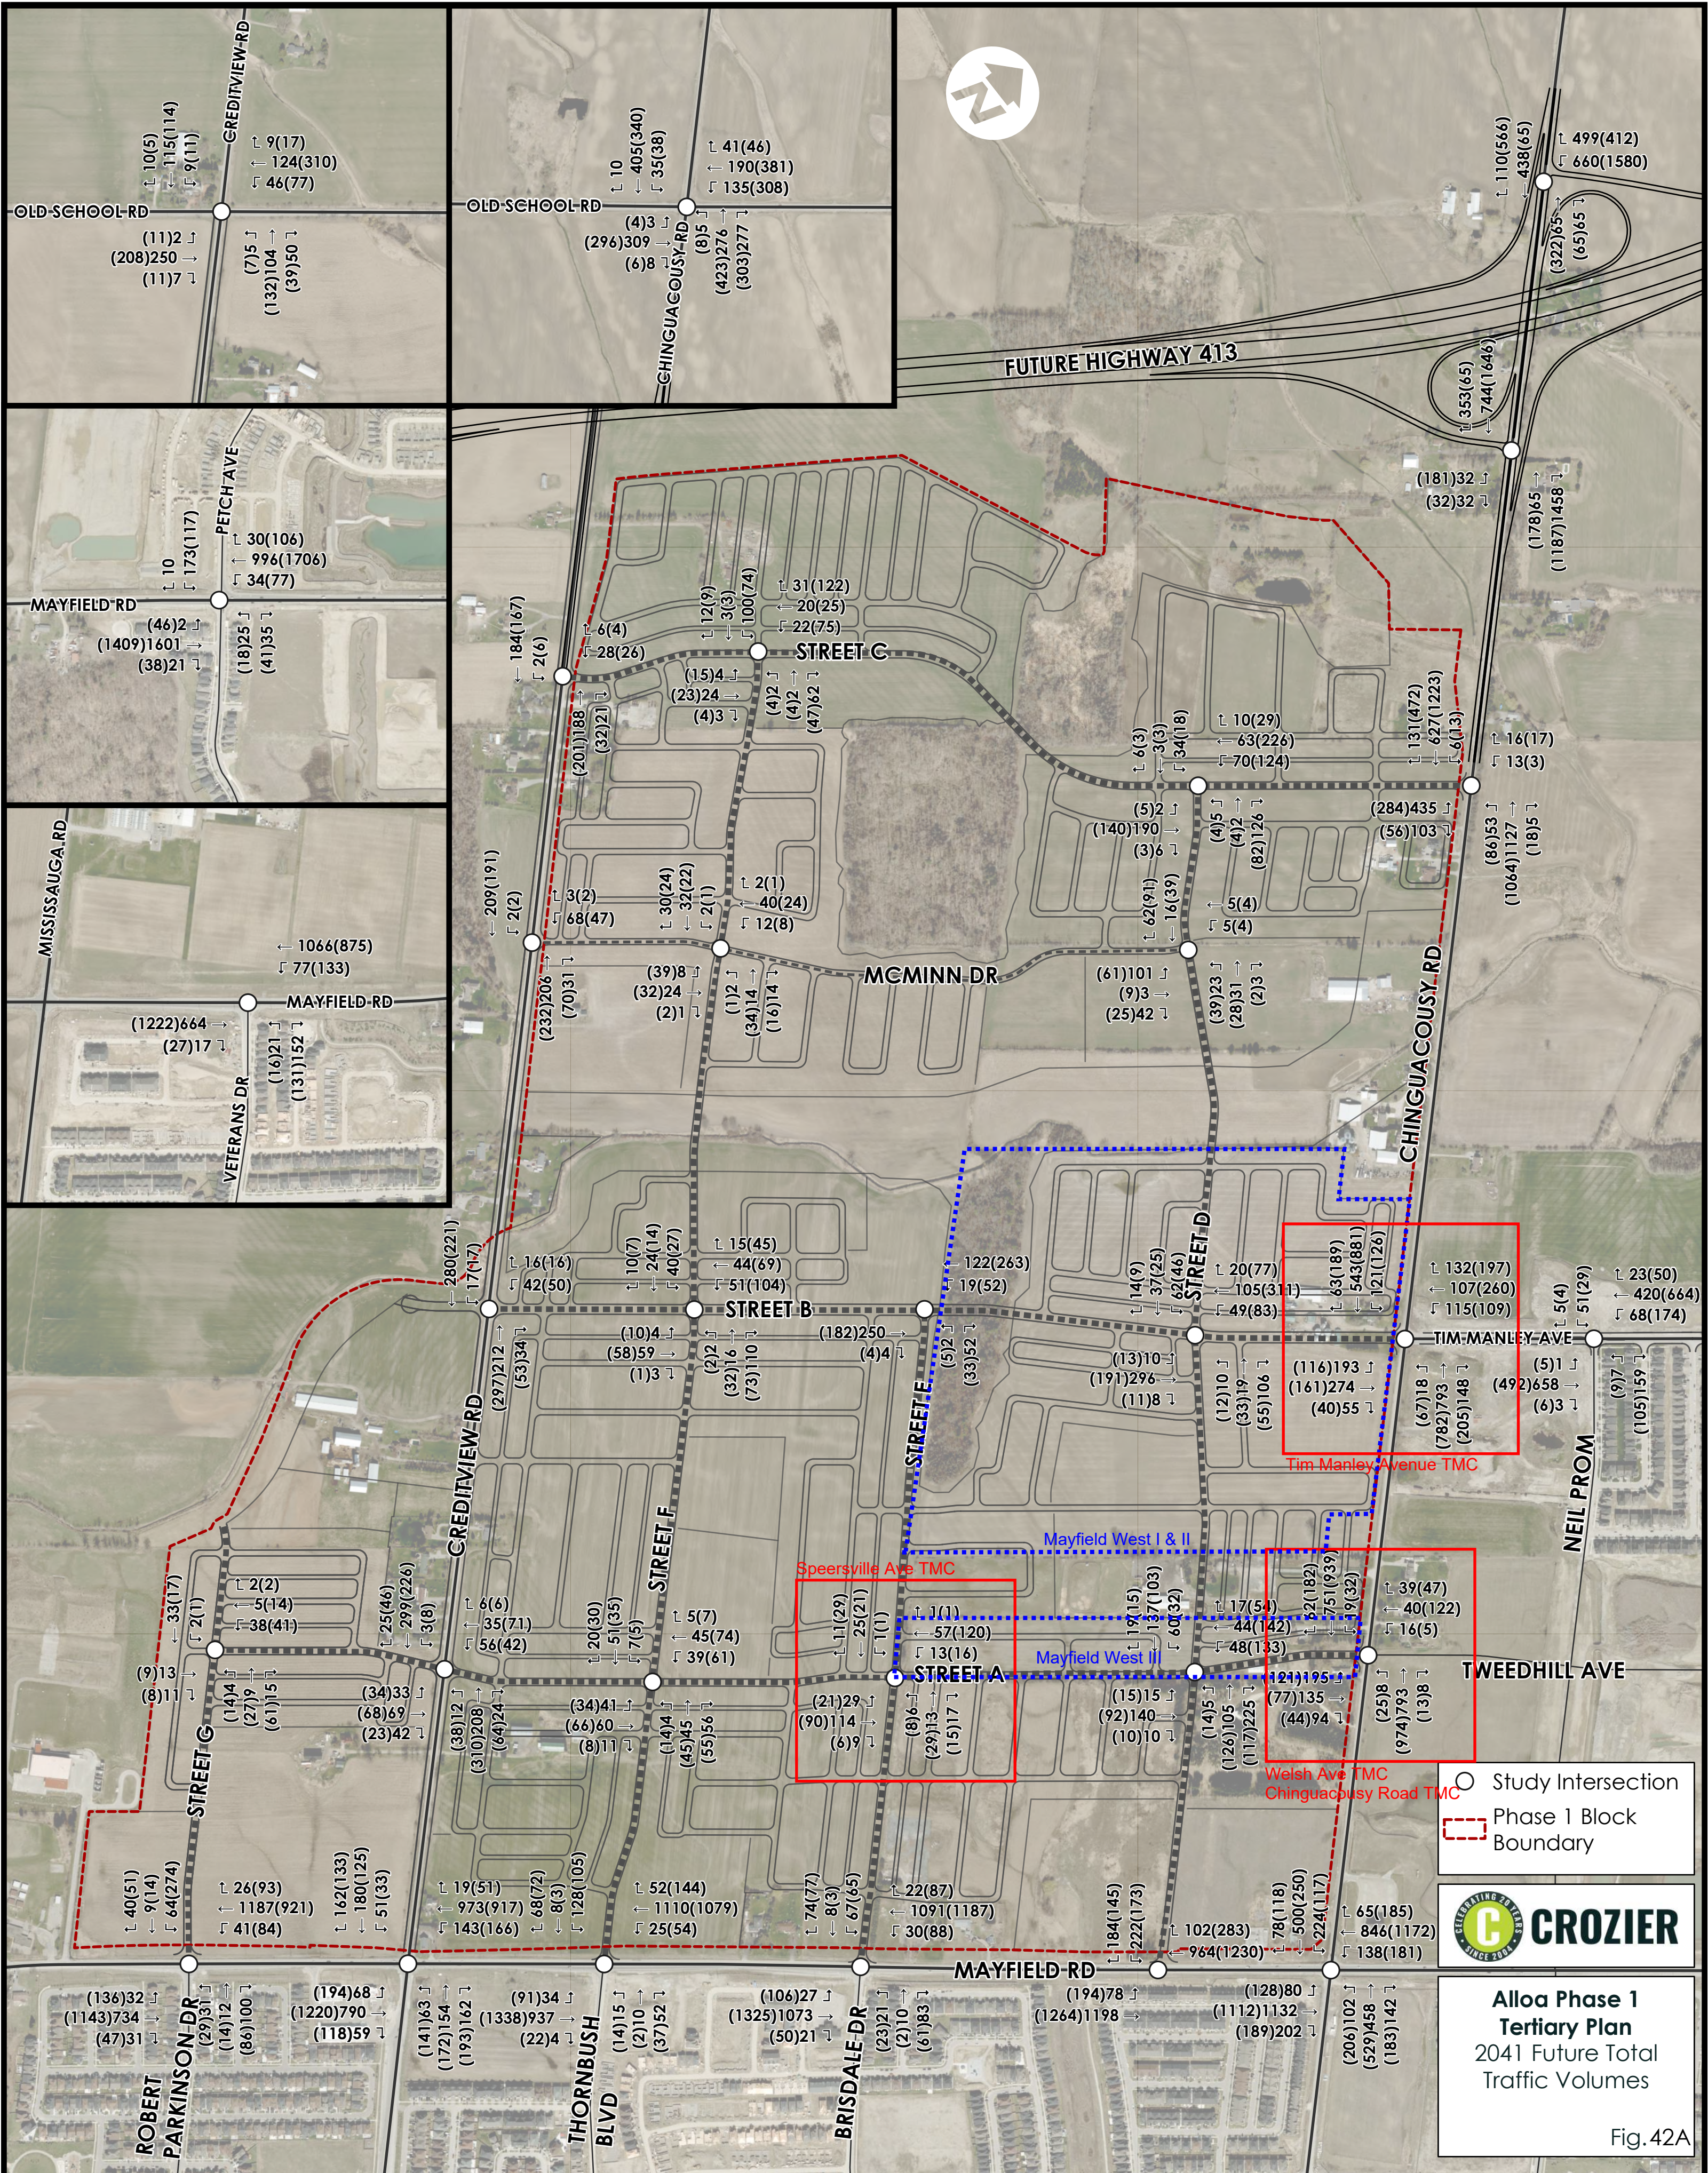


○ Study Intersection  
Phase 1 Block Boundary



**Alloo Phase 1  
Tertiary Plan**  
2041 Future Total  
Traffic Volumes

Fig. 42A



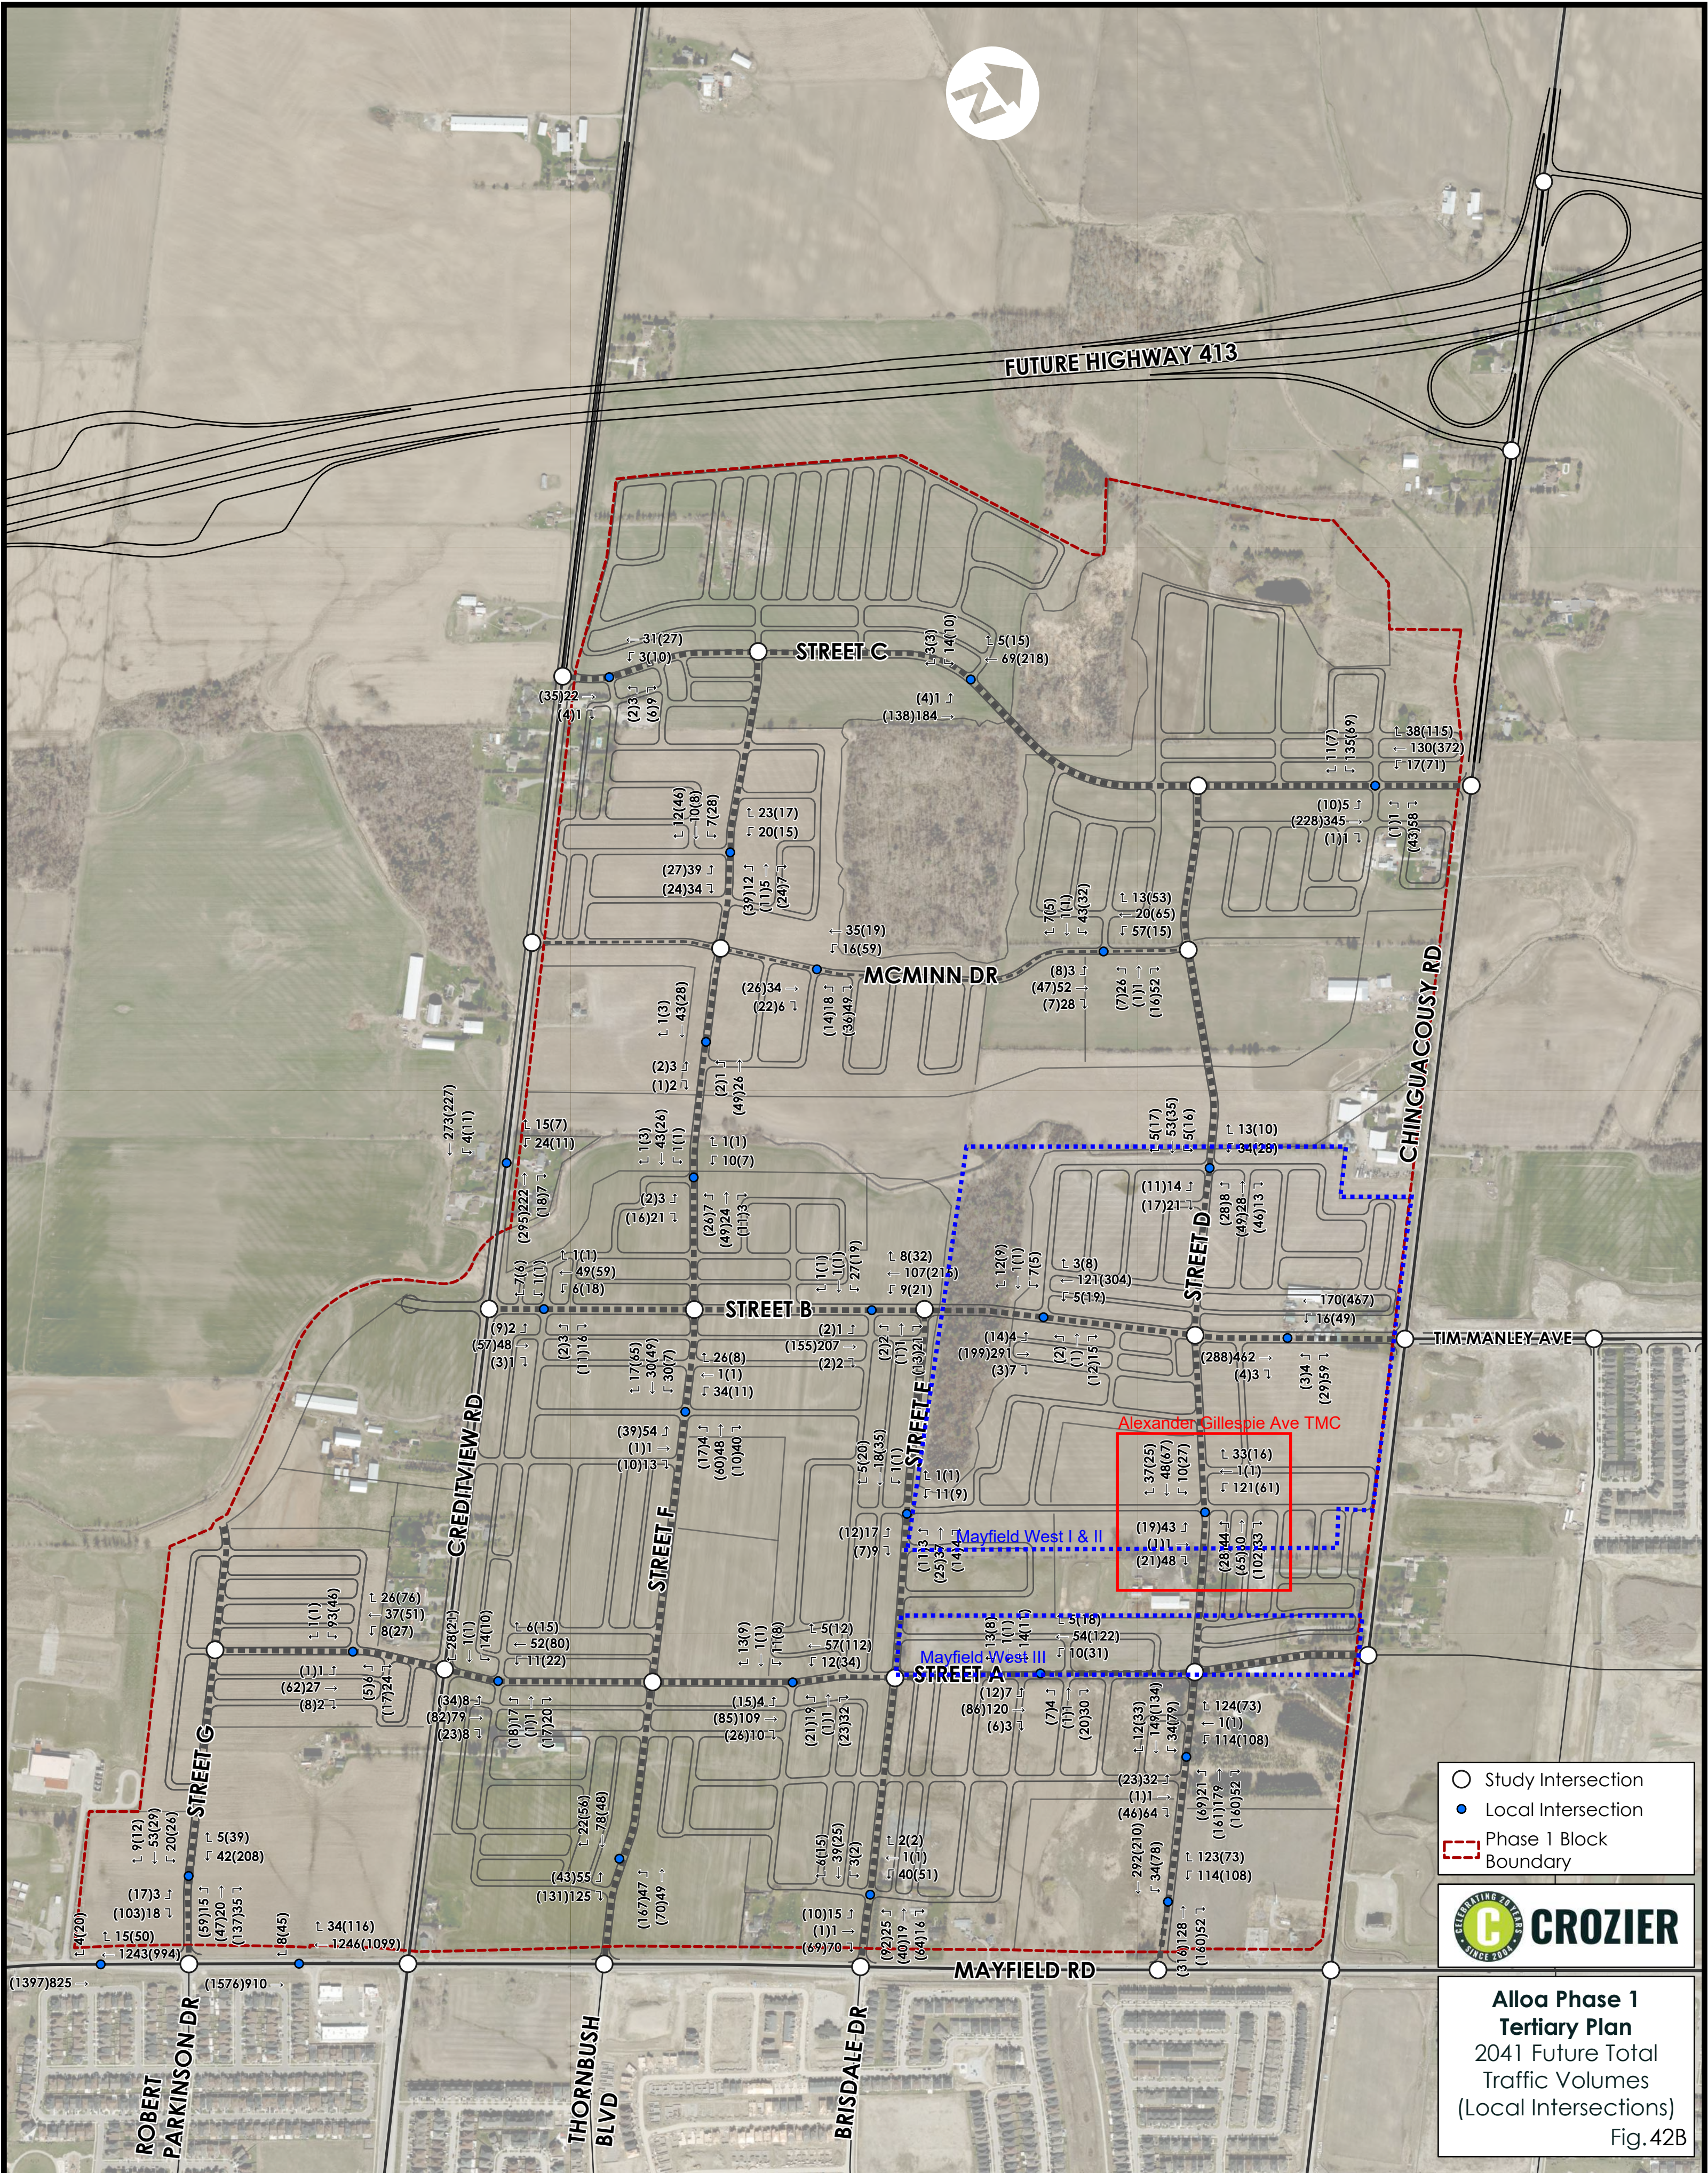

- Study Intersection
- Local Intersection
- Phase 1 Block Boundary



**Aloa Phase 1  
Tertiary Plan**  
2041 Future Total  
Traffic Volumes  
(Local Intersections)  
Fig. 42B





Turning Movement Count (6 . CHINGUACOUSY RD & TIM MANLEY AVE)

Start Time	N Approach CHINGUACOUSY RD						E Approach TIM MANLEY AVE						S Approach CHINGUACOUSY RD						W Approach WEST DRIVEWAY						Int. Total (15 min)	Int. Total (1 hr)
	Right N-W	Thru N-S	Left N-E	UTurn N:N	Peds N:	Approach Total	Right E:N	Thru E-W	Left E:S	UTurn E:E	Peds E:	Approach Total	Right S:E	Thru S:N	Left S-W	UTurn S:S	Peds S:	Approach Total	Right W:S	Thru W:E	Left W:N	UTurn W-W	Peds W:	Approach Total		
06:00:00	0	3	1	0	0	4	0	0	9	0	0	9	1	19	0	0	0	20	0	0	0	0	0	0	33	
06:15:00	0	11	0	0	0	11	1	0	4	0	0	5	4	32	0	0	0	36	0	0	0	0	0	0	52	
06:30:00	0	6	2	0	0	8	3	0	5	0	0	8	7	23	0	0	0	30	0	0	0	0	0	0	46	
06:45:00	0	15	5	0	0	20	0	0	6	0	0	6	6	24	0	0	0	30	0	0	0	0	0	0	56	187
07:00:00	0	9	2	0	0	11	2	0	14	0	0	16	15	28	0	0	0	43	0	0	0	0	0	0	70	224
07:15:00	1	20	4	0	0	25	0	0	7	0	0	7	7	27	0	0	0	34	0	0	0	0	0	0	66	238
07:30:00	0	21	2	0	0	23	0	0	11	0	0	11	8	25	0	0	0	33	0	0	0	0	0	0	67	259
07:45:00	0	47	1	0	0	48	2	0	13	0	0	15	0	34	0	0	0	34	0	0	1	0	0	1	98	301
08:00:00	0	35	1	0	0	36	0	0	12	0	0	12	14	24	1	0	0	39	0	0	0	0	0	0	87	318
08:15:00	0	31	1	0	0	32	0	0	16	0	0	16	13	32	0	0	0	45	0	0	1	0	0	1	94	346
08:30:00	0	29	6	0	0	35	2	0	20	0	0	22	12	20	0	0	0	32	0	0	0	0	0	0	89	368
08:45:00	1	17	0	0	0	18	3	0	17	0	0	20	14	22	0	0	0	36	0	0	0	0	0	0	74	344
09:00:00	0	9	2	0	0	11	2	0	8	0	0	10	17	23	0	0	0	40	0	0	1	0	0	1	62	319
09:15:00	0	14	0	0	0	14	0	0	5	0	0	5	9	18	0	0	0	27	0	0	0	0	0	0	46	271
09:30:00	0	8	0	0	0	8	5	0	9	0	0	14	6	15	0	0	0	21	0	0	0	0	0	0	43	225
09:45:00	0	9	0	0	0	9	2	0	12	0	2	14	14	25	0	0	0	39	0	0	0	0	0	0	62	213
***BREAK***																										
15:00:00	0	25	0	0	0	25	1	0	9	0	0	10	4	27	0	0	0	31	0	0	0	0	0	0	66	
15:15:00	0	25	5	0	0	30	1	0	15	0	0	16	23	40	0	0	0	63	0	0	0	0	0	0	109	
15:30:00	0	27	2	0	0	29	2	0	10	0	0	12	15	37	0	0	0	52	0	0	0	0	0	0	93	
15:45:00	0	36	5	0	0	41	1	0	13	0	0	14	26	28	0	0	0	54	0	0	0	0	0	0	109	377
16:00:00	0	31	1	0	0	32	2	0	17	0	0	19	7	35	0	0	0	42	0	0	0	0	0	0	93	404
16:15:00	0	32	0	0	0	32	0	0	13	0	0	13	3	24	0	0	0	27	0	0	0	0	0	0	72	367
16:30:00	1	35	1	0	0	37	1	0	12	0	0	13	10	35	0	0	0	45	0	0	2	0	0	2	97	371
16:45:00	0	30	2	0	0	32	3	0	14	0	0	17	14	23	0	0	0	37	0	0	1	0	0	1	87	349
17:00:00	0	47	2	0	0	49	4	0	14	0	0	18	16	30	0	0	0	46	0	0	0	0	0	0	113	369
17:15:00	0	35	1	0	0	36	1	0	14	0	0	15	12	20	0	0	0	32	0	0	0	0	0	0	83	380
17:30:00	0	50	4	0	0	54	1	0	9	0	0	10	14	27	0	0	0	41	0	0	0	0	0	0	105	388
17:45:00	0	46	0	0	0	46	1	0	7	0	0	8	17	29	0	0	0	46	0	0	0	0	0	0	100	401
18:00:00	1	33	0	0	0	34	0	0	13	0	0	13	16	24	0	0	0	40	0	0	0	0	0	0	87	375
18:15:00	0	32	2	0	0	34	0	0	7	0	0	7	17	23	0	0	0	40	1	0	0	0	0	1	82	374
18:30:00	0	25	2	0	0	27	0	0	15	0	0	15	15	24	0	0	0	39	0	0	0	0	0	0	81	350
18:45:00	0	35	0	0	0	35	1	0	13	0	0	14	13	24	0	0	0	37	0	0	0	0	0	0	86	336
Grand Total	4	828	54	0	0	886	41	0	363	0	2	404	369	841	1	0	0	1211	1	0	6	0	0	7	2508	-
Approach%	0.5%	93.5%	6.1%	0%		-	10.1%	0%	89.9%	0%		-	30.5%	69.4%	0.1%	0%		-	14.3%	0%	85.7%	0%		-	-	-
Totals %	0.2%	33%	2.2%	0%		35.3%	1.6%	0%	14.5%	0%		16.1%	14.7%	33.5%	0%	0%		48.3%	0%	0%	0.2%	0%		0.3%	-	-
Heavy	0	20	9	0		-	8	0	57	0		-	56	19	0	0		-	0	0	1	0		-	-	-
Heavy %	0%	2.4%	16.7%	0%		-	19.5%	0%	15.7%	0%		-	15.2%	2.3%	0%	0%		-	0%	0%	16.7%	0%		-	-	-
Bicycles	-	-	-	-		-	-	-	-	-		-	-	-	-	-		-	-	-	-	-		-	-	-
Bicycle %	-	-	-	-		-	-	-	-	-		-	-	-	-	-		-	-	-	-	-		-	-	-



Peak Hour: 07:45 AM - 08:45 AM Weather: Overcast Clouds (7.73 °C)


Start Time	N Approach CHINGUACOUSY RD						E Approach TIM MANLEY AVE						S Approach CHINGUACOUSY RD						W Approach WEST DRIVEWAY						Int. Total (15 min)
	Right	Thru	Left	UTurn	Peds	Approach Total	Right	Thru	Left	UTurn	Peds	Approach Total	Right	Thru	Left	UTurn	Peds	Approach Total	Right	Thru	Left	UTurn	Peds	Approach Total	
07:45:00	0	47	1	0	0	48	2	0	13	0	0	15	0	34	0	0	0	34	0	0	1	0	0	1	98
08:00:00	0	35	1	0	0	36	0	0	12	0	0	12	14	24	1	0	0	39	0	0	0	0	0	0	87
08:15:00	0	31	1	0	0	32	0	0	16	0	0	16	13	32	0	0	0	45	0	0	1	0	0	1	94
08:30:00	0	29	6	0	0	35	2	0	20	0	0	22	12	20	0	0	0	32	0	0	0	0	0	0	89
Grand Total	0	142	9	0	0	151	4	0	61	0	0	65	39	110	1	0	0	150	0	0	2	0	0	2	368
Approach%	0%	94%	6%	0%		-	6.2%	0%	93.8%	0%		-	26%	73.3%	0.7%	0%		-	0%	0%	100%	0%		-	-
Totals %	0%	38.6%	2.4%	0%		41%	1.1%	0%	16.6%	0%		17.7%	10.6%	29.9%	0.3%	0%		40.8%	0%	0%	0.5%	0%		0.5%	-
PHF	0	0.76	0.38	0		0.79	0.5	0	0.76	0		0.74	0.7	0.81	0.25	0		0.83	0	0	0.5	0		0.5	-
Heavy	0	2	3	0		5	2	0	9	0		11	15	2	0	0		17	0	0	1	0		1	-
Heavy %	0%	1.4%	33.3%	0%		3.3%	50%	0%	14.8%	0%		16.9%	38.5%	1.8%	0%	0%		11.3%	0%	0%	50%	0%		50%	-
Lights	0	140	6	0		146	2	0	52	0		54	24	108	1	0		133	0	0	1	0		1	-
Lights %	0%	98.6%	66.7%	0%		96.7%	50%	0%	85.2%	0%		83.1%	61.5%	98.2%	100%	0%		88.7%	0%	0%	50%	0%		50%	-
Single-Unit Trucks	0	0	1	0		1	1	0	7	0		8	12	0	0	0		12	0	0	1	0		1	-
Single-Unit Trucks %	0%	0%	11.1%	0%		0.7%	25%	0%	11.5%	0%		12.3%	30.8%	0%	0%	0%		8%	0%	0%	50%	0%		50%	-
Buses	0	2	2	0		4	0	0	2	0		2	3	2	0	0		5	0	0	0	0		0	-
Buses %	0%	1.4%	22.2%	0%		2.6%	0%	0%	3.3%	0%		3.1%	7.7%	1.8%	0%	0%		3.3%	0%	0%	0%	0%		0%	-
Articulated Trucks	0	0	0	0		0	1	0	0	0		1	0	0	0	0		0	0	0	0	0		0	-
Articulated Trucks %	0%	0%	0%	0%		0%	25%	0%	0%	0%		1.5%	0%	0%	0%	0%		0%	0%	0%	0%	0%		0%	-
Bicycles on Road	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	-
Bicycles on Road %	0%	0%	0%	0%		0%	0%	0%	0%	0%		0%	0%	0%	0%	0%		0%	0%	0%	0%	0%		0%	-
Pedestrians	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-
Pedestrians%	-	-	-	-	0%	-	-	-	-	-	0%	-	-	-	-	-	0%	-	-	-	-	-	0%	-	-




Peak Hour: 03:15 PM - 04:15 PM Weather: Overcast Clouds (14.32 °C)

Start Time	N Approach CHINGUACOUSY RD						E Approach TIM MANLEY AVE						S Approach CHINGUACOUSY RD						W Approach WEST DRIVEWAY						Int. Total (15 min)
	Right	Thru	Left	UTurn	Peds	Approach Total	Right	Thru	Left	UTurn	Peds	Approach Total	Right	Thru	Left	UTurn	Peds	Approach Total	Right	Thru	Left	UTurn	Peds	Approach Total	
15:15:00	0	25	5	0	0	30	1	0	15	0	0	16	23	40	0	0	0	63	0	0	0	0	0	0	109
15:30:00	0	27	2	0	0	29	2	0	10	0	0	12	15	37	0	0	0	52	0	0	0	0	0	0	93
15:45:00	0	36	5	0	0	41	1	0	13	0	0	14	26	28	0	0	0	54	0	0	0	0	0	0	109
16:00:00	0	31	1	0	0	32	2	0	17	0	0	19	7	35	0	0	0	42	0	0	0	0	0	0	93
Grand Total	0	119	13	0	0	132	6	0	55	0	0	61	71	140	0	0	0	211	0	0	0	0	0	0	404
Approach%	0%	90.2%	9.8%	0%		-	9.8%	0%	90.2%	0%		-	33.6%	66.4%	0%	0%		-	0%	0%	0%	0%		-	-
Totals %	0%	29.5%	3.2%	0%		32.7%	1.5%	0%	13.6%	0%		15.1%	17.6%	34.7%	0%	0%		52.2%	0%	0%	0%	0%		0%	-
PHF	0	0.83	0.65	0		0.8	0.75	0	0.81	0		0.8	0.68	0.88	0	0		0.84	0	0	0	0		0	-
Heavy	0	7	2	0		9	0	0	17	0		17	18	6	0	0		24	0	0	0	0		0	-
Heavy %	0%	5.9%	15.4%	0%		6.8%	0%	0%	30.9%	0%		27.9%	25.4%	4.3%	0%	0%		11.4%	0%	0%	0%	0%		0%	-
Lights	0	112	11	0		123	6	0	38	0		44	53	134	0	0		187	0	0	0	0		0	-
Lights %	0%	94.1%	84.6%	0%		93.2%	100%	0%	69.1%	0%		72.1%	74.6%	95.7%	0%	0%		88.6%	0%	0%	0%	0%		0%	-
Single-Unit Trucks	0	0	0	0		0	0	0	12	0		12	13	0	0	0		13	0	0	0	0		0	-
Single-Unit Trucks %	0%	0%	0%	0%		0%	0%	0%	21.8%	0%		19.7%	18.3%	0%	0%	0%		6.2%	0%	0%	0%	0%		0%	-
Buses	0	7	2	0		9	0	0	5	0		5	5	5	0	0		10	0	0	0	0		0	-
Buses %	0%	5.9%	15.4%	0%		6.8%	0%	0%	9.1%	0%		8.2%	7%	3.6%	0%	0%		4.7%	0%	0%	0%	0%		0%	-
Articulated Trucks	0	0	0	0		0	0	0	0	0		0	0	1	0	0		1	0	0	0	0		0	-
Articulated Trucks %	0%	0%	0%	0%		0%	0%	0%	0%	0%		0%	0%	0.7%	0%	0%		0.5%	0%	0%	0%	0%		0%	-
Bicycles on Road	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	-
Bicycles on Road %	0%	0%	0%	0%		0%	0%	0%	0%	0%		0%	0%	0%	0%	0%		0%	0%	0%	0%	0%		0%	-
Pedestrians	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-
Pedestrians%	-	-	-	-	0%	-	-	-	-	-	0%	-	-	-	-	-	0%	-	-	-	-	-	0%	-	-

**Peak Hour: 07:45 AM - 08:45 AM    Weather: Overcast Clouds (7.73 °C)**

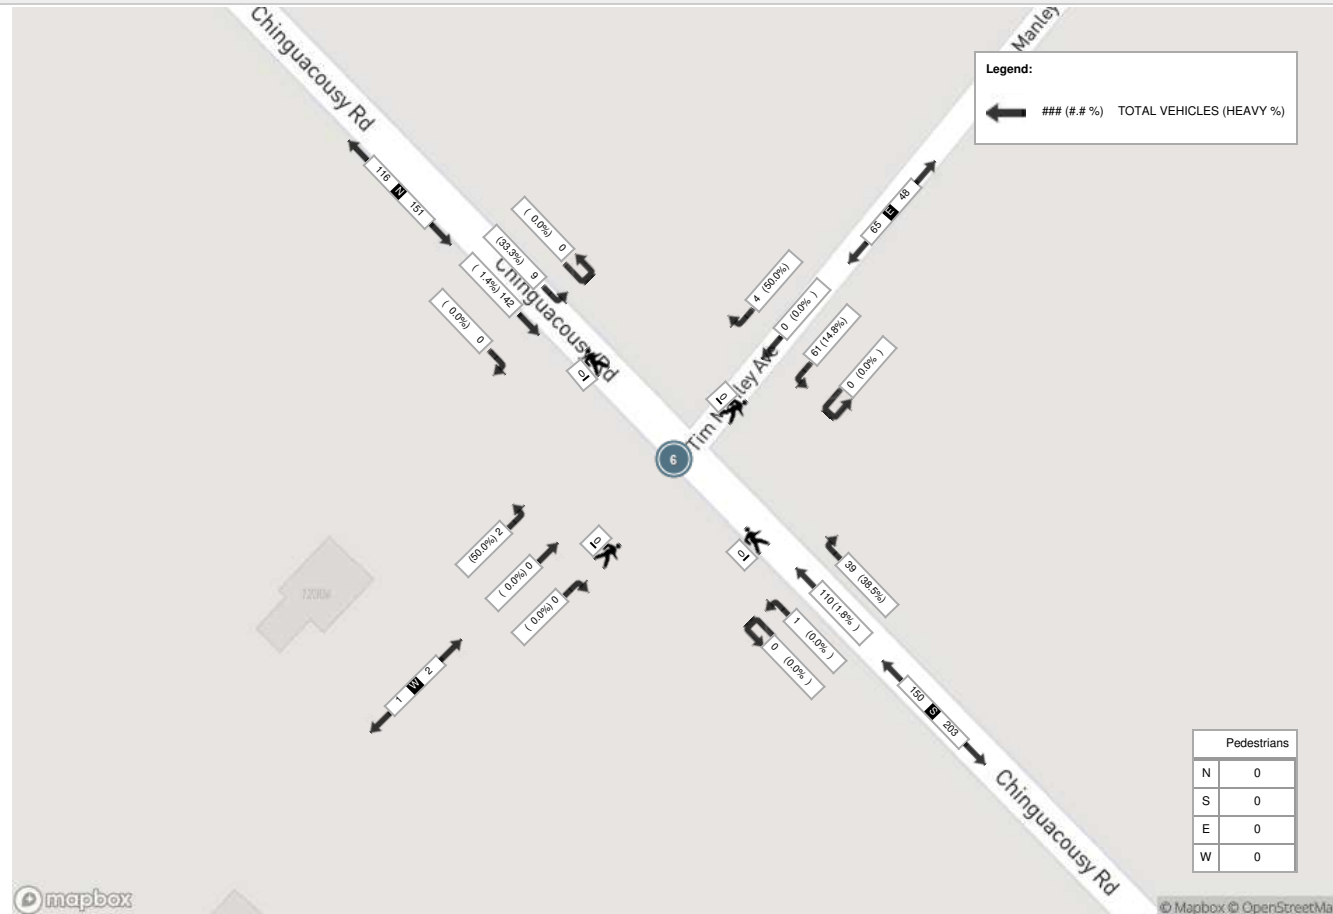

**Peak Hour: 03:15 PM - 04:15 PM    Weather: Overcast Clouds (14.32 °C)**

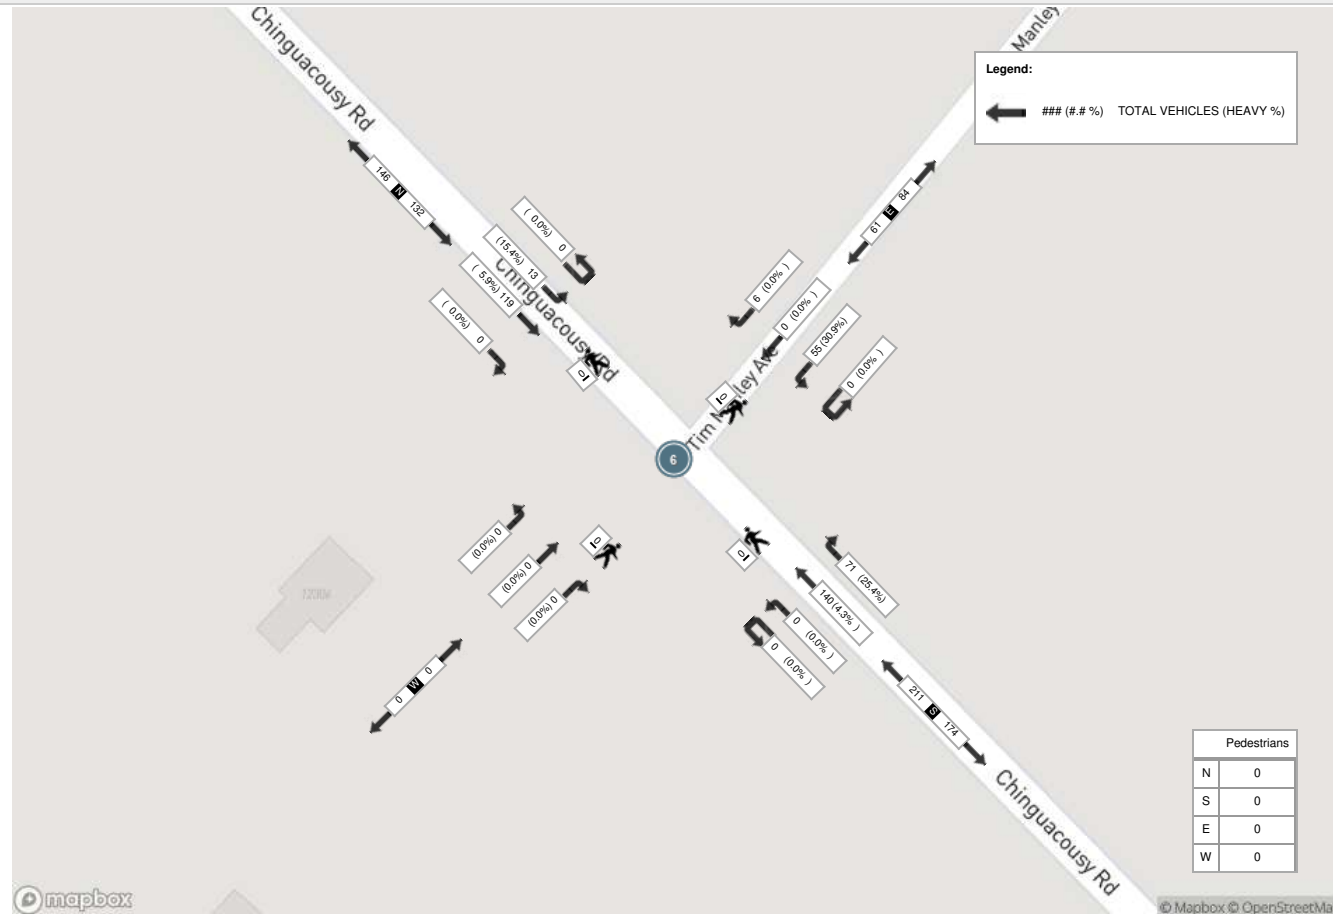



Turning Movement Count (7 . MAYFIELD RD & BRISDALE DR) CustID: 01420005

Start Time	E Approach MAYFIELD RD					S Approach BRISDALE DR					W Approach MAYFIELD RD					Int. Total (15 min)	Int. Total (1 hr)
	Thru E:W	Left E:S	UTurn E:E	Peds E:	Approach Total	Right S:E	Left S:W	UTurn S:S	Peds S:	Approach Total	Right W:S	Thru W:E	UTurn W:W	Peds W:	Approach Total		
06:00:00	85	2	0	0	87	17	1	0	0	18	0	92	0	0	92	197	
06:15:00	80	2	0	0	82	13	3	0	0	16	1	94	0	0	95	193	
06:30:00	151	3	0	0	154	20	4	0	0	24	0	99	0	0	99	277	
06:45:00	106	4	0	0	110	20	1	0	0	21	0	105	0	0	105	236	903
07:00:00	122	5	0	0	127	18	8	0	0	26	4	138	0	0	142	295	1001
07:15:00	119	5	0	0	124	22	7	0	0	29	3	153	0	0	156	309	1117
07:30:00	139	8	0	0	147	19	4	0	0	23	0	149	0	0	149	319	1159
07:45:00	147	12	0	0	159	15	4	0	0	19	2	135	0	0	137	315	1238
08:00:00	147	8	0	0	155	19	3	0	0	22	6	160	0	0	166	343	1286
08:15:00	160	9	0	0	169	24	4	0	0	28	5	193	0	0	198	395	1372
08:30:00	146	5	0	0	151	14	3	0	0	17	4	150	0	0	154	322	1375
08:45:00	182	4	0	0	186	18	4	0	0	22	5	125	0	0	130	338	1398
09:00:00	154	8	1	0	163	14	5	0	0	19	5	158	0	0	163	345	1400
09:15:00	103	11	0	0	114	16	6	0	0	22	5	143	0	0	148	284	1289
09:30:00	115	7	0	0	122	20	3	0	0	23	8	112	0	0	120	265	1232
09:45:00	100	2	0	0	102	18	5	0	0	23	2	124	0	0	126	251	1145
***BREAK***																	
15:00:00	150	16	0	0	166	12	5	0	0	17	11	175	0	0	186	369	
15:15:00	159	22	0	0	181	16	5	0	0	21	10	159	0	0	169	371	
15:30:00	148	9	0	0	157	17	3	0	0	20	9	194	0	0	203	380	
15:45:00	157	20	0	0	177	6	3	0	0	9	8	194	0	0	202	388	1508
16:00:00	139	22	0	0	161	16	4	0	0	20	5	159	0	0	164	345	1484
16:15:00	150	15	0	0	165	13	4	0	0	17	5	154	0	0	159	341	1454
16:30:00	138	13	0	0	151	5	3	0	0	8	7	160	0	0	167	326	1400
16:45:00	123	23	0	0	146	16	6	0	0	22	11	158	0	0	169	337	1349
17:00:00	133	17	0	0	150	16	5	0	0	21	4	168	0	0	172	343	1347
17:15:00	145	13	0	0	158	10	5	1	0	16	7	167	0	0	174	348	1354
17:30:00	145	13	0	0	158	16	3	0	0	19	7	195	0	0	202	379	1407
17:45:00	137	19	0	1	156	10	5	0	0	15	14	150	0	0	164	335	1405
18:00:00	153	15	0	0	168	12	1	0	0	13	14	169	0	0	183	364	1426
18:15:00	165	19	0	0	184	12	5	0	0	17	7	181	0	0	188	389	1467
18:30:00	113	23	0	0	136	7	3	0	1	10	5	145	0	0	150	296	1384
18:45:00	122	20	0	0	142	10	3	0	0	13	9	146	0	0	155	310	1359



Grand Total	4333	374	1	1	4708	481	128	1	1	610	183	4804	0	0	4987	10305	-
Approach%	92%	7.9%	0%		-	78.9%	21%	0.2%		-	3.7%	96.3%	0%		-	-	-
Totals %	42%	3.6%	0%		45.7%	4.7%	1.2%	0%		5.9%	1.8%	46.6%	0%		48.4%	-	-
Heavy	291	9	0		-	16	11	0		-	9	296	0		-	-	-
Heavy %	6.7%	2.4%	0%		-	3.3%	8.6%	0%		-	4.9%	6.2%	0%		-	-	-
Bicycles	-	-	-		-	-	-	-		-	-	-	-		-	-	-
Bicycle %	-	-	-		-	-	-	-		-	-	-	-		-	-	-





Peak Hour: 08:15 AM - 09:15 AM Weather: Overcast Clouds (7.73 °C)


Start Time	E Approach MAYFIELD RD					S Approach BRISDALE DR					W Approach MAYFIELD RD					Int. Total (15 min)
	Thru	Left	UTurn	Peds	Approach Total	Right	Left	UTurn	Peds	Approach Total	Right	Thru	UTurn	Peds	Approach Total	
08:15:00	160	9	0	0	169	24	4	0	0	28	5	193	0	0	198	395
08:30:00	146	5	0	0	151	14	3	0	0	17	4	150	0	0	154	322
08:45:00	182	4	0	0	186	18	4	0	0	22	5	125	0	0	130	338
09:00:00	154	8	1	0	163	14	5	0	0	19	5	158	0	0	163	345
Grand Total	642	26	1	0	669	70	16	0	0	86	19	626	0	0	645	1400
Approach%	96%	3.9%	0.1%		-	81.4%	18.6%	0%		-	2.9%	97.1%	0%		-	-
Totals %	45.9%	1.9%	0.1%		47.8%	5%	1.1%	0%		6.1%	1.4%	44.7%	0%		46.1%	-
PHF	0.88	0.72	0.25		0.9	0.73	0.8	0		0.77	0.95	0.81	0		0.81	-
Heavy	74	1	0		75	5	1	0		6	3	60	0		63	-
Heavy %	11.5%	3.8%	0%		11.2%	7.1%	6.3%	0%		7%	15.8%	9.6%	0%		9.8%	-
Lights	568	25	1		594	65	15	0		80	16	566	0		582	-
Lights %	88.5%	96.2%	100%		88.8%	92.9%	93.8%	0%		93%	84.2%	90.4%	0%		90.2%	-
Single-Unit Trucks	30	1	0		31	1	1	0		2	0	18	0		18	-
Single-Unit Trucks %	4.7%	3.8%	0%		4.6%	1.4%	6.3%	0%		2.3%	0%	2.9%	0%		2.8%	-
Buses	33	0	0		33	4	0	0		4	3	39	0		42	-
Buses %	5.1%	0%	0%		4.9%	5.7%	0%	0%		4.7%	15.8%	6.2%	0%		6.5%	-
Articulated Trucks	11	0	0		11	0	0	0		0	0	3	0		3	-
Articulated Trucks %	1.7%	0%	0%		1.6%	0%	0%	0%		0%	0%	0.5%	0%		0.5%	-
Pedestrians	-	-	-	0	-	-	-	-	0	-	-	-	-	0	-	-
Pedestrians%	-	-	-	0%	-	-	-	-	0%	-	-	-	-	0%	-	-




Peak Hour: 03:00 PM - 04:00 PM Weather: Overcast Clouds (14.32 °C)

Start Time	E Approach MAYFIELD RD					S Approach BRISDALE DR					W Approach MAYFIELD RD					Int. Total (15 min)
	Thru	Left	UTurn	Peds	Approach Total	Right	Left	UTurn	Peds	Approach Total	Right	Thru	UTurn	Peds	Approach Total	
15:00:00	150	16	0	0	166	12	5	0	0	17	11	175	0	0	186	369
15:15:00	159	22	0	0	181	16	5	0	0	21	10	159	0	0	169	371
15:30:00	148	9	0	0	157	17	3	0	0	20	9	194	0	0	203	380
15:45:00	157	20	0	0	177	6	3	0	0	9	8	194	0	0	202	388
Grand Total	614	67	0	0	681	51	16	0	0	67	38	722	0	0	760	1508
Approach%	90.2%	9.8%	0%		-	76.1%	23.9%	0%		-	5%	95%	0%		-	-
Totals %	40.7%	4.4%	0%		45.2%	3.4%	1.1%	0%		4.4%	2.5%	47.9%	0%		50.4%	-
PHF	0.97	0.76	0		0.94	0.75	0.8	0		0.8	0.86	0.93	0		0.94	-
Heavy	39	0	0		39	2	4	0		6	3	83	0		86	-
Heavy %	6.4%	0%	0%		5.7%	3.9%	25%	0%		9%	7.9%	11.5%	0%		11.3%	-
Lights	575	67	0		642	49	12	0		61	35	639	0		674	-
Lights %	93.6%	100%	0%		94.3%	96.1%	75%	0%		91%	92.1%	88.5%	0%		88.7%	-
Single-Unit Trucks	17	0	0		17	0	0	0		0	0	29	0		29	-
Single-Unit Trucks %	2.8%	0%	0%		2.5%	0%	0%	0%		0%	0%	4%	0%		3.8%	-
Buses	17	0	0		17	2	4	0		6	3	41	0		44	-
Buses %	2.8%	0%	0%		2.5%	3.9%	25%	0%		9%	7.9%	5.7%	0%		5.8%	-
Articulated Trucks	5	0	0		5	0	0	0		0	0	13	0		13	-
Articulated Trucks %	0.8%	0%	0%		0.7%	0%	0%	0%		0%	0%	1.8%	0%		1.7%	-
Pedestrians	-	-	-	0	-	-	-	-	0	-	-	-	-	0	-	-
Pedestrians%	-	-	-	0%	-	-	-	-	0%	-	-	-	-	0%	-	-

**Peak Hour: 08:15 AM - 09:15 AM    Weather: Overcast Clouds (7.73 °C)**

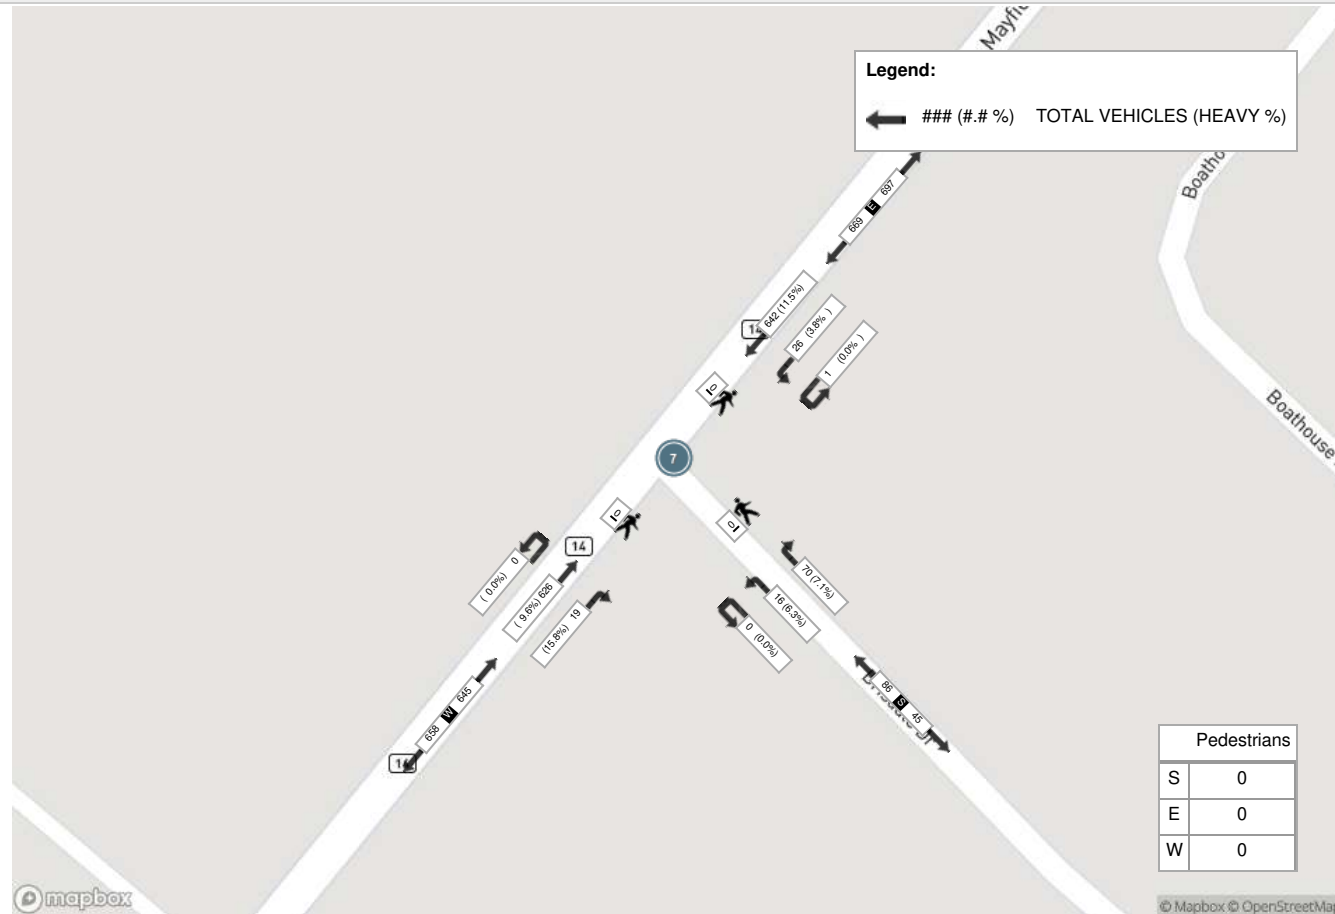

**Peak Hour: 03:00 PM - 04:00 PM    Weather: Overcast Clouds (14.32 °C)**

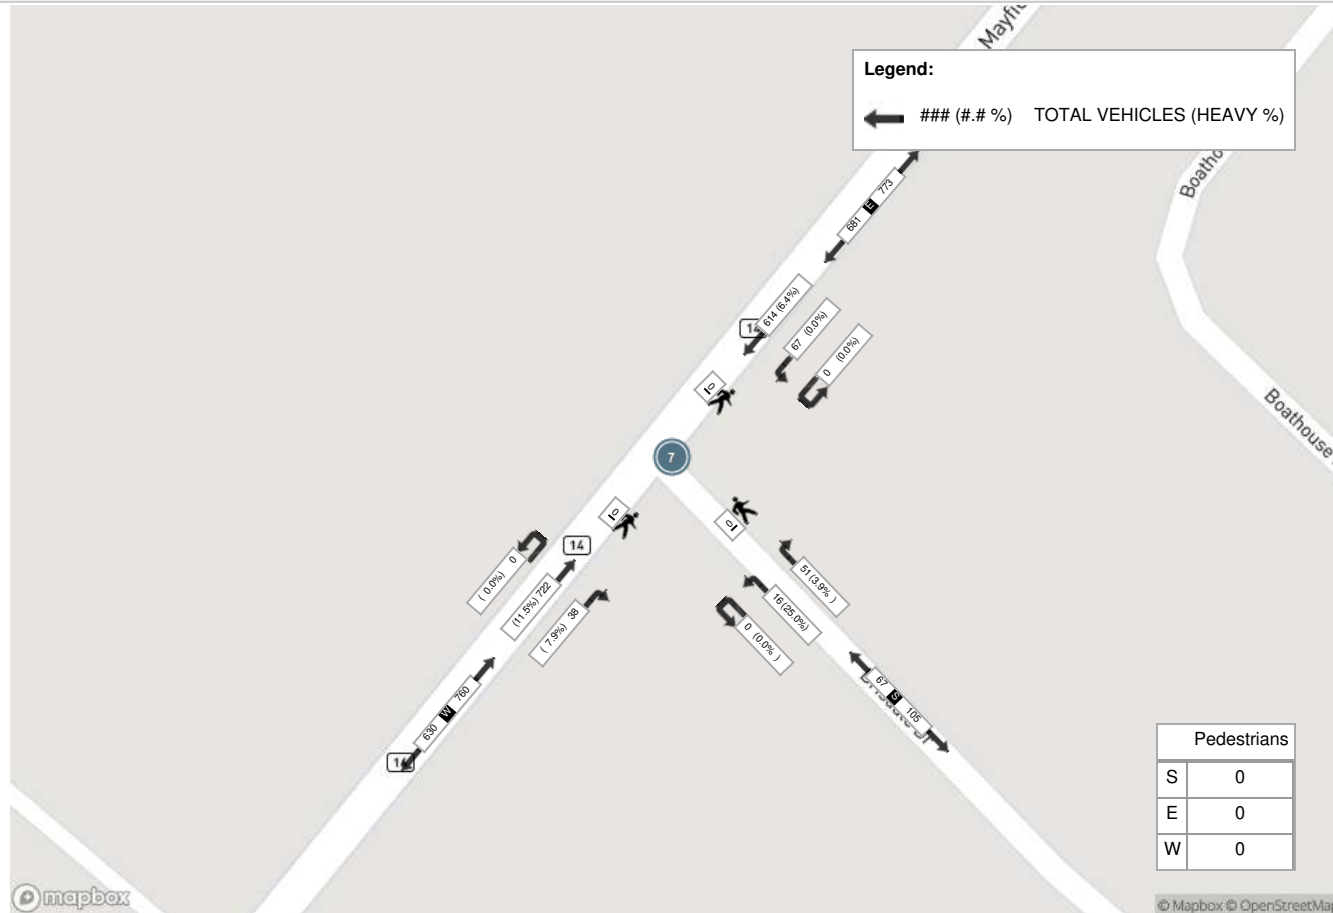



Turning Movement Count (5 . MAYFIELD RD & CHINGUACOUSY RD) CustID: 01419287

Start Time	N Approach CHINGUACOUSY RD						E Approach MAYFIELD RD						S Approach CHINGUACOUSY RD						W Approach MAYFIELD RD						Int. Total (15 min)	Int. Total (1 hr)	
	Right N-W	Thru N-S	Left N-E	UTurn N-N	Peds N:	Approach Total	Right E-N	Thru E-W	Left E-S	UTurn E-E	Peds E:	Approach Total	Right S-E	Thru S-N	Left S-W	UTurn S-S	Peds S:	Approach Total	Right W-S	Thru W-E	Left W-N	UTurn W-W	Peds W:	Approach Total			
06:00:00	4	9	0	0	0	13	1	78	12	0	0	91	27	12	5	0	0	44	2	100	6	0	0	108	256		
06:15:00	4	11	1	0	0	16	3	77	17	0	0	97	25	27	1	0	0	53	5	95	6	0	0	106	272		
06:30:00	3	6	1	0	0	10	1	139	15	0	0	155	22	26	11	0	0	59	3	117	6	0	0	126	350		
06:45:00	6	13	0	0	0	19	5	101	10	0	0	116	23	19	5	0	0	47	4	109	4	0	0	117	299	1177	
07:00:00	16	12	1	0	0	29	7	112	17	0	0	136	28	26	5	0	0	59	8	128	12	0	0	148	372	1293	
07:15:00	5	17	3	0	0	25	2	111	17	0	0	130	33	26	8	0	0	67	10	177	3	0	0	190	412	1433	
07:30:00	5	24	3	0	0	32	4	132	26	0	0	162	24	30	8	0	0	62	11	151	5	0	0	167	423	1506	
07:45:00	8	44	2	0	0	54	2	143	29	0	0	174	27	24	9	0	0	60	11	160	6	0	0	177	465	1672	
08:00:00	8	43	1	0	0	52	2	136	30	0	0	168	26	29	12	0	0	67	15	154	11	0	0	180	467	1767	
08:15:00	13	33	3	0	0	49	4	145	14	0	0	163	31	26	8	0	0	65	12	167	12	0	0	191	468	1823	
08:30:00	7	39	5	0	0	51	3	141	18	0	0	162	29	19	6	0	0	54	18	158	7	0	0	183	450	1850	
08:45:00	13	21	4	0	0	38	4	148	31	0	0	183	32	22	22	0	0	76	5	121	14	0	0	140	437	1822	
09:00:00	7	9	1	0	0	17	3	135	27	0	0	165	25	22	22	0	0	69	17	147	13	0	0	177	428	1783	
09:15:00	6	12	1	0	0	19	2	98	29	0	1	129	28	20	10	0	0	58	13	139	7	0	0	159	365	1680	
09:30:00	6	6	1	0	0	13	0	110	24	0	0	134	27	11	6	0	0	44	3	121	7	0	0	131	322	1552	
09:45:00	8	13	2	0	0	23	5	89	31	0	0	125	23	17	3	0	0	43	2	130	14	0	0	146	337	1452	
***BREAK***																											
15:00:00	7	24	3	0	0	34	5	154	26	0	0	185	36	23	10	0	1	69	9	160	5	0	0	174	462		
15:15:00	14	23	4	0	0	41	5	154	35	0	0	194	33	47	13	0	3	93	16	170	10	0	0	196	524		
15:30:00	8	30	3	0	0	41	3	140	28	0	0	171	31	34	8	0	0	73	10	162	16	0	0	188	473		
15:45:00	14	28	2	0	0	44	6	153	32	0	0	191	24	32	10	0	0	66	15	174	17	0	0	206	507	1966	
16:00:00	12	36	2	0	0	50	9	141	34	0	0	184	21	24	7	0	0	52	11	162	9	0	0	182	468	1972	
16:15:00	9	38	1	0	0	48	2	140	40	0	0	182	22	23	17	0	0	62	11	160	3	0	0	174	466	1914	
16:30:00	9	34	0	0	0	43	5	139	40	0	0	184	34	33	4	0	0	71	9	144	7	0	0	160	458	1899	
16:45:00	9	32	4	0	0	45	3	131	48	0	0	182	26	26	4	0	0	56	12	163	7	0	0	182	465	1857	
17:00:00	11	42	6	0	0	59	3	135	35	0	0	173	26	33	8	0	0	67	5	163	10	0	0	178	477	1866	
17:15:00	11	39	2	0	0	52	2	129	29	0	1	160	24	22	17	0	0	63	8	166	10	0	0	184	459	1859	
17:30:00	8	46	3	0	0	57	2	139	33	0	0	174	29	27	12	0	0	68	12	173	14	0	0	199	498	1899	
17:45:00	8	45	3	0	0	56	2	139	41	0	0	182	35	36	11	0	0	82	17	143	7	0	0	167	487	1921	
18:00:00	9	32	3	0	0	44	1	148	40	0	0	189	28	28	9	0	0	65	17	142	12	0	0	171	469	1913	
18:15:00	5	30	2	0	1	37	2	174	42	0	0	218	34	22	6	0	0	62	10	173	13	0	0	196	513	1967	
18:30:00	7	34	4	0	0	45	1	122	49	0	1	172	44	32	8	0	1	84	10	139	7	0	0	156	457	1926	
18:45:00	8	33	1	0	0	42	6	127	30	0	0	163	38	29	6	0	0	73	13	141	5	0	0	159	437	1876	
Grand Total	268	858	72	0	1	1198	105	4160	929	0	3	5194	915	827	291	0	5	2033	324	4709	285	0	0	5318	13743	-	
Approach%	22.4%	71.6%	6%	0%		-	2%	80.1%	17.9%	0%		-	45%	40.7%	14.3%	0%		-	6.1%	88.5%	5.4%	0%		-	-	-	
Totals %	2%	6.2%	0.5%	0%		8.7%	0.8%	30.3%	6.8%	0%		37.8%	6.7%	6%	2.1%	0%		14.8%	2.4%	34.3%	2.1%	0%		38.7%	-	-	
Heavy	47	22	6	0		-	14	228	43	0		-	29	14	22	0		-	17	250	47	0		-	-	-	
Heavy %	17.5%	2.6%	8.3%	0%		-	13.3%	5.5%	4.6%	0%		-	3.2%	1.7%	7.6%	0%		-	5.2%	5.3%	16.5%	0%		-	-	-	
Bicycles	-	-	-	-		-	-	-	-	-		-	-	-	-	-		-	-	-	-	-		-	-	-	
Bicycle %	-	-	-	-		-	-	-	-	-		-	-	-	-	-		-	-	-	-	-		-	-	-	



Peak Hour: 07:45 AM - 08:45 AM Weather: Overcast Clouds (7.73 °C)


Start Time	N Approach CHINGUACOUSY RD						E Approach MAYFIELD RD						S Approach CHINGUACOUSY RD						W Approach MAYFIELD RD						Int. Total (15 min)
	Right	Thru	Left	UTurn	Peds	Approach Total	Right	Thru	Left	UTurn	Peds	Approach Total	Right	Thru	Left	UTurn	Peds	Approach Total	Right	Thru	Left	UTurn	Peds	Approach Total	
07:45:00	8	44	2	0	0	54	2	143	29	0	0	174	27	24	9	0	0	60	11	160	6	0	0	177	465
08:00:00	8	43	1	0	0	52	2	136	30	0	0	168	26	29	12	0	0	67	15	154	11	0	0	180	467
08:15:00	13	33	3	0	0	49	4	145	14	0	0	163	31	26	8	0	0	65	12	167	12	0	0	191	468
08:30:00	7	39	5	0	0	51	3	141	18	0	0	162	29	19	6	0	0	54	18	158	7	0	0	183	450
Grand Total	36	159	11	0	0	206	11	565	91	0	0	667	113	98	35	0	0	246	56	639	36	0	0	731	1850
Approach%	17.5%	77.2%	5.3%	0%		-	1.6%	84.7%	13.6%	0%		-	45.9%	39.8%	14.2%	0%		-	7.7%	87.4%	4.9%	0%		-	-
Totals %	1.9%	8.6%	0.6%	0%		11.1%	0.6%	30.5%	4.9%	0%		36.1%	6.1%	5.3%	1.9%	0%		13.3%	3%	34.5%	1.9%	0%		39.5%	-
PHF	0.69	0.9	0.55	0		0.95	0.69	0.97	0.76	0		0.96	0.91	0.84	0.73	0		0.92	0.78	0.96	0.75	0		0.96	-
Heavy	6	4	1	0		11	3	37	6	0		46	8	3	2	0		13	4	34	11	0		49	-
Heavy %	16.7%	2.5%	9.1%	0%		5.3%	27.3%	6.5%	6.6%	0%		6.9%	7.1%	3.1%	5.7%	0%		5.3%	7.1%	5.3%	30.6%	0%		6.7%	-
Lights	30	155	10	0		195	8	528	85	0		621	105	95	33	0		233	52	605	25	0		682	-
Lights %	83.3%	97.5%	90.9%	0%		94.7%	72.7%	93.5%	93.4%	0%		93.1%	92.9%	96.9%	94.3%	0%		94.7%	92.9%	94.7%	69.4%	0%		93.3%	-
Single-Unit Trucks	6	1	0	0		7	1	15	1	0		17	3	0	0	0		3	1	19	11	0		31	-
Single-Unit Trucks %	16.7%	0.6%	0%	0%		3.4%	9.1%	2.7%	1.1%	0%		2.5%	2.7%	0%	0%	0%		1.2%	1.8%	3%	30.6%	0%		4.2%	-
Buses	0	3	1	0		4	2	12	4	0		18	4	3	2	0		9	3	11	0	0		14	-
Buses %	0%	1.9%	9.1%	0%		1.9%	18.2%	2.1%	4.4%	0%		2.7%	3.5%	3.1%	5.7%	0%		3.7%	5.4%	1.7%	0%	0%		1.9%	-
Articulated Trucks	0	0	0	0		0	0	10	1	0		11	1	0	0	0		1	0	4	0	0		4	-
Articulated Trucks %	0%	0%	0%	0%		0%	0%	1.8%	1.1%	0%		1.6%	0.9%	0%	0%	0%		0.4%	0%	0.6%	0%	0%		0.5%	-
Bicycles on Road	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	-
Bicycles on Road %	0%	0%	0%	0%		0%	0%	0%	0%	0%		0%	0%	0%	0%	0%		0%	0%	0%	0%	0%		0%	-
Pedestrians	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-
Pedestrians%	-	-	-	-	0%	-	-	-	-	-	0%	-	-	-	-	-	0%	-	-	-	-	-	0%	-	-



Peak Hour: 03:15 PM - 04:15 PM Weather: Overcast Clouds (14.32 °C)


Start Time	N Approach CHINGUACOUSY RD						E Approach MAYFIELD RD						S Approach CHINGUACOUSY RD						W Approach MAYFIELD RD						Int. Total (15 min)
	Right	Thru	Left	UTurn	Peds	Approach Total	Right	Thru	Left	UTurn	Peds	Approach Total	Right	Thru	Left	UTurn	Peds	Approach Total	Right	Thru	Left	UTurn	Peds	Approach Total	
15:15:00	14	23	4	0	0	41	5	154	35	0	0	194	33	47	13	0	3	93	16	170	10	0	0	196	524
15:30:00	8	30	3	0	0	41	3	140	28	0	0	171	31	34	8	0	0	73	10	162	16	0	0	188	473
15:45:00	14	28	2	0	0	44	6	153	32	0	0	191	24	32	10	0	0	66	15	174	17	0	0	206	507
16:00:00	12	36	2	0	0	50	9	141	34	0	0	184	21	24	7	0	0	52	11	162	9	0	0	182	468
Grand Total	48	117	11	0	0	176	23	588	129	0	0	740	109	137	38	0	3	284	52	668	52	0	0	772	1972
Approach%	27.3%	66.5%	6.3%	0%		-	3.1%	79.5%	17.4%	0%		-	38.4%	48.2%	13.4%	0%		-	6.7%	86.5%	6.7%	0%		-	-
Totals %	2.4%	5.9%	0.6%	0%		8.9%	1.2%	29.8%	6.5%	0%		37.5%	5.5%	6.9%	1.9%	0%		14.4%	2.6%	33.9%	2.6%	0%		39.1%	-
PHF	0.86	0.81	0.69	0		0.88	0.64	0.95	0.92	0		0.95	0.83	0.73	0.73	0		0.76	0.81	0.96	0.76	0		0.94	-
Heavy	14	7	3	0		24	4	33	6	0		43	5	1	5	0		11	9	67	19	0		95	-
Heavy %	29.2%	6%	27.3%	0%		13.6%	17.4%	5.6%	4.7%	0%		5.8%	4.6%	0.7%	13.2%	0%		3.9%	17.3%	10%	36.5%	0%		12.3%	-
Lights	34	110	8	0		152	19	555	123	0		697	104	136	33	0		273	43	601	33	0		677	-
Lights %	70.8%	94%	72.7%	0%		86.4%	82.6%	94.4%	95.3%	0%		94.2%	95.4%	99.3%	86.8%	0%		96.1%	82.7%	90%	63.5%	0%		87.7%	-
Single-Unit Trucks	11	0	1	0		12	0	11	0	0		11	1	0	0	0		1	1	17	13	0		31	-
Single-Unit Trucks %	22.9%	0%	9.1%	0%		6.8%	0%	1.9%	0%	0%		1.5%	0.9%	0%	0%	0%		0.4%	1.9%	2.5%	25%	0%		4%	-
Buses	3	7	2	0		12	4	17	6	0		27	3	1	5	0		9	8	35	5	0		48	-
Buses %	6.3%	6%	18.2%	0%		6.8%	17.4%	2.9%	4.7%	0%		3.6%	2.8%	0.7%	13.2%	0%		3.2%	15.4%	5.2%	9.6%	0%		6.2%	-
Articulated Trucks	0	0	0	0		0	0	5	0	0		5	1	0	0	0		1	0	15	1	0		16	-
Articulated Trucks %	0%	0%	0%	0%		0%	0%	0.9%	0%	0%		0.7%	0.9%	0%	0%	0%		0.4%	0%	2.2%	1.9%	0%		2.1%	-
Bicycles on Road	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	-
Bicycles on Road %	0%	0%	0%	0%		0%	0%	0%	0%	0%		0%	0%	0%	0%	0%		0%	0%	0%	0%	0%		0%	-
Pedestrians	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	3	-	-	-	-	-	0	-	-
Pedestrians%	-	-	-	-	0%	-	-	-	-	-	0%	-	-	-	-	-	100%	-	-	-	-	-	0%	-	-

Peak Hour: 07:45 AM - 08:45 AM Weather: Overcast Clouds (7.73 °C)

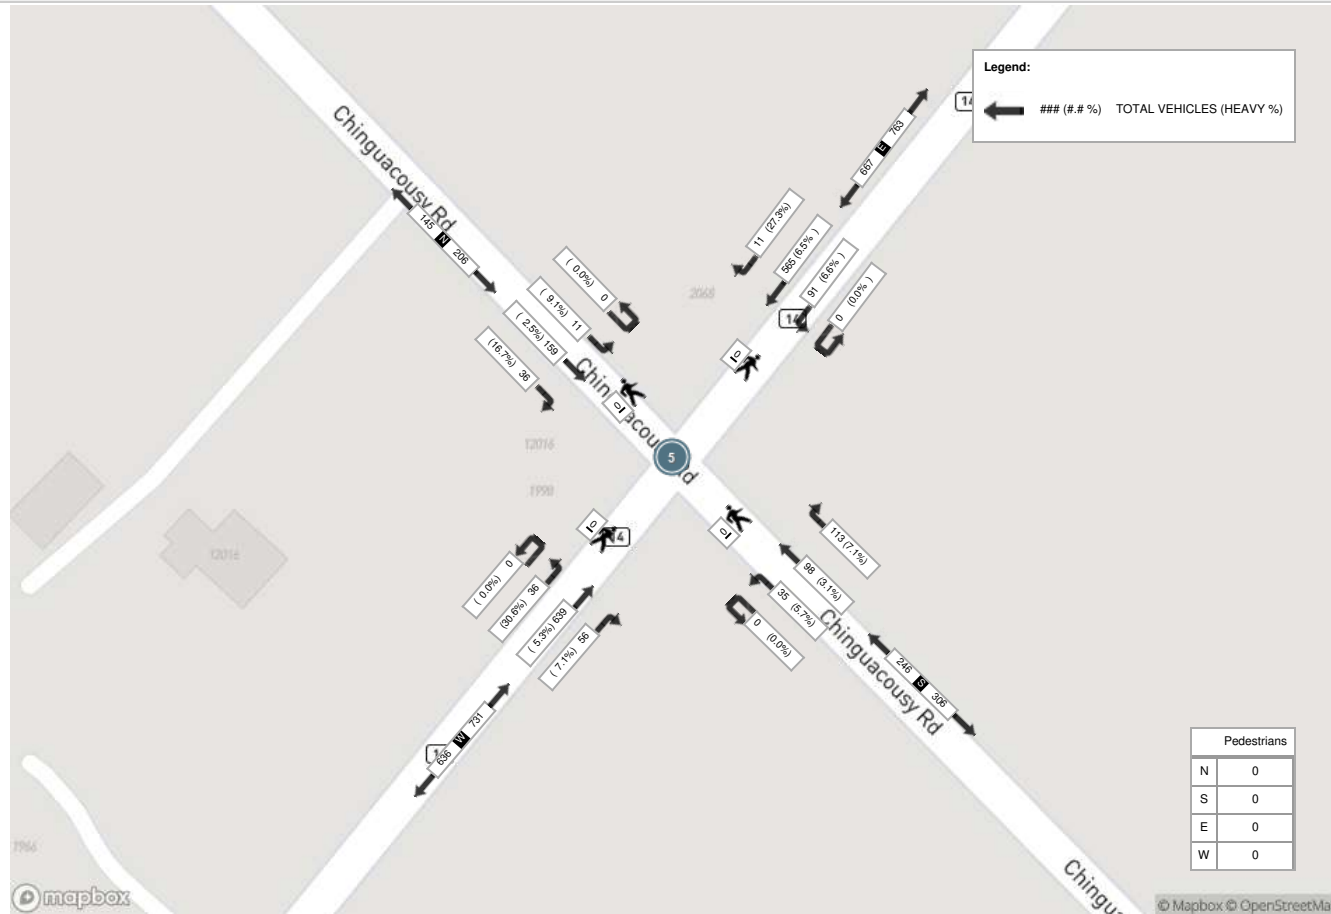



Peak Hour: 03:15 PM - 04:15 PM Weather: Overcast Clouds (14.32 °C)

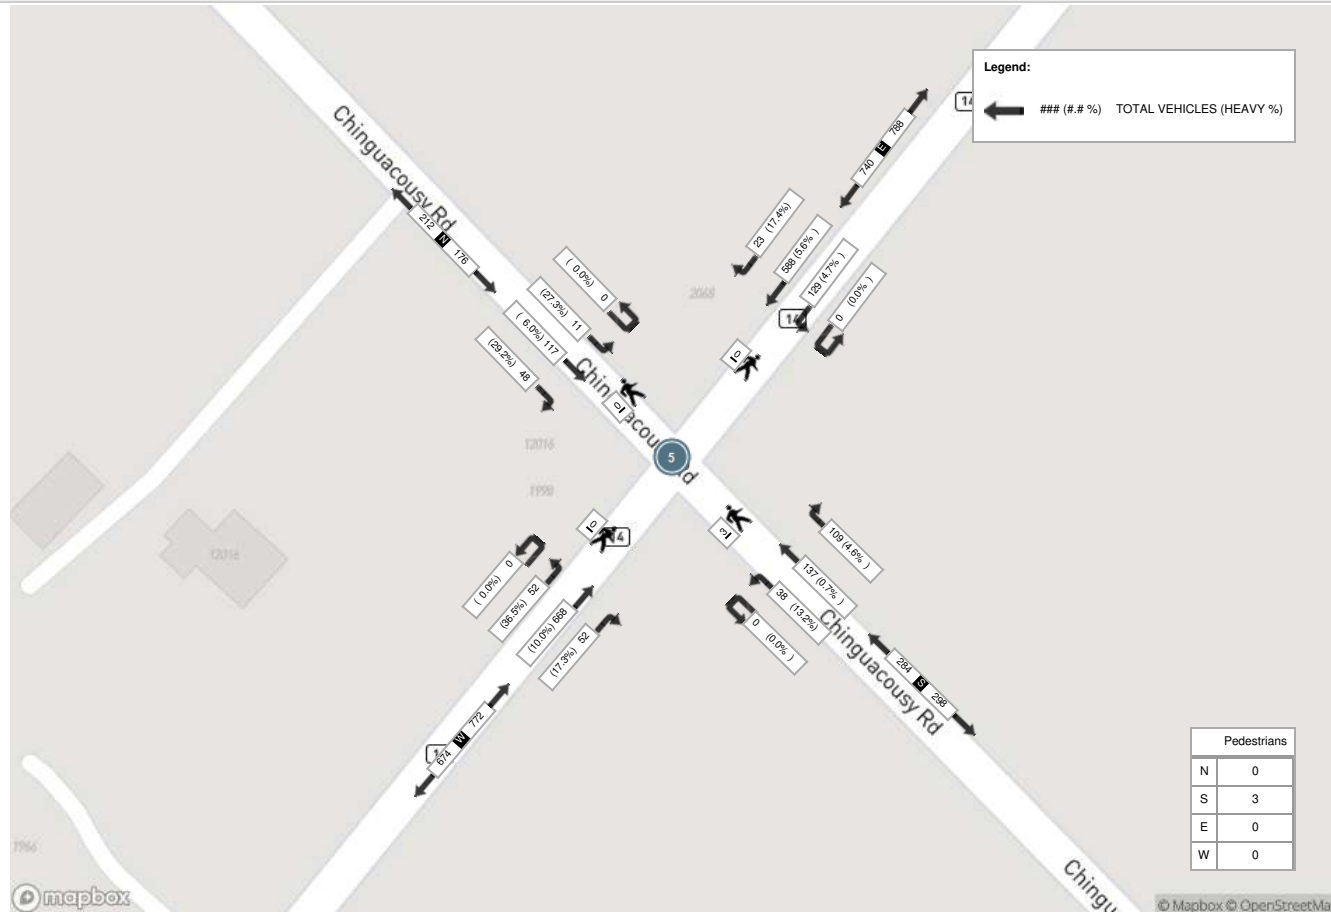



Turning Movement Count (9 . MAYFIELD RD & CREDITVIEW RD) CustID: 01420659

Start Time	N Approach CREDITVIEW RD						S Approach CREDITVIEW RD						W Approach MAYFIELD RD						E Approach MAYFIELD RD						Int. Total (15 min)	Int. Total (1 hr)	
	Right N-W	Thru N-S	Left N-E	UTurn N-N	Peds N:	Approach Total	Right S-E	Thru S-N	Left S-W	UTurn S-S	Peds S:	Approach Total	Right W-S	Thru W-E	Left W-N	UTurn W-W	Peds W:	Approach Total	Right E-N	Thru E-W	Left E-S	UTurn E-E	Peds E:	Approach Total			
06:00:00	3	2	1	0	0	6	17	16	7	0	0	40	3	68	1	0	0	72	2	69	4	0	0	75	193		
06:15:00	3	13	1	0	0	17	14	12	8	0	0	34	5	61	6	0	0	72	0	79	7	0	0	86	209		
06:30:00	2	4	1	0	0	7	8	12	12	0	0	32	0	95	4	0	0	99	1	137	9	0	0	147	285		
06:45:00	3	17	0	0	0	20	20	14	12	0	0	46	4	71	1	0	0	76	0	109	8	0	0	117	259	946	
07:00:00	6	15	1	0	0	22	16	19	8	0	1	43	6	114	8	0	0	128	1	106	12	0	0	119	312	1065	
07:15:00	4	26	3	0	0	33	24	19	5	0	0	48	8	119	5	0	0	132	1	109	15	0	0	125	338	1194	
07:30:00	3	32	2	0	0	37	21	20	12	0	0	53	4	124	5	0	0	133	1	104	23	0	0	128	351	1260	
07:45:00	4	26	1	0	0	31	26	14	5	0	0	45	10	115	3	0	0	128	2	116	25	0	0	143	347	1348	
08:00:00	7	30	1	0	0	38	28	30	12	0	0	70	13	124	4	0	0	141	0	140	23	0	0	163	412	1448	
08:15:00	8	14	5	0	0	27	37	25	11	0	0	73	12	144	6	0	0	162	1	135	23	0	0	159	421	1531	
08:30:00	7	17	0	0	0	24	34	20	15	0	0	69	9	116	7	0	0	132	0	119	20	0	0	139	364	1544	
08:45:00	3	14	1	0	0	18	22	12	18	0	0	52	7	84	4	0	0	95	0	150	26	0	0	176	341	1538	
09:00:00	3	4	3	0	0	10	22	15	21	0	0	58	4	136	6	0	0	146	0	153	17	0	0	170	384	1510	
09:15:00	7	11	3	0	0	21	16	9	8	0	0	33	7	112	3	0	0	122	2	102	12	0	0	116	292	1381	
09:30:00	1	7	1	0	0	9	24	13	11	0	0	48	5	89	2	0	0	96	0	92	22	0	0	114	267	1284	
09:45:00	6	11	2	0	0	19	15	9	3	0	0	27	5	107	3	0	0	115	1	86	17	0	0	104	265	1208	
***BREAK***																											
15:00:00	4	15	3	0	0	22	38	27	20	0	0	85	11	139	4	0	0	154	0	108	31	0	0	139	400		
15:15:00	0	14	2	0	0	16	27	20	15	0	0	62	12	146	4	0	0	162	3	121	32	0	0	156	396		
15:30:00	4	12	1	0	0	17	30	28	23	0	0	81	13	165	2	0	2	180	1	122	26	0	0	149	427		
15:45:00	12	29	2	0	0	43	25	22	18	0	1	65	21	164	7	0	2	192	3	112	25	0	1	140	440	1663	
16:00:00	8	19	1	0	0	28	17	25	12	0	0	54	14	139	6	0	0	159	2	108	29	0	0	139	380	1643	
16:15:00	3	34	2	0	0	39	32	28	15	0	0	75	9	128	2	0	0	139	1	104	32	0	0	137	390	1637	
16:30:00	5	26	2	0	0	33	24	24	10	0	0	58	8	134	2	0	0	144	2	120	17	0	0	139	374	1584	
16:45:00	8	24	4	0	0	36	28	17	14	0	2	59	12	140	5	0	0	157	0	94	31	0	0	125	377	1521	
17:00:00	5	26	1	0	0	32	19	26	11	0	1	56	11	140	5	0	0	156	2	110	24	0	0	136	380	1521	
17:15:00	4	30	2	0	0	36	32	18	11	0	0	61	10	148	7	0	0	165	3	102	31	0	0	136	398	1529	
17:30:00	3	30	1	0	0	34	30	16	13	0	0	59	10	159	4	0	0	173	3	101	31	0	0	135	401	1556	
17:45:00	2	24	2	0	0	28	26	14	9	0	0	49	12	144	1	0	0	157	2	101	41	0	0	144	378	1557	
18:00:00	4	22	1	0	0	27	32	32	9	0	0	73	14	140	9	0	0	163	1	105	37	0	0	143	406	1583	
18:15:00	6	32	1	0	0	39	28	14	12	0	0	54	7	155	2	0	0	164	4	102	31	0	0	137	394	1579	
18:30:00	6	27	2	0	0	35	26	15	9	0	0	50	12	116	6	0	0	134	1	102	36	0	0	139	358	1536	
18:45:00	7	12	3	0	0	22	36	26	7	0	1	69	13	114	3	0	0	130	1	84	31	0	0	116	337	1495	
Grand Total	151	619	56	0	0	826	794	611	376	0	6	1781	291	3950	137	0	4	4378	41	3502	748	0	1	4291	11276	-	
Approach%	18.3%	74.9%	6.8%	0%		-	44.6%	34.3%	21.1%	0%		-	6.6%	90.2%	3.1%	0%		-	1%	81.6%	17.4%	0%		-	-	-	
Totals %	1.3%	5.5%	0.5%	0%		7.3%	7%	5.4%	3.3%	0%		15.8%	2.6%	35%	1.2%	0%		38.8%	0.4%	31.1%	6.6%	0%		38.1%	-	-	
Heavy	4	14	6	0		-	40	15	32	0		-	21	256	4	0		-	2	249	37	0		-	-	-	
Heavy %	2.6%	2.3%	10.7%	0%		-	5%	2.5%	8.5%	0%		-	7.2%	6.5%	2.9%	0%		-	4.9%	7.1%	4.9%	0%		-	-	-	
Bicycles	-	-	-	-		-	-	-	-	-		-	-	-	-	-		-	-	-	-	-		-	-	-	
Bicycle %	-	-	-	-		-	-	-	-	-		-	-	-	-	-		-	-	-	-	-		-	-	-	



Peak Hour: 07:45 AM - 08:45 AM Weather: Overcast Clouds (7.73 °C)

Start Time	N Approach CREDITVIEW RD						S Approach CREDITVIEW RD						W Approach MAYFIELD RD						E Approach MAYFIELD RD						Int. Total (15 min)
	Right	Thru	Left	UTurn	Peds	Approach Total	Right	Thru	Left	UTurn	Peds	Approach Total	Right	Thru	Left	UTurn	Peds	Approach Total	Right	Thru	Left	UTurn	Peds	Approach Total	
07:45:00	4	26	1	0	0	31	26	14	5	0	0	45	10	115	3	0	0	128	2	116	25	0	0	143	347
08:00:00	7	30	1	0	0	38	28	30	12	0	0	70	13	124	4	0	0	141	0	140	23	0	0	163	412
08:15:00	8	14	5	0	0	27	37	25	11	0	0	73	12	144	6	0	0	162	1	135	23	0	0	159	421
08:30:00	7	17	0	0	0	24	34	20	15	0	0	69	9	116	7	0	0	132	0	119	20	0	0	139	364
Grand Total	26	87	7	0	0	120	125	89	43	0	0	257	44	499	20	0	0	563	3	510	91	0	0	604	1544
Approach%	21.7%	72.5%	5.8%	0%		-	48.6%	34.6%	16.7%	0%		-	7.8%	88.6%	3.6%	0%		-	0.5%	84.4%	15.1%	0%		-	-
Totals %	1.7%	5.6%	0.5%	0%		7.8%	8.1%	5.8%	2.8%	0%		16.6%	2.8%	32.3%	1.3%	0%		36.5%	0.2%	33%	5.9%	0%		39.1%	-
PHF	0.81	0.73	0.35	0		0.79	0.84	0.74	0.72	0		0.88	0.85	0.87	0.71	0		0.87	0.38	0.91	0.91	0		0.93	-
Heavy	1	1	2	0		4	8	2	5	0		15	2	39	0	0		41	0	35	6	0		41	-
Heavy %	3.8%	1.1%	28.6%	0%		3.3%	6.4%	2.2%	11.6%	0%		5.8%	4.5%	7.8%	0%	0%		7.3%	0%	6.9%	6.6%	0%		6.8%	-
Lights	25	86	5	0		116	117	87	38	0		242	42	460	20	0		522	3	475	85	0		563	-
Lights %	96.2%	98.9%	71.4%	0%		96.7%	93.6%	97.8%	88.4%	0%		94.2%	95.5%	92.2%	100%	0%		92.7%	100%	93.1%	93.4%	0%		93.2%	-
Single-Unit Trucks	0	0	0	0		0	3	0	0	0		3	0	27	0	0		27	0	17	3	0		20	-
Single-Unit Trucks %	0%	0%	0%	0%		0%	2.4%	0%	0%	0%		1.2%	0%	5.4%	0%	0%		4.8%	0%	3.3%	3.3%	0%		3.3%	-
Buses	0	1	2	0		3	5	2	4	0		11	2	8	0	0		10	0	8	3	0		11	-
Buses %	0%	1.1%	28.6%	0%		2.5%	4%	2.2%	9.3%	0%		4.3%	4.5%	1.6%	0%	0%		1.8%	0%	1.6%	3.3%	0%		1.8%	-
Articulated Trucks	1	0	0	0		1	0	0	1	0		1	0	4	0	0		4	0	10	0	0		10	-
Articulated Trucks %	3.8%	0%	0%	0%		0.8%	0%	0%	2.3%	0%		0.4%	0%	0.8%	0%	0%		0.7%	0%	2%	0%	0%		1.7%	-
Bicycles on Road	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	-
Bicycles on Road %	0%	0%	0%	0%		0%	0%	0%	0%	0%		0%	0%	0%	0%	0%		0%	0%	0%	0%	0%		0%	-
Pedestrians	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-
Pedestrians%	-	-	-	-	0%	-	-	-	-	-	0%	-	-	-	-	-	0%	-	-	-	-	-	0%	-	-
Bicycles on Crosswalk	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-
Bicycles on Crosswalk%	-	-	-	-	0%	-	-	-	-	-	0%	-	-	-	-	-	0%	-	-	-	-	-	0%	-	-



Peak Hour: 03:00 PM - 04:00 PM Weather: Overcast Clouds (14.32 °C)

Start Time	N Approach CREDITVIEW RD						S Approach CREDITVIEW RD						W Approach MAYFIELD RD						E Approach MAYFIELD RD						Int. Total (15 min)
	Right	Thru	Left	UTurn	Peds	Approach Total	Right	Thru	Left	UTurn	Peds	Approach Total	Right	Thru	Left	UTurn	Peds	Approach Total	Right	Thru	Left	UTurn	Peds	Approach Total	
15:00:00	4	15	3	0	0	22	38	27	20	0	0	85	11	139	4	0	0	154	0	108	31	0	0	139	400
15:15:00	0	14	2	0	0	16	27	20	15	0	0	62	12	146	4	0	0	162	3	121	32	0	0	156	396
15:30:00	4	12	1	0	0	17	30	28	23	0	0	81	13	165	2	0	2	180	1	122	26	0	0	149	427
15:45:00	12	29	2	0	0	43	25	22	18	0	1	65	21	164	7	0	2	192	3	112	25	0	1	140	440
Grand Total	20	70	8	0	0	98	120	97	76	0	1	293	57	614	17	0	4	688	7	463	114	0	1	584	1663
Approach%	20.4%	71.4%	8.2%	0%		-	41%	33.1%	25.9%	0%		-	8.3%	89.2%	2.5%	0%		-	1.2%	79.3%	19.5%	0%		-	-
Totals %	1.2%	4.2%	0.5%	0%		5.9%	7.2%	5.8%	4.6%	0%		17.6%	3.4%	36.9%	1%	0%		41.4%	0.4%	27.8%	6.9%	0%		35.1%	-
PHF	0.42	0.6	0.67	0		0.57	0.79	0.87	0.83	0		0.86	0.68	0.93	0.61	0		0.9	0.58	0.95	0.89	0		0.94	-
Heavy	1	0	2	0		3	6	2	15	0		23	4	77	1	0		82	1	33	5	0		39	-
Heavy %	5%	0%	25%	0%		3.1%	5%	2.1%	19.7%	0%		7.8%	7%	12.5%	5.9%	0%		11.9%	14.3%	7.1%	4.4%	0%		6.7%	-
Lights	19	70	6	0		95	114	95	61	0		270	53	537	16	0		606	6	430	109	0		545	-
Lights %	95%	100%	75%	0%		96.9%	95%	97.9%	80.3%	0%		92.2%	93%	87.5%	94.1%	0%		88.1%	85.7%	92.9%	95.6%	0%		93.3%	-
Single-Unit Trucks	0	0	1	0		1	1	0	1	0		2	1	27	0	0		28	0	14	1	0		15	-
Single-Unit Trucks %	0%	0%	12.5%	0%		1%	0.8%	0%	1.3%	0%		0.7%	1.8%	4.4%	0%	0%		4.1%	0%	3%	0.9%	0%		2.6%	-
Buses	1	0	1	0		2	5	2	14	0		21	3	36	1	0		40	1	15	4	0		20	-
Buses %	5%	0%	12.5%	0%		2%	4.2%	2.1%	18.4%	0%		7.2%	5.3%	5.9%	5.9%	0%		5.8%	14.3%	3.2%	3.5%	0%		3.4%	-
Articulated Trucks	0	0	0	0		0	0	0	0	0		0	0	14	0	0		14	0	4	0	0		4	-
Articulated Trucks %	0%	0%	0%	0%		0%	0%	0%	0%	0%		0%	0%	2.3%	0%	0%		2%	0%	0.9%	0%	0%		0.7%	-
Bicycles on Road	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	-
Bicycles on Road %	0%	0%	0%	0%		0%	0%	0%	0%	0%		0%	0%	0%	0%	0%		0%	0%	0%	0%	0%		0%	-
Pedestrians	-	-	-	-	0	-	-	-	-	-	1	-	-	-	-	-	4	-	-	-	-	-	1	-	-
Pedestrians%	-	-	-	-	0%	-	-	-	-	-	16.7%	-	-	-	-	-	66.7%	-	-	-	-	-	16.7%	-	-
Bicycles on Crosswalk	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-
Bicycles on Crosswalk%	-	-	-	-	0%	-	-	-	-	-	0%	-	-	-	-	-	0%	-	-	-	-	-	0%	-	-

Peak Hour: 07:45 AM - 08:45 AM Weather: Overcast Clouds (7.73 °C)



Peak Hour: 03:00 PM - 04:00 PM Weather: Overcast Clouds (14.32 °C)





Turning Movement Count (10 . MAYFIELD RD & ROBERT PARKINSON DR) CustID: 01421014

Start Time	E Approach MAYFIELD RD					S Approach ROBERT PARKINSON DR					W Approach MAYFIELD RD					Int. Total (15 min)	Int. Total (1 hr)
	Thru E:W	Left E:S	UTurn E:E	Peds E:	Approach Total	Right S:E	Left S:W	UTurn S:S	Peds S:	Approach Total	Right W:S	Thru W:E	UTurn W:W	Peds W:	Approach Total		
06:00:00	74	6	0	0	80	16	6	0	0	22	1	51	0	0	52	154	
06:15:00	87	5	0	0	92	14	7	0	0	21	2	65	0	0	67	180	
06:30:00	138	6	0	0	144	9	6	0	0	15	1	89	0	0	90	249	
06:45:00	118	7	0	0	125	14	8	0	0	22	0	66	0	0	66	213	796
07:00:00	110	7	0	0	117	22	6	0	0	28	4	107	0	0	111	256	898
07:15:00	113	4	0	0	117	21	3	0	0	24	3	110	0	0	113	254	972
07:30:00	112	3	0	0	115	16	5	0	0	21	5	115	0	0	120	256	979
07:45:00	124	4	0	0	128	15	10	0	0	25	4	126	0	0	130	283	1049
08:00:00	153	7	0	0	160	17	4	0	0	21	2	121	0	0	123	304	1097
08:15:00	141	10	0	0	151	24	7	0	0	31	8	144	0	0	152	334	1177
08:30:00	140	7	0	0	147	26	7	0	0	33	5	104	0	0	109	289	1210
08:45:00	161	7	0	0	168	19	7	0	0	26	5	86	0	0	91	285	1212
09:00:00	168	10	0	0	178	19	9	0	0	28	12	127	0	0	139	345	1253
09:15:00	112	6	0	0	118	14	2	0	0	16	5	113	0	0	118	252	1171
09:30:00	95	8	0	0	103	10	2	0	0	12	3	87	0	0	90	205	1087
09:45:00	87	8	0	0	95	25	4	0	0	29	5	93	0	0	98	222	1024
***BREAK***																	
15:00:00	129	9	0	0	138	19	9	0	0	28	9	148	0	0	157	323	
15:15:00	126	17	0	0	143	20	10	0	0	30	12	141	0	0	153	326	
15:30:00	128	17	0	0	145	15	3	0	0	18	9	182	0	0	191	354	
15:45:00	121	24	0	0	145	17	5	0	0	22	16	185	0	0	201	368	1371
16:00:00	106	29	0	0	135	12	1	0	0	13	12	146	0	0	158	306	1354
16:15:00	111	11	0	0	122	21	6	0	0	27	4	131	0	0	135	284	1312
16:30:00	119	20	0	0	139	17	7	0	0	24	7	134	0	0	141	304	1262
16:45:00	108	14	0	0	122	18	6	0	0	24	8	147	0	0	155	301	1195
17:00:00	108	18	0	0	126	23	5	0	0	28	5	141	0	0	146	300	1189
17:15:00	107	19	0	0	126	10	2	0	0	12	11	165	0	0	176	314	1219
17:30:00	99	16	0	0	115	19	11	0	0	30	8	169	0	0	177	322	1237
17:45:00	110	14	0	0	124	9	10	0	0	19	15	152	0	0	167	310	1246
18:00:00	103	15	0	0	118	25	9	0	2	34	9	152	0	0	161	313	1259
18:15:00	102	21	0	0	123	18	13	0	0	31	12	160	0	0	172	326	1271
18:30:00	92	31	0	0	123	15	7	0	0	22	12	133	0	0	145	290	1239
18:45:00	91	9	0	0	100	14	6	0	1	20	10	120	0	0	130	250	1179



Grand Total	3693	389	0	0	4082	553	203	0	3	756	224	4010	0	0	4234	9072	-
Approach%	90.5%	9.5%	0%		-	73.1%	26.9%	0%		-	5.3%	94.7%	0%		-	-	-
Totals %	40.7%	4.3%	0%		45%	6.1%	2.2%	0%		8.3%	2.5%	44.2%	0%		46.7%	-	-
Heavy	263	21	0		-	25	4	0		-	13	258	0		-	-	-
Heavy %	7.1%	5.4%	0%		-	4.5%	2%	0%		-	5.8%	6.4%	0%		-	-	-
Bicycles	-	-	-		-	-	-	-		-	-	-	-		-	-	-
Bicycle %	-	-	-		-	-	-	-		-	-	-	-		-	-	-





Peak Hour: 08:15 AM - 09:15 AM Weather: Overcast Clouds (7.73 °C)


Start Time	E Approach MAYFIELD RD					S Approach ROBERT PARKINSON DR					W Approach MAYFIELD RD					Int. Total (15 min)
	Thru	Left	UTurn	Peds	Approach Total	Right	Left	UTurn	Peds	Approach Total	Right	Thru	UTurn	Peds	Approach Total	
08:15:00	141	10	0	0	151	24	7	0	0	31	8	144	0	0	152	334
08:30:00	140	7	0	0	147	26	7	0	0	33	5	104	0	0	109	289
08:45:00	161	7	0	0	168	19	7	0	0	26	5	86	0	0	91	285
09:00:00	168	10	0	0	178	19	9	0	0	28	12	127	0	0	139	345
Grand Total	610	34	0	0	644	88	30	0	0	118	30	461	0	0	491	1253
Approach%	94.7%	5.3%	0%		-	74.6%	25.4%	0%		-	6.1%	93.9%	0%		-	-
Totals %	48.7%	2.7%	0%		51.4%	7%	2.4%	0%		9.4%	2.4%	36.8%	0%		39.2%	-
PHF	0.91	0.85	0		0.9	0.85	0.83	0		0.89	0.63	0.8	0		0.81	-
Heavy	73	2	0		75	3	1	0		4	5	47	0		52	-
Heavy %	12%	5.9%	0%		11.6%	3.4%	3.3%	0%		3.4%	16.7%	10.2%	0%		10.6%	-
Lights	537	32	0		569	85	29	0		114	25	414	0		439	-
Lights %	88%	94.1%	0%		88.4%	96.6%	96.7%	0%		96.6%	83.3%	89.8%	0%		89.4%	-
Single-Unit Trucks	26	0	0		26	0	0	0		0	0	16	0		16	-
Single-Unit Trucks %	4.3%	0%	0%		4%	0%	0%	0%		0%	0%	3.5%	0%		3.3%	-
Buses	34	2	0		36	3	1	0		4	5	29	0		34	-
Buses %	5.6%	5.9%	0%		5.6%	3.4%	3.3%	0%		3.4%	16.7%	6.3%	0%		6.9%	-
Articulated Trucks	13	0	0		13	0	0	0		0	0	2	0		2	-
Articulated Trucks %	2.1%	0%	0%		2%	0%	0%	0%		0%	0%	0.4%	0%		0.4%	-
Bicycles on Road	0	0	0		0	0	0	0		0	0	0	0		0	-
Bicycles on Road %	0%	0%	0%		0%	0%	0%	0%		0%	0%	0%	0%		0%	-
Pedestrians	-	-	-	0	-	-	-	-	0	-	-	-	-	0	-	-
Pedestrians%	-	-	-	0%	-	-	-	-	0%	-	-	-	-	0%	-	-




Peak Hour: 03:00 PM - 04:00 PM Weather: Overcast Clouds (14.32 °C)

Start Time	E Approach MAYFIELD RD					S Approach ROBERT PARKINSON DR					W Approach MAYFIELD RD					Int. Total (15 min)
	Thru	Left	UTurn	Peds	Approach Total	Right	Left	UTurn	Peds	Approach Total	Right	Thru	UTurn	Peds	Approach Total	
15:00:00	129	9	0	0	138	19	9	0	0	28	9	148	0	0	157	323
15:15:00	126	17	0	0	143	20	10	0	0	30	12	141	0	0	153	326
15:30:00	128	17	0	0	145	15	3	0	0	18	9	182	0	0	191	354
15:45:00	121	24	0	0	145	17	5	0	0	22	16	185	0	0	201	368
Grand Total	504	67	0	0	571	71	27	0	0	98	46	656	0	0	702	1371
Approach%	88.3%	11.7%	0%		-	72.4%	27.6%	0%		-	6.6%	93.4%	0%		-	-
Totals %	36.8%	4.9%	0%		41.6%	5.2%	2%	0%		7.1%	3.4%	47.8%	0%		51.2%	-
PHF	0.98	0.7	0		0.98	0.89	0.68	0		0.82	0.72	0.89	0		0.87	-
Heavy	46	3	0		49	5	3	0		8	1	78	0		79	-
Heavy %	9.1%	4.5%	0%		8.6%	7%	11.1%	0%		8.2%	2.2%	11.9%	0%		11.3%	-
Lights	458	64	0		522	66	24	0		90	45	578	0		623	-
Lights %	90.9%	95.5%	0%		91.4%	93%	88.9%	0%		91.8%	97.8%	88.1%	0%		88.7%	-
Single-Unit Trucks	15	0	0		15	1	0	0		1	0	26	0		26	-
Single-Unit Trucks %	3%	0%	0%		2.6%	1.4%	0%	0%		1%	0%	4%	0%		3.7%	-
Buses	27	3	0		30	4	3	0		7	1	36	0		37	-
Buses %	5.4%	4.5%	0%		5.3%	5.6%	11.1%	0%		7.1%	2.2%	5.5%	0%		5.3%	-
Articulated Trucks	4	0	0		4	0	0	0		0	0	16	0		16	-
Articulated Trucks %	0.8%	0%	0%		0.7%	0%	0%	0%		0%	0%	2.4%	0%		2.3%	-
Bicycles on Road	0	0	0		0	0	0	0		0	0	0	0		0	-
Bicycles on Road %	0%	0%	0%		0%	0%	0%	0%		0%	0%	0%	0%		0%	-
Pedestrians	-	-	-	0	-	-	-	-	0	-	-	-	-	0	-	-
Pedestrians%	-	-	-	0%	-	-	-	-	0%	-	-	-	-	0%	-	-

**Peak Hour: 08:15 AM - 09:15 AM    Weather: Overcast Clouds (7.73 °C)**

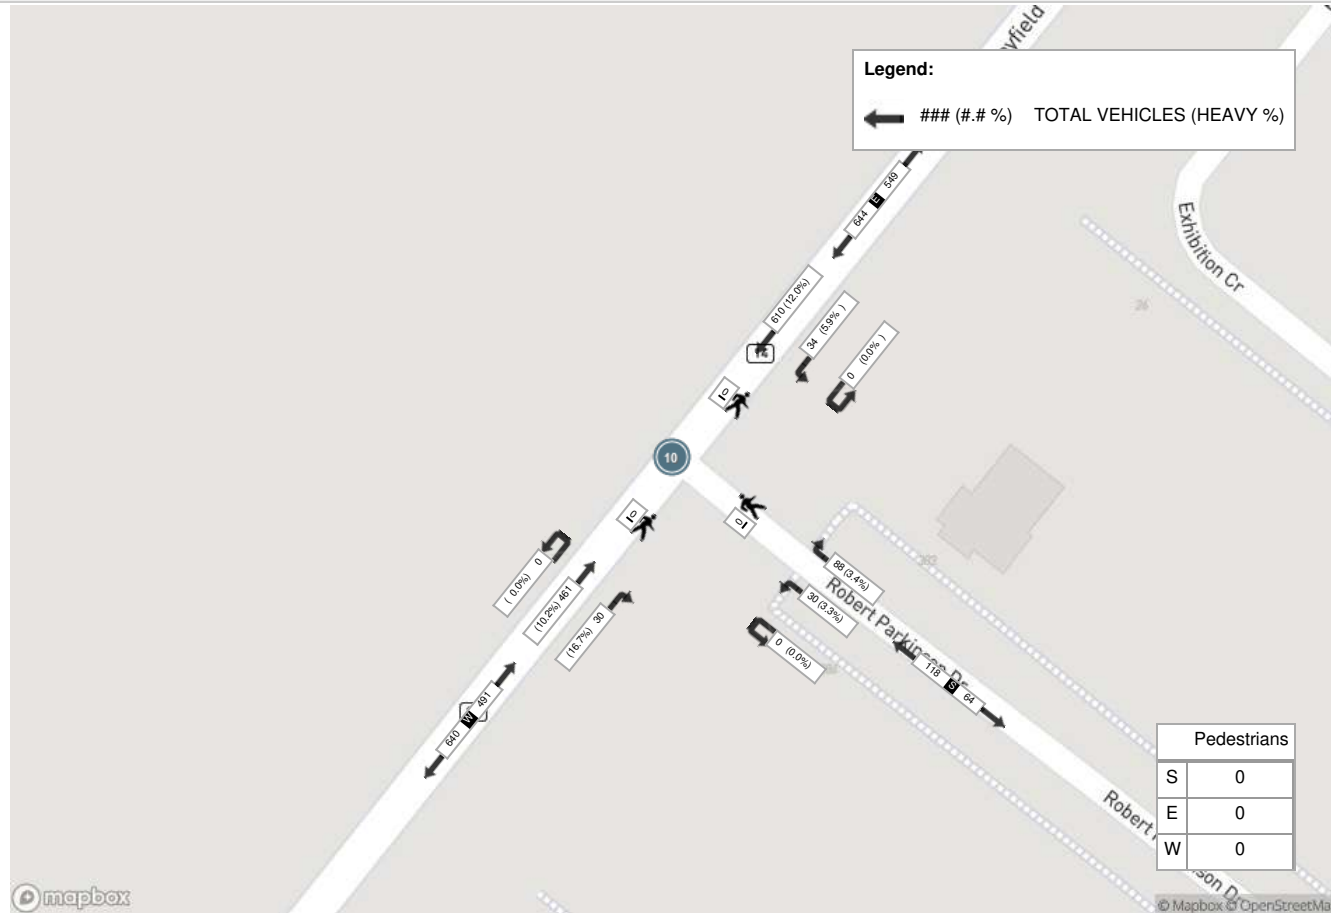

**Peak Hour: 03:00 PM - 04:00 PM    Weather: Overcast Clouds (14.32 °C)**

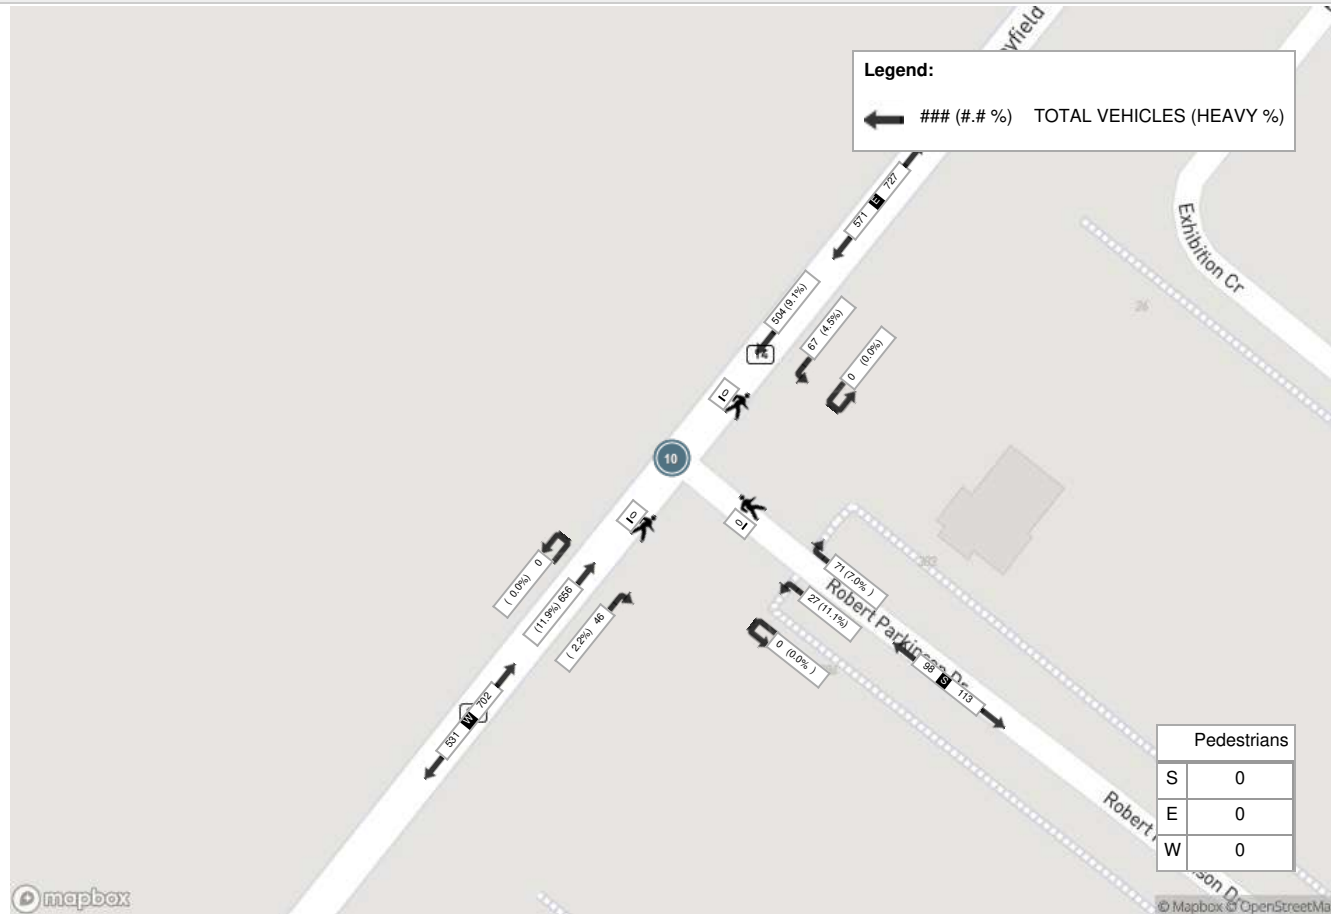



Turning Movement Count (8 . MAYFIELD RD & THORNBUSH BLVD) CustID: 01420377

Start Time	E Approach MAYFIELD RD					S Approach THORNBUSH BLVD					W Approach MAYFIELD RD					Int. Total (15 min)	Int. Total (1 hr)
	Thru E:W	Left E:S	UTurn E:E	Peds E:	Approach Total	Right S:E	Left S:W	UTurn S:S	Peds S:	Approach Total	Right W:S	Thru W:E	UTurn W:W	Peds W:	Approach Total		
06:00:00	82	1	0	0	83	9	0	0	0	9	0	87	0	0	87	179	
06:15:00	83	0	0	0	83	10	1	0	0	11	0	86	0	0	86	180	
06:30:00	143	2	0	0	145	8	0	0	0	8	1	94	0	0	95	248	
06:45:00	114	3	0	0	117	6	0	0	0	6	0	94	0	0	94	217	824
07:00:00	119	1	0	0	120	10	2	0	0	12	0	130	0	0	130	262	907
07:15:00	128	5	0	0	133	17	1	0	0	18	0	147	0	0	147	298	1025
07:30:00	130	8	0	0	138	10	4	0	0	14	0	146	0	0	146	298	1075
07:45:00	144	5	0	0	149	6	2	0	0	8	0	148	0	0	148	305	1163
08:00:00	152	1	0	0	153	11	2	0	0	13	3	152	0	0	155	321	1222
08:15:00	154	5	0	0	159	7	2	0	0	9	0	185	0	0	185	353	1277
08:30:00	138	8	0	0	146	8	0	0	0	8	0	153	0	0	153	307	1286
08:45:00	183	3	0	0	186	14	3	0	0	17	1	111	0	0	112	315	1296
09:00:00	163	4	0	0	167	11	3	0	0	14	0	154	0	0	154	335	1310
09:15:00	101	2	0	0	103	11	2	0	0	13	0	138	0	0	138	254	1211
09:30:00	114	1	0	0	115	5	0	0	0	5	1	112	0	0	113	233	1137
09:45:00	99	7	0	0	106	6	2	0	0	8	2	122	0	0	124	238	1060
***BREAK***																	
15:00:00	147	9	0	0	156	7	2	0	0	9	1	180	0	0	181	346	
15:15:00	157	6	0	0	163	6	1	0	0	7	2	167	0	0	169	339	
15:30:00	143	10	0	0	153	5	1	0	0	6	2	189	0	0	191	350	
15:45:00	140	11	0	0	151	8	3	0	0	11	5	195	0	0	200	362	1397
16:00:00	137	17	0	0	154	10	1	0	0	11	1	157	0	0	158	323	1374
16:15:00	131	11	0	0	142	4	1	0	0	5	3	157	0	0	160	307	1342
16:30:00	139	13	0	0	152	4	2	0	0	6	3	157	0	0	160	318	1310
16:45:00	115	8	0	0	123	4	1	0	0	5	1	168	0	0	169	297	1245
17:00:00	134	10	0	0	144	12	2	0	0	14	2	161	0	0	163	321	1243
17:15:00	139	7	0	0	146	6	1	0	0	7	4	170	1	0	175	328	1264
17:30:00	137	11	0	0	148	4	3	0	0	7	6	192	0	0	198	353	1299
17:45:00	132	9	0	0	141	5	6	0	0	11	4	164	0	0	168	320	1322
18:00:00	145	10	0	0	155	8	0	0	0	8	3	167	0	0	170	333	1334
18:15:00	151	12	0	0	163	11	0	0	0	11	3	189	0	0	192	366	1372
18:30:00	119	6	0	0	125	10	1	0	1	11	6	136	0	0	142	278	1297
18:45:00	115	7	0	0	122	5	1	0	0	6	2	149	0	0	151	279	1256



Grand Total	4228	213	0	0	4441	258	50	0	1	308	56	4757	1	0	4814	9563	-
Approach%	95.2%	4.8%	0%		-	83.8%	16.2%	0%		-	1.2%	98.8%	0%		-	-	-
Totals %	44.2%	2.2%	0%		46.4%	2.7%	0.5%	0%		3.2%	0.6%	49.7%	0%		50.3%	-	-
Heavy	290	8	0		-	9	0	0		-	4	296	0		-	-	-
Heavy %	6.9%	3.8%	0%		-	3.5%	0%	0%		-	7.1%	6.2%	0%		-	-	-
Bicycles	-	-	-		-	-	-	-		-	-	-	-		-	-	-
Bicycle %	-	-	-		-	-	-	-		-	-	-	-		-	-	-



Peak Hour: 08:15 AM - 09:15 AM Weather: Overcast Clouds (7.73 °C)

Start Time	E Approach MAYFIELD RD					S Approach THORNBUSH BLVD					W Approach MAYFIELD RD					Int. Total (15 min)
	Thru	Left	UTurn	Peds	Approach Total	Right	Left	UTurn	Peds	Approach Total	Right	Thru	UTurn	Peds	Approach Total	
08:15:00	154	5	0	0	159	7	2	0	0	9	0	185	0	0	185	353
08:30:00	138	8	0	0	146	8	0	0	0	8	0	153	0	0	153	307
08:45:00	183	3	0	0	186	14	3	0	0	17	1	111	0	0	112	315
09:00:00	163	4	0	0	167	11	3	0	0	14	0	154	0	0	154	335
Grand Total	638	20	0	0	658	40	8	0	0	48	1	603	0	0	604	1310
Approach%	97%	3%	0%		-	83.3%	16.7%	0%		-	0.2%	99.8%	0%		-	-
Totals %	48.7%	1.5%	0%		50.2%	3.1%	0.6%	0%		3.7%	0.1%	46%	0%		46.1%	-
PHF	0.87	0.63	0		0.88	0.71	0.67	0		0.71	0.25	0.81	0		0.82	-
Heavy	74	0	0		74	2	0	0		2	0	61	0		61	-
Heavy %	11.6%	0%	0%		11.2%	5%	0%	0%		4.2%	0%	10.1%	0%		10.1%	-
Lights	564	20	0		584	38	8	0		46	1	542	0		543	-
Lights %	88.4%	100%	0%		88.8%	95%	100%	0%		95.8%	100%	89.9%	0%		89.9%	-
Single-Unit Trucks	31	0	0		31	0	0	0		0	0	18	0		18	-
Single-Unit Trucks %	4.9%	0%	0%		4.7%	0%	0%	0%		0%	0%	3%	0%		3%	-
Buses	32	0	0		32	2	0	0		2	0	40	0		40	-
Buses %	5%	0%	0%		4.9%	5%	0%	0%		4.2%	0%	6.6%	0%		6.6%	-
Articulated Trucks	11	0	0		11	0	0	0		0	0	3	0		3	-
Articulated Trucks %	1.7%	0%	0%		1.7%	0%	0%	0%		0%	0%	0.5%	0%		0.5%	-
Pedestrians	-	-	-	0	-	-	-	-	0	-	-	-	-	0	-	-
Pedestrians%	-	-	-	0%	-	-	-	-	0%	-	-	-	-	0%	-	-




Peak Hour: 03:00 PM - 04:00 PM Weather: Overcast Clouds (14.32 °C)


Start Time	E Approach MAYFIELD RD					S Approach THORNBUSH BLVD					W Approach MAYFIELD RD					Int. Total (15 min)
	Thru	Left	UTurn	Peds	Approach Total	Right	Left	UTurn	Peds	Approach Total	Right	Thru	UTurn	Peds	Approach Total	
15:00:00	147	9	0	0	156	7	2	0	0	9	1	180	0	0	181	346
15:15:00	157	6	0	0	163	6	1	0	0	7	2	167	0	0	169	339
15:30:00	143	10	0	0	153	5	1	0	0	6	2	189	0	0	191	350
15:45:00	140	11	0	0	151	8	3	0	0	11	5	195	0	0	200	362
Grand Total	587	36	0	0	623	26	7	0	0	33	10	731	0	0	741	1397
Approach%	94.2%	5.8%	0%		-	78.8%	21.2%	0%		-	1.3%	98.7%	0%		-	-
Totals %	42%	2.6%	0%		44.6%	1.9%	0.5%	0%		2.4%	0.7%	52.3%	0%		53%	-
PHF	0.93	0.82	0		0.96	0.81	0.58	0		0.75	0.5	0.94	0		0.93	-
Heavy	43	0	0		43	4	0	0		4	1	80	0		81	-
Heavy %	7.3%	0%	0%		6.9%	15.4%	0%	0%		12.1%	10%	10.9%	0%		10.9%	-
Lights	544	36	0		580	22	7	0		29	9	651	0		660	-
Lights %	92.7%	100%	0%		93.1%	84.6%	100%	0%		87.9%	90%	89.1%	0%		89.1%	-
Single-Unit Trucks	17	0	0		17	0	0	0		0	0	27	0		27	-
Single-Unit Trucks %	2.9%	0%	0%		2.7%	0%	0%	0%		0%	0%	3.7%	0%		3.6%	-
Buses	21	0	0		21	4	0	0		4	1	41	0		42	-
Buses %	3.6%	0%	0%		3.4%	15.4%	0%	0%		12.1%	10%	5.6%	0%		5.7%	-
Articulated Trucks	5	0	0		5	0	0	0		0	0	12	0		12	-
Articulated Trucks %	0.9%	0%	0%		0.8%	0%	0%	0%		0%	0%	1.6%	0%		1.6%	-
Pedestrians	-	-	-	0	-	-	-	-	0	-	-	-	-	0	-	-
Pedestrians%	-	-	-	0%	-	-	-	-	0%	-	-	-	-	0%	-	-



**Peak Hour: 08:15 AM - 09:15 AM    Weather: Overcast Clouds (7.73 °C)**

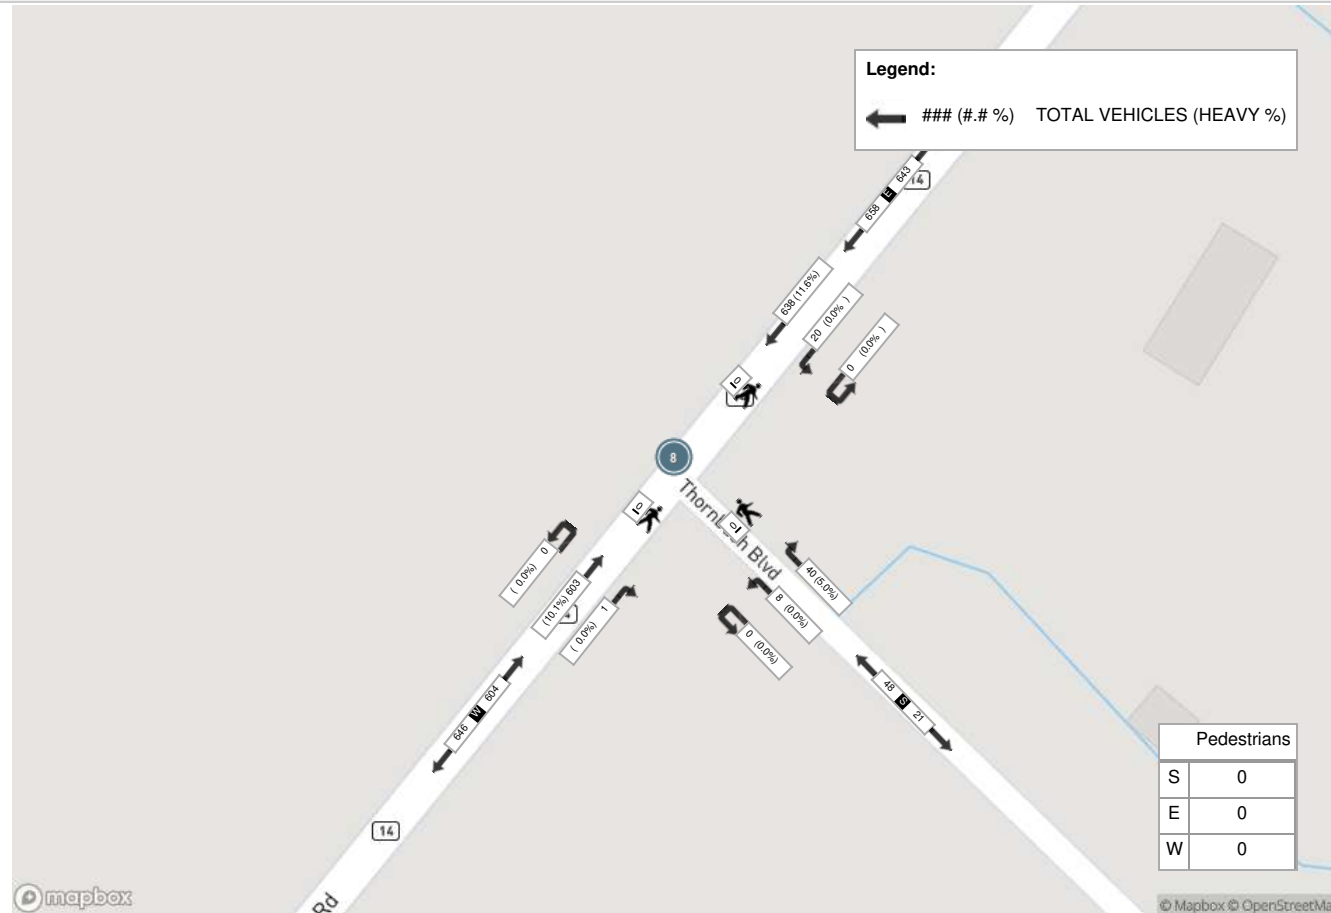

**Peak Hour: 03:00 PM - 04:00 PM    Weather: Overcast Clouds (14.32 °C)**

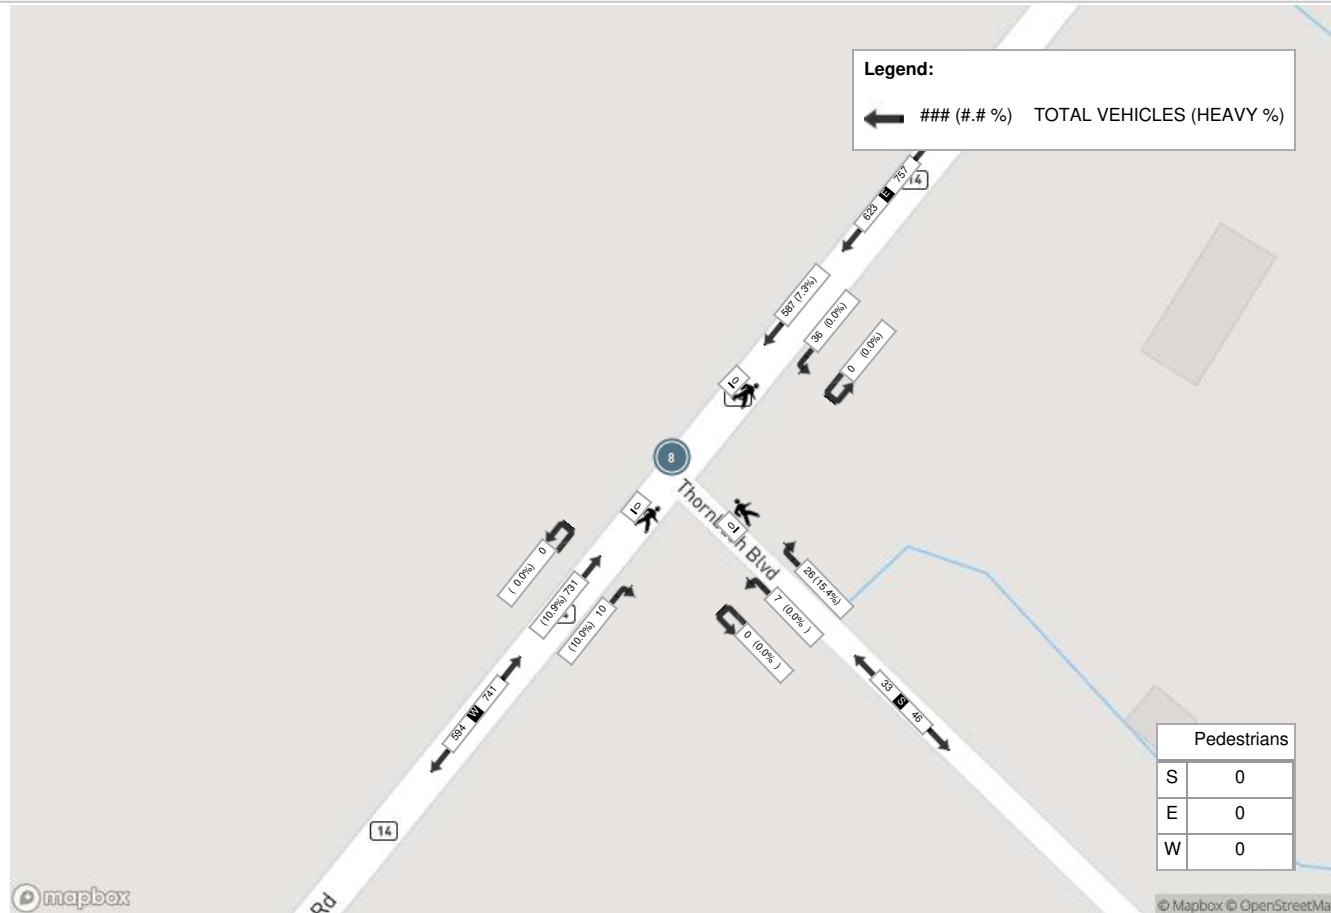

# **APPENDIX B**

## **ENVIRONMENTAL NOISE GUIDELINES**

## APPENDIX B

### ENVIRONMENTAL NOISE GUIDELINES

#### MINISTRY OF THE ENVIRONMENT, CONSERVATION AND PARKS (MECP)

Reference: MECP Publication NPC-300, October 2013: “*Environmental Noise Guideline, Stationary and Transportation Sources – Approval and Planning*”.

SPACE	SOURCE	TIME PERIOD	CRITERION
Living/dining, den areas of residences, hospitals, nursing homes, schools, daycare centres, etc.	Road	07:00 to 23:00	45 dBA
	Rail	07:00 to 23:00	40 dBA
	Aircraft	24-hour period	NEF/NEP 5
Living/dining, den areas of residences, hospitals, nursing homes, etc. (except schools or daycare centres)	Road	23:00 to 07:00	45 dBA
	Rail	23:00 to 07:00	40 dBA
	Aircraft	24-hour period	NEF/NEP 5
Sleeping quarters	Road	07:00 to 23:00	45 dBA
	Rail	07:00 to 23:00	40 dBA
	Aircraft	24-hour period	NEF/NEP 0
Sleeping quarters	Road	23:00 to 07:00	40 dBA
	Rail	23:00 to 07:00	35 dBA
	Aircraft	24-hour period	NEF/NEP 0
Outdoor Living Areas	Road and Rail	07:00 to 23:00	55 dBA
Outdoor Point of Reception	Aircraft	24-hour period	NEF/NEP 30 <sup>#</sup>
	Stationary Source		
	Class 1 Area	07:00 to 19:00 <sup>(1)</sup>	50* dBA
		19:00 to 23:00 <sup>(1)</sup>	50* dBA
	Class 2 Area	07:00 to 19:00 <sup>(2)</sup>	50* dBA
		19:00 to 23:00 <sup>(2)</sup>	45* dBA
	Class 3 Area	07:00 to 19:00 <sup>(3)</sup>	45* dBA
		19:00 to 23:00 <sup>(3)</sup>	40* dBA
	Class 4 Area	07:00 to 19:00 <sup>(4)</sup>	55* dBA
		19:00 to 23:00 <sup>(4)</sup>	55* dBA

..../cont'd

SPACE	SOURCE	TIME PERIOD	CRITERION
Plane of a Window of Noise Sensitive Spaces	Stationary Source Class 1 Area	07:00 to 19:00 <sup>(1)</sup>	50* dBA
		19:00 to 23:00 <sup>(1)</sup>	50* dBA
		23:00 to 07:00 <sup>(1)</sup>	45* dBA
	Class 2 Area	07:00 to 19:00 <sup>(2)</sup>	50* dBA
		19:00 to 23:00 <sup>(2)</sup>	50* dBA
		23:00 to 07:00 <sup>(2)</sup>	45* dBA
	Class 3 Area	07:00 to 19:00 <sup>(3)</sup>	45* dBA
		19:00 to 23:00 <sup>(3)</sup>	45* dBA
		23:00 to 07:00 <sup>(3)</sup>	40* dBA
	Class 4 Area	07:00 to 19:00 <sup>(4)</sup>	60* dBA
		19:00 to 23:00 <sup>(4)</sup>	60* dBA
		23:00 to 07:00 <sup>(4)</sup>	55* dBA

- # may not apply to in-fill or re-development.  
 \* or the minimum hourly background sound exposure  $L_{eq(1)}$ , due to road traffic, if higher.  
 (1) Class 1 Area: Urban.  
 (2) Class 2 Area: Urban during day; rural-like evening and night.  
 (3) Class 3 Area: Rural.  
 (4) Class 4 Area: Subject to land use planning authority's approval.

Reference: MECP Publication ISBN 0-7729-2804-5, 1987: "Environmental Noise Assessment in Land-Use Planning".

EXCESS ABOVE RECOMMENDED SOUND LEVEL LIMITS (dBA)	CHANGE IN SUBJECTIVE LOUDNESS ABOVE	MAGNITUDE OF THE NOISE PROBLEM	NOISE CONTROL MEASURES (OR ACTION TO BE TAKEN)
No excess (<55 dBA)	—	No expected noise problem	None
1 to 5 inclusive (56 to 60 dBA)	Noticeably louder	Slight noise impact	If no physical measures are taken, then prospective purchasers or tenants should be made aware by suitable warning clauses.
6 to 10 inclusive (61 - 65 dBA)	Almost twice as loud	Definite noise impact	Recommended.
11 to 15 inclusive (66 - 70 dBA)	Almost three times as loud	Serious noise impact	Strongly Recommended.
16 and over (>70 dBA)	Almost four times as loud	Very serious noise impact	Strongly Recommended (may be mandatory).

# **APPENDIX C**

## **SAMPLE SOUND LEVEL CALCULATIONS - TRANSPORTATION SOURCES**

STAMSON 5.0                      NORMAL REPORT                      Date: 21-07-2025 10:09:58  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: r1.te                      Time Period: Day/Night 16/8 hours  
Description: **R1 - Block 396 East Facade**

Road data, segment # 1: Chinguacousy (day/night)

-----  
Car traffic volume : 21128/2348    veh/TimePeriod    \*  
Medium truck volume :    738/82    veh/TimePeriod    \*  
Heavy truck volume :    492/55    veh/TimePeriod    \*  
Posted speed limit :    70 km/h  
Road gradient :    0 %  
Road pavement :    1 (Typical asphalt or concrete)

\* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 22950  
Percentage of Annual Growth : 2.00  
Number of Years of Growth : 4.00  
Medium Truck % of Total Volume : 3.30  
Heavy Truck % of Total Volume : 2.20  
Day (16 hrs) % of Total Volume : 90.00

Data for Segment # 1: Chinguacousy (day/night)

-----  
Angle1    Angle2 : -90.00 deg    85.00 deg  
Wood depth :    0    (No woods.)  
No of house rows :    0 / 0  
Surface :    1    (Absorptive ground surface)  
Receiver source distance : 23.00 / 23.00 m  
Receiver height :    7.50 / 7.50 m  
Topography :    1    (Flat/gentle slope; no barrier)  
Reference angle :    0.00

Results segment # 1: Chinguacousy (day)

-----  
Source height = 1.22 m

ROAD (0.00 + 67.21 + 0.00) = 67.21 dBA  
Angle1 Angle2    Alpha RefLeq    P.Adj    D.Adj    F.Adj    W.Adj    H.Adj    B.Adj    SubLeq  
-----  
     -90        85       0.49    71.16       0.00    -2.76    -1.19       0.00       0.00       0.00    67.21  
-----

Segment Leq : 67.21 dBA

Total Leq All Segments: 67.21 dBA

Results segment # 1: Chinguacousy (night)

Source height = 1.22 m

ROAD (0.00 + 60.69 + 0.00) = 60.69 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	85	0.49	64.64	0.00	-2.76	-1.19	0.00	0.00	0.00	60.69

Segment Leq : 60.69 dBA

Total Leq All Segments: 60.69 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 67.21  
(NIGHT): 60.69