


- CONTINUOUS BROOM FINISH ACROSS PATH AND SPRAYED WITH WHITE PIGMENT CURING COMPOUND REFER TO JOINTING DETAIL FOR CONTROL AND EXPANSION JOINTS
- CONCRETE PAVING TO HAVE SRI VALUE OF 41
- GRANULAR EDGE TO EXTEND MIN. 150mm BEYOND CONCRETE. CONCRETE EDGE TO BE FORMED UNIFORMLY, SMOOTH WITH CLEAN EDGES, WITHOUT LATERAL DEVIATIONS
- SOD TO MEET & MATCH EXISTING GRADES, WITH SMOOTH TRANSITIONS AT A MAXIMUM SLOPE OF 3:1. GRADE WALKWAY WITH A MIN 1% CROSS-SLOPE OR AS DIRECTED ON SITE. PONDING WATER ON CONCRETE
- WALKWAYS WILL NOT BE ACCEPTED. ALL MEASUREMENTS ARE IN MILLIMETRES UNLESS STATED OTHERWISE. REFER TO LANDSCAPE PLANS

**CONCRETE PAVING** 

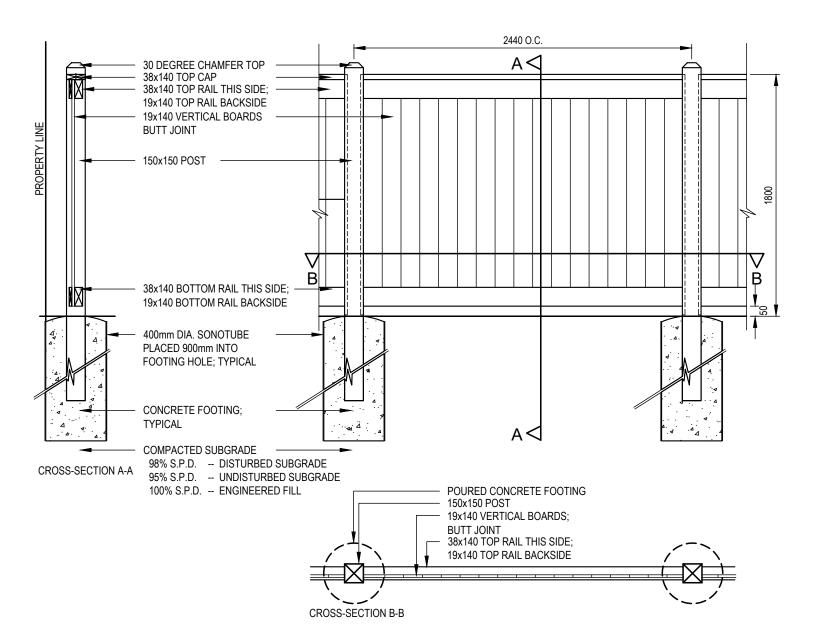

## NOTES:

- 1. ALL MATERIALS, COMPONENTS AND WORKMANSHIP TO CONFORM
- TO BUILDING CODE AND LOCAL BY-LAWS. 2. FENCES CONSTRUCTED ON BERMS:

SLOPES NO STEEPER THAN 3:1

- 2.1. EXTEND FOOTINGS 300mm INTO UNDISTURBED SUB-GRADE.
- 2.2. COMPACT BERMS TO A MINIMUM OF 100% STANDARD PROCTOR DENSITY. 2.3. CONSTRUCT BERMS WITH A 1000mm FLAT TOP AND SIDE
- 2.4. ERECT FENCE ALONG CENTRE-LINE OF BERM. 3. ALL WOOD TO BE WESTERN RED CEDAR, SELECTED MAINLY FOR GOOD APPEARANCE. ALL MEMBERS SHALL BE FREE OF WANE AND BARK POCKETS. ALL TORN GRAIN SHALL BE ELIMINATED BY SANDING AND PLANING. MEMBERS EXHIBITING MODERATE TO HEAVY KNOTS SHALL BE WELL-DISTRIBUTED THROUGHOUT THE
- INSTALLATION. PANEL MEMBERS SHALL BE SELECT KNOTTY (NLGA 204A). POSTS SHALL BE SELECT STRUCTURAL POST AND TIMBER (NLGA 131A). RETENTION OF 20 KG/SQ. M. SURFACE DENSITY. ALL WOOD TO BEAR GRADING STAMP OF C.L.S. CERTIFIED AGENCY. 5. MOISTURE CONTENT OF WOOD SHALL NOT EXCEED 19% AT TIME OF
- CONSTRUCTION. 6. STAIN ALL EXPOSED FENCE MATERIAL WITH TWO COATS OF STAIN
- TO BE DETERMINED BY CONSULTANT. 7. NAILS SHALL BE GALVANIZED ARDOX CONFORMING TO CSA STANDARD BILL
- 8. LAG SCREWS AND BOLTS SHALL BE GALVANIZED AND SHALL CONFORM TO ASTM A307.
- 9. ALL GALVANIZING TO BE HOT DIPPED IN CONFORMANCE TO CSA STANDARD G164 10. COUNTER-SINK ALL LAG SCREWS AND BOLTS AND DRIVE ALL NAIL
- HEADS BELOW SURFACE OF WOOD. USE SUFFICIENT SIZE AND QUANTITY OF NAILS TO ENSURE A STABLE, SECURE STRUCTURE. 11. STEP FENCE PANELS MAXIMUM OF 150mm AT POSTS AS REQUIRED
- BY GRADE CONDITIONS. 12. ALL LUMBER SIZES ARE ACTUAL SIZES RATHER THAN NOMINAL
- 13. CONCRETE TO HAVE MINIMUM COMPRESSIVE STRENGTH OF 25MPa @ 28 DAYS WITH 5-7% AIR ENTRAINMENT. 14. ALL MEASUREMENTS ARE IN MILLIMETRES UNLESS STATED
- OTHERWISE
- 15. REFER TO PLANS FOR FENCE LOCATION

WOOD PRIVACY FENCE

3. RIVERSTONE SHALL THEN BE LIGHTLY COMPACTED TO EMBED INTO BEDDING COURSE.

APPEARANCE IS ACHIEVED WITHOUT VOIDS.

**BEACHSTONE** 

1. RIVERSTONE SHALL BE FREE FROM CRACKS AND FISSURES, AND SHALL BE FREE FROM SAND CLAY AND OTHER DELETERIOUS

2. RIVERSTONE SHALL BE PLACED OVER THE LIMESTONE SCREENING BEDDING COURSE SUCH THAT AN OVERALL LEVEL

"PERMALOCK" ALUMINUM EDGING

ONLY ADJACENT TO SODDED,

SEEDED, OR PLANTED AREAS.

50mm DIA. TO 75mm DIA.

BUILDING/CURB FACE

RIVERSTONE


OR PVC BLACK EDGING INSTALLED

LIMESTONE SCREENING BEDDING

MINIMUM UNIFORM DEPTH OF 75mm.

COURSE LOOSELY SPREAD TO A

WELL COMPACTED SUBGRADE

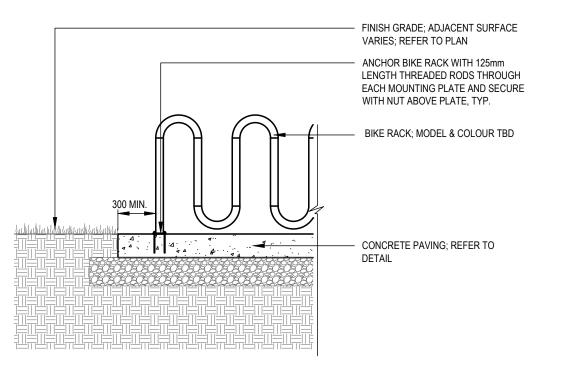



- BENCH MANUFACTURER: TBD 2. CONTRACTOR TO PROVIDE SHOP DRAWINGS
- IN ACCORDANCE WITH SPECIFICATION. CONTRACTOR TO LEVEL BENCH AND SECURE


D-1/


- DRIVE LAG BOLTS INTO CONCRETE 4. CONTRACTOR TO DEFORM LAG BOLT HEADS
- ONCE INSTALLATION IS COMPLETE 5. ALL FASTENING HARDWARE TO BE HOT DIPPED GALVANIZED
- 6. ALL SITE FURNISHINGS TO BE FIELD LOCATED WITH SITE INSPECTOR PRIOR TO
- INSTALLATION 7. ALL MEASUREMENTS ARE IN MILLIMETRES
- UNLESS STATED OTHERWISE. REFER TO PLANS


**BIKE RACK** N.T.S.

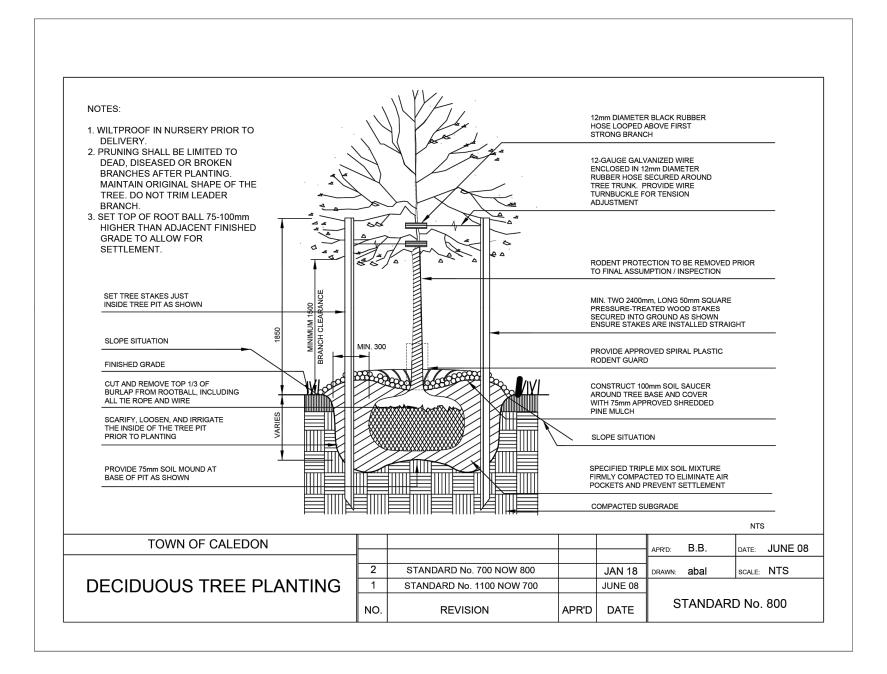

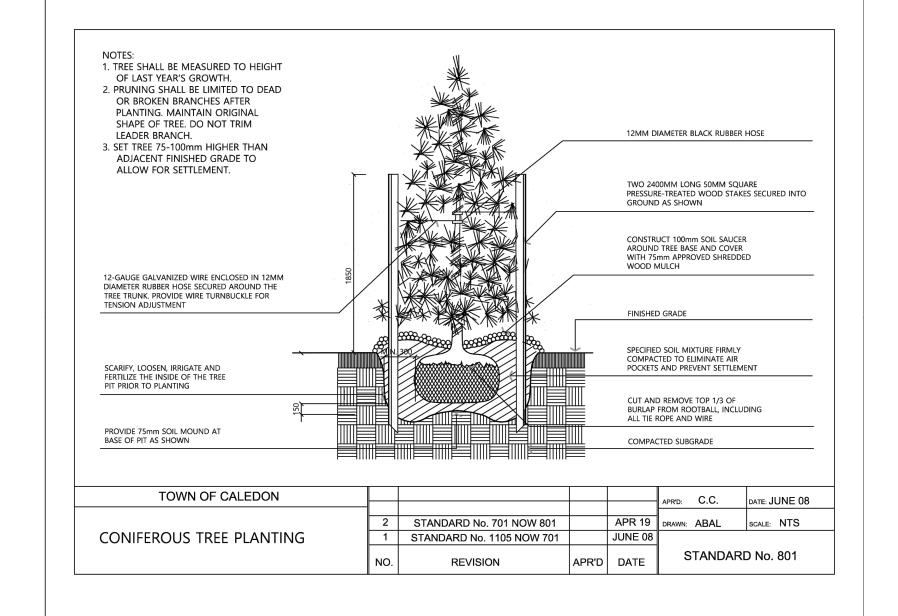


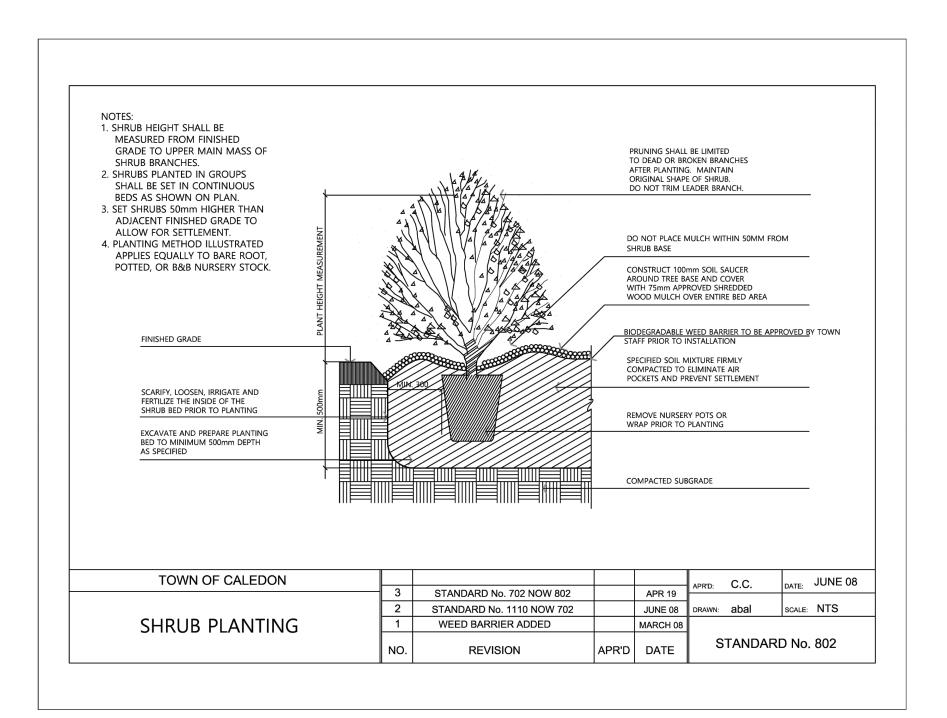

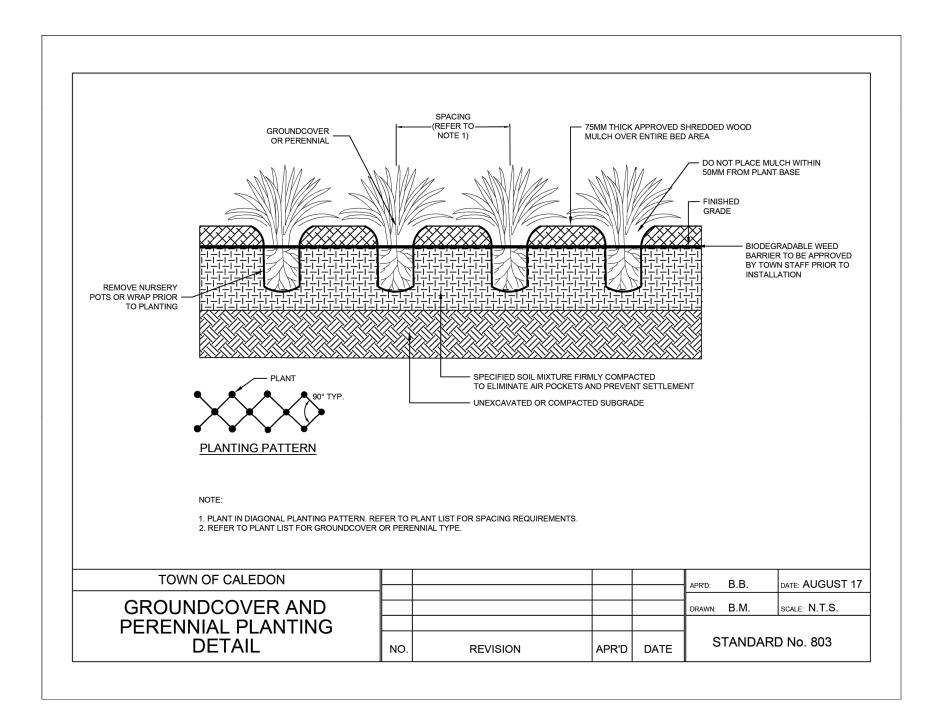


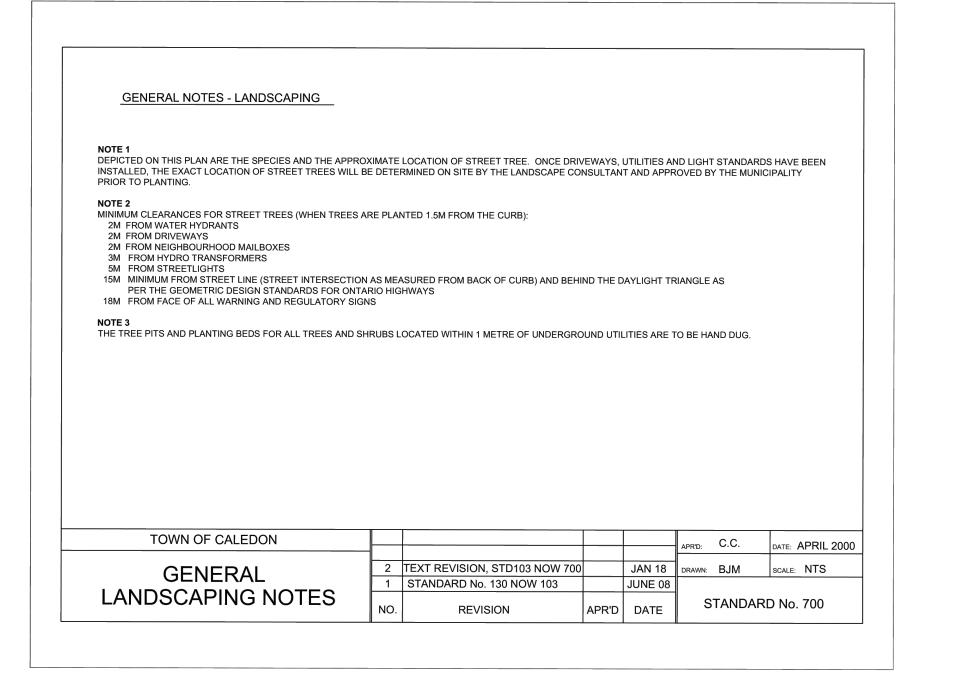

**TOWN OF CALEDON** PLANNING RECEIVED March 4, 2025

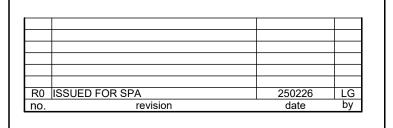

THESE DRAWINGS ARE THE PROPERTY OF LANDSCAPE PLANNING LIMITED AND SHALL NOT BE ALTERED, MODIFIED, REVISED OR CHANGED WITHOUT THE WRITTEN CONSENT OF LANDSCAPE PLANNING LIMITED. SEAL IS NOT VALID WITHOUT SIGNATURE OF THE LANDSCAPE ARCHITECT. DRAWINGS CANNOT BE USED FOR TENDER/CONSTRUCTION UNTIL SIGNED BY LANDSCAPE ARCHITECT.



project number 2024-046



project title **BOLTON VILLAGE** 

13656 & 13668 EMIL KOLB PARKWAY

BOLTON, ON

city file: municipality: TOWN OF BOLTON

drawing title

**DETAILS** 

NOV. 2024

	drawn by	reviewed by	drawing number:
	ZC	JS	
	data	coolo	D-1
I	ı date	Scale	

N.T.S. (24x36")