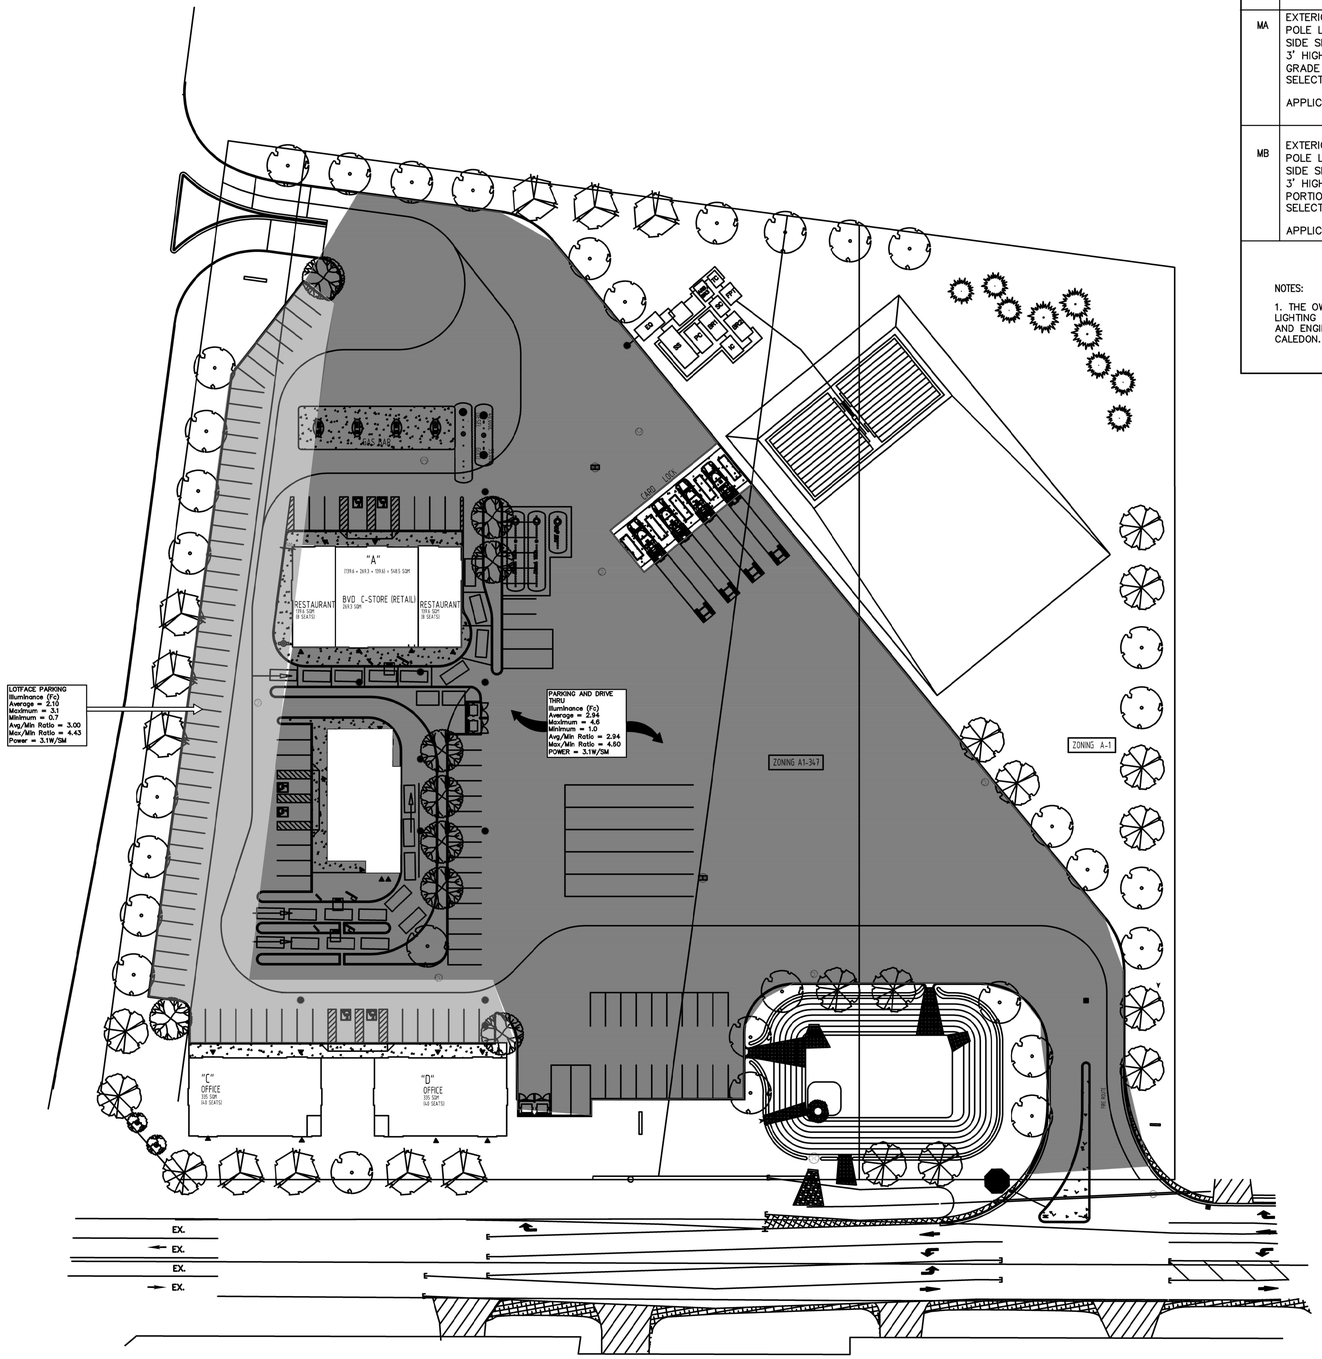

LUMINAIRE SCHEDULE

TYPE	DESCRIPTION	LAMPS AND BALLAST	CATALOGUE NO.	IMAGE.
MA	EXTERIOR SINGLE HEAD HIGH PERFORMANCE POLE LUMINAIRE, FULL CUT-OFF, C/W HOUSE SIDE SHIELD. OVERALL HEIGHT IS 40' INCLUDING 3' HIGH CONCRETE BASE ABOVE FINISHED GRADE PORTION. FINISH AS PER ARCHITECT'S SELECTION. APPLICATION: SITE	316W LED 36656LM AND 208V DRIVER, 4000K,70CRI. TOTAL INSTALLED 1264WATTS	NLS LIGHTING VSS SERIES #1-NV-2-T5-96L-1-40K-HSS POLE NOM 37' TALL	
MB	EXTERIOR DOUBLE HEAD HIGH PERFORMANCE POLE LUMINAIRE, FULL CUT-OFF, C/W HOUSE SIDE SHIELD. OVERALL HEIGHT IS 40' INCLUDING 3' HIGH CONCRETE BASE ABOVE FINISHED GRADE PORTION. FINISH AS PER ARCHITECT'S SELECTION. APPLICATION: SITE	316W LED 35075LM AND 208V DRIVER, 4000K,70CRI. TOTAL INSTALLED 948WATTS	NLS LIGHTING VSS SERIES #2-NV-2-T4-96L-1-40K-HSS POLE NOM 37' TALL	

NOTES:

1. THE OWNER COVENANTS AND AGREES TO CONSTRUCT AND INSTALL "SHIELDED" LIGHTING FIXTURES ON THE SUBJECT LANDS, IN CONFORMITY WITH THE SITE PLAN AND ENGINEER CERTIFIED LIGHTING PLAN TO THE SATISFACTION OF THE CITY OF CALEDON. .

Jain
7405 East Danbro Crescent, 2nd Floor
Mississauga, Ontario, L5N 6P8
Tel: 905 285 9900, Fax: 905 567 5246
Email : mail@jainconsultants.com

No.	REVISION	DATE
1	ISSUED FOR SPA -	2022-12-03

STAMP

REGISTERED PROFESSIONAL ENGINEER
D. JAIN
SEP 19'22
PROVINCE OF ONTARIO
22-248

Do not scale drawings.
The Contractor shall check and verify all dimensions and report all errors and omissions to the Engineer before proceeding with the work.

A Detail No.
B Sheet No. where detailed.

The ideas/designs included herein are the sole property of Jain Sustainability Consultants Inc. They shall not be used/reproduced/altered without written consent of Jain Sustainability Consultants Inc. and full payment of associated design fees.

ORIENTATION

CLIENT

PROJECT
PROPOSED DEVELOPMENT
14927 HURONTARIO RD
CALEDON, ON

PROJECT INFORMATION
PROJECT NO: 22-248
DRAWN BY: DK
CHECKED BY: RH
DATE:
SCALE: NOTED

DRAWING
SITE PLAN
-ELECTRICAL
PHOTOMETRICS

DRAWING No.
E104

TOWN OF CALEDON
PLANNING
RECEIVED
April 21, 2025